

Exp No: 14

EMBEDDED C PROGRAM TO DISPLAY “HELLO WORLD” MESSAGE

AIM:

To write an Embedded C program to display “HELLO WORLD” message using Keil software.

Program:


```
#include <reg51.h> #include <stdio.h>

void main (void){

    SCON = 0x50; /* SCON: mode 1, 8-bit UART, enable rcvr */ TMOD = 0x20; /* TMOD:
timer 1, mode 2, 8-bit reload */ TH1 = 0xFD; /* TH1: reload value for 9600 baudrate */

    TR1 = 1; /* TR1: timer 1 run */

    TI = 1; /* TI: set TI to send first char of UART */ while (1)
    {
        printf ("Hello World ! \n ");
    }
}
```

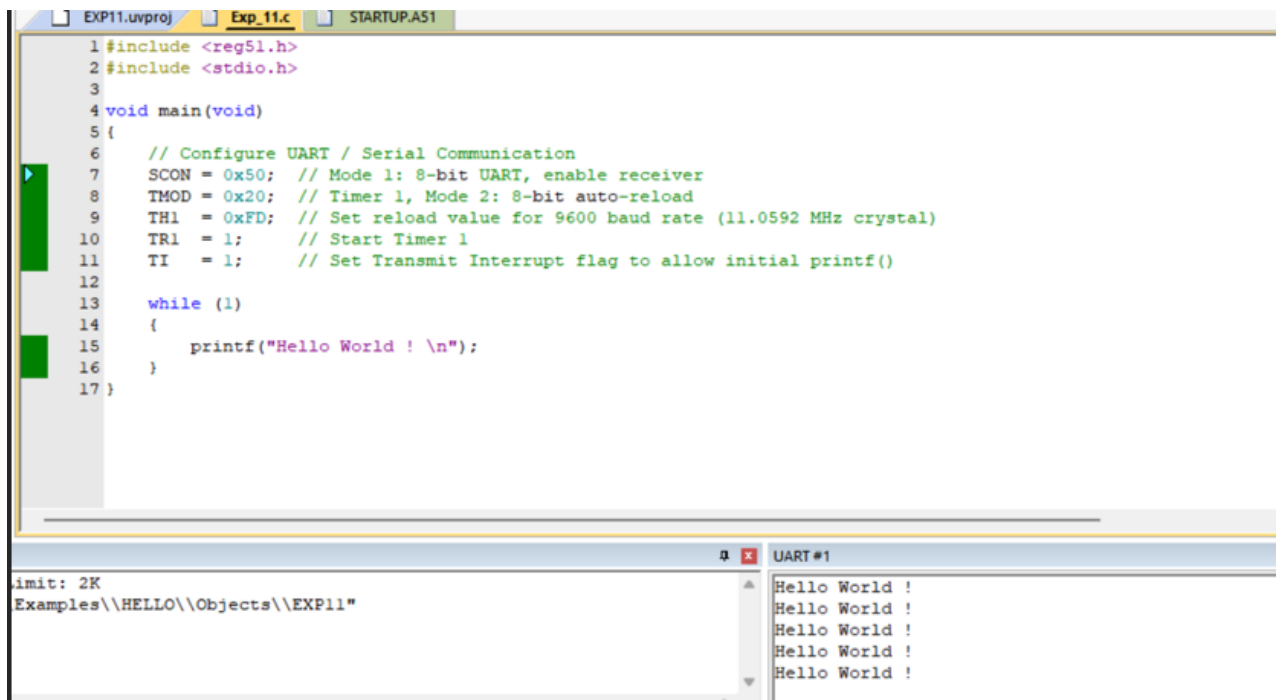

```
1#include <reg51.h>
2#include <stdio.h>
3
4void main(void)
5{
6    // Configure UART / Serial Communication
7    SCON = 0x50; // Mode 1: 8-bit UART, enable receiver
8    TMOD = 0x20; // Timer 1, Mode 2: 8-bit auto-reload
9    TH1 = 0xFD; // Set reload value for 9600 baud rate (11.0592 MHz crystal)
10   TR1 = 1;    // Start Timer 1
11   TI = 1;    // Set Transmit Interrupt flag to allow initial printf()
12
13   while (1)
14   {
15       printf("Hello World ! \n");
16   }
17 }
```

UART #1

```
Hello World !
Hello World !
Hello World !
Hello World !
Hello World !
```