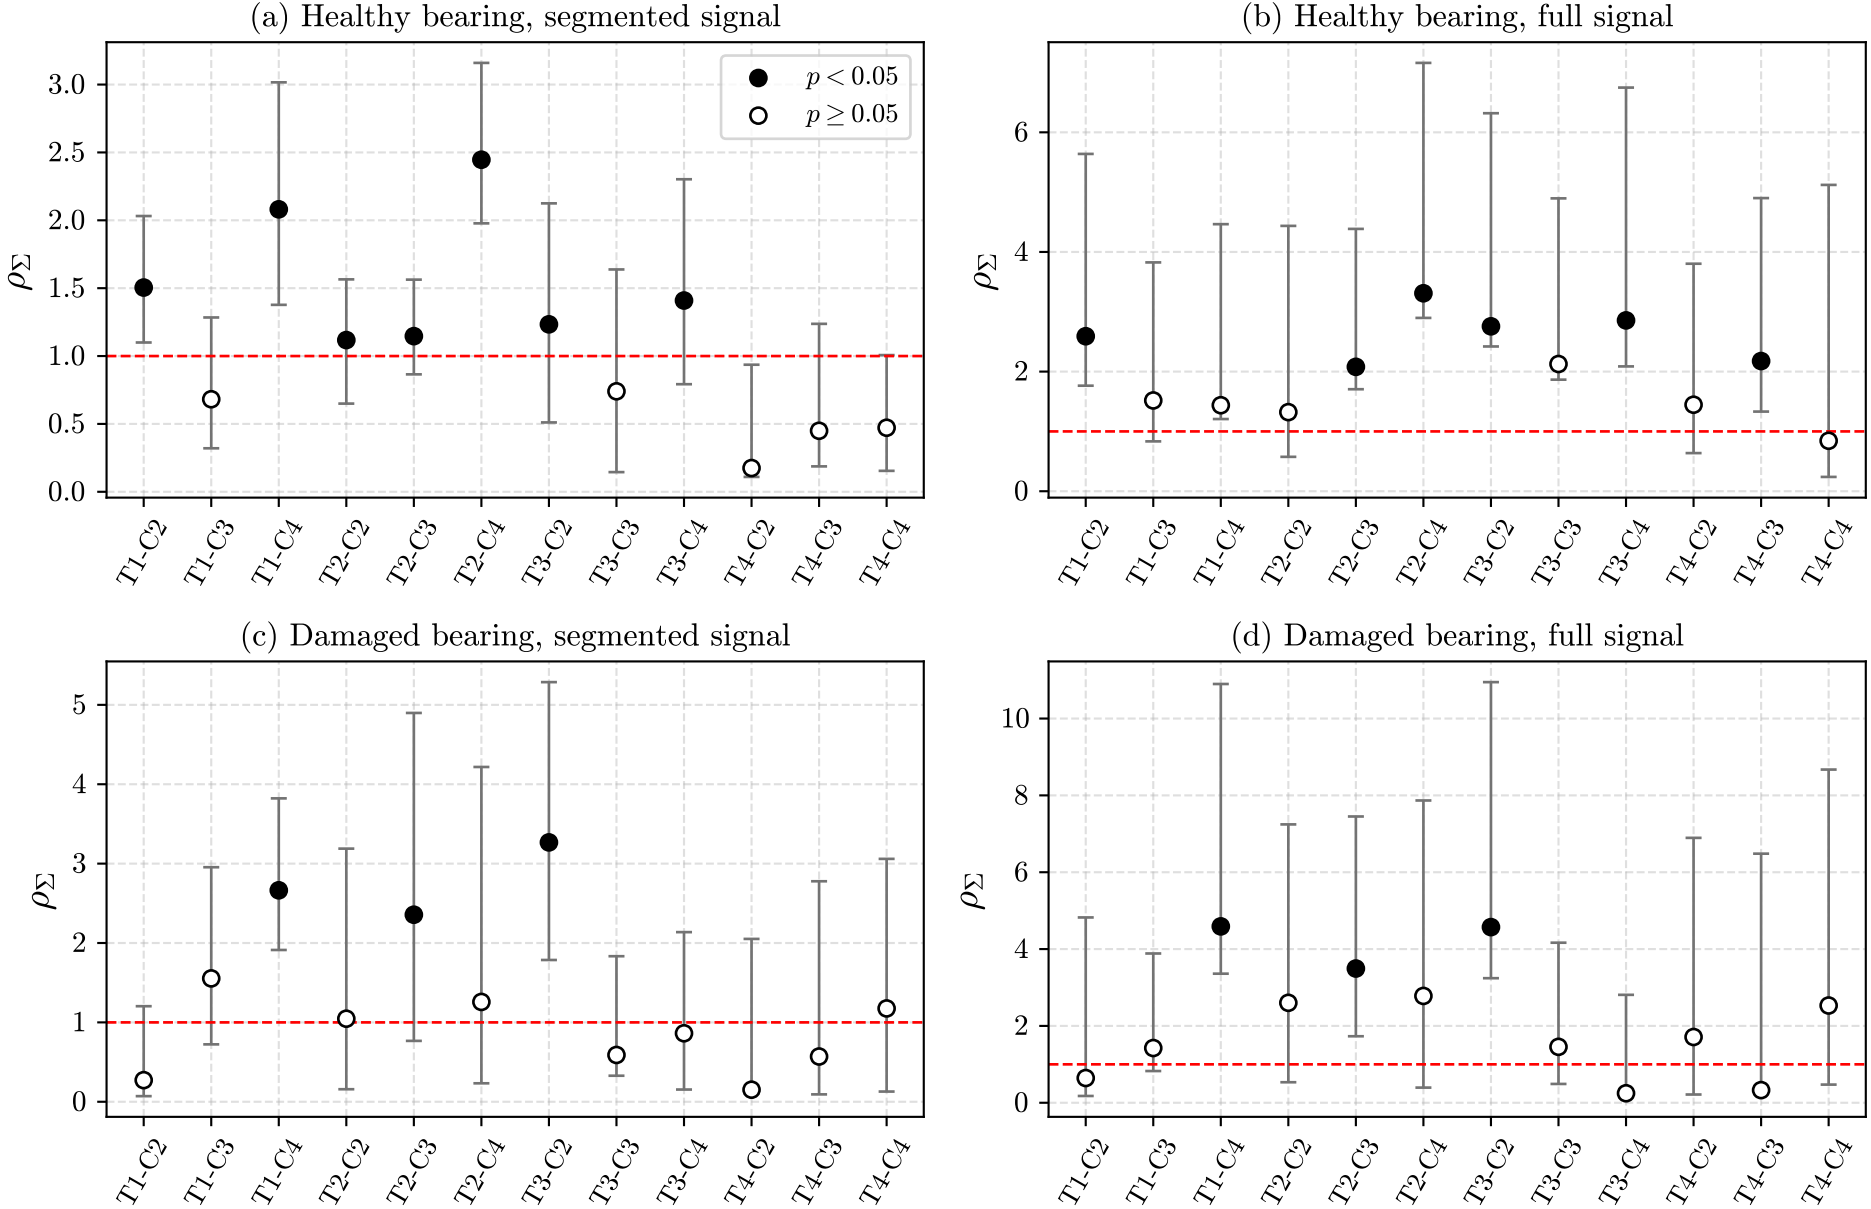
(a) Healthy bearing, segmented signal
(b) Healthy bearing, full signal
(c) Damaged bearing, segmented signal
(d) Damaged bearing, full signal
$p < 0.05$
$p \geq 0.05$
ρ_Σ
T1-C2
T1-C3
T1-C4
T2-C2
T2-C3
T2-C4
T3-C2
T3-C3
T3-C4
T4-C2
T4-C3
T4-C4