


Product Data Sheet


Range: Precision Haptic
 Title: 10mm Linear Resonant Actuator
 Type: Undefined
 Model: C10-100

10mm Linear Resonant
 Actuator
 4mm Type
 Shown on 6mm Isometric Grid

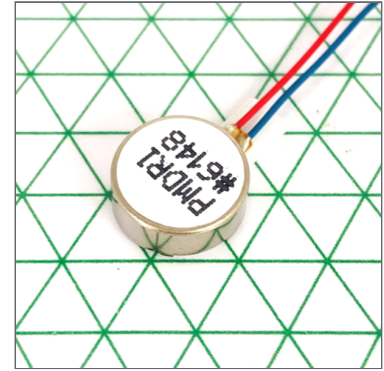

| KEY FEATURES | |
|---------------------------------|-----------------------|
| Body Diameter | 10 mm [± 0.1] |
| Body Length | 3.7 mm [± 0.15] |
| Rated Voltage (RMS) | 2 V |
| Rated Vibration Frequency | 175 Hz |
| Typical Rated Operating Current | 69 mA |
| Typical Norm. Amplitude | 1.5 G |

TYPICAL DC MOTOR PERFORMANCE CHARACTERISTICS

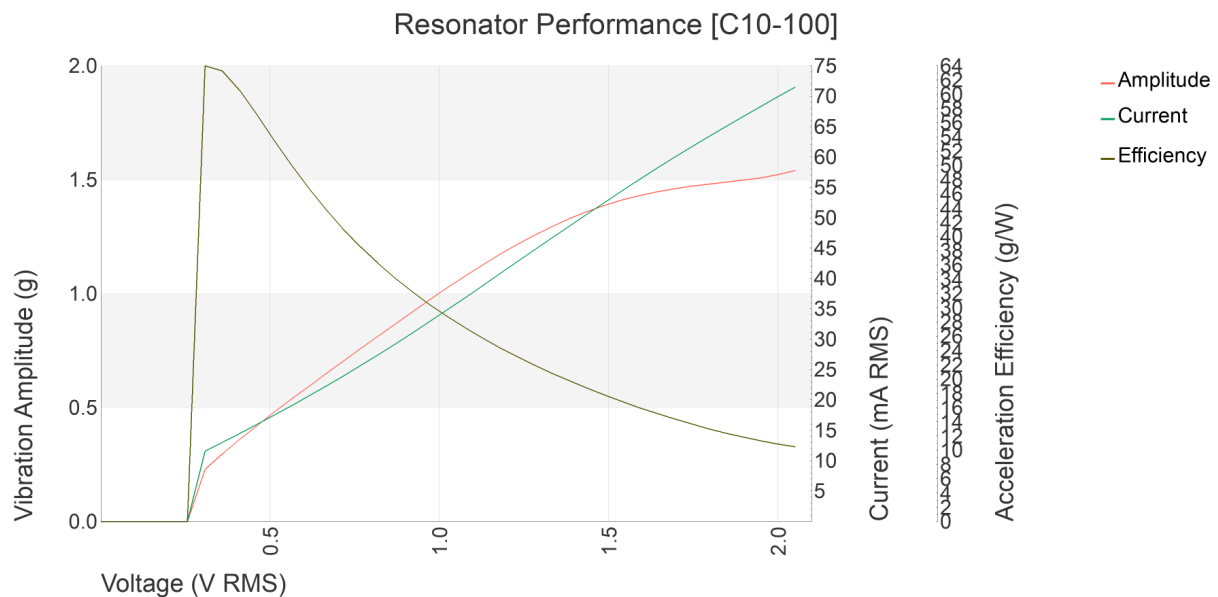

ORDERING INFORMATION

The model number fully defines the model, variant and additional features of the product. Please quote this number when ordering. For stocked types, testing and evaluation samples can be ordered directly through our online store.

FIND OUT HOW THIS PART COULD MEET YOUR SPECIFICATIONS

Email: enquiries@precisionmicrodrives.com
 Call: +44 (0) 1932 252482

Looking for the perfect design?

We can help.



Precision Microdrives is an ISO 9001:2015 trusted designer and manufacturer of miniature, cost-effective, and well engineered motors and mechanisms. We are specialists in,

- [Trusted precision motor design](#)
- [Flexible motor & mechanism manufacturing](#)
- [Dependable quality control & after-sales support](#)
- [Industry leading motor testing and validation](#)

Our UK based motor design engineers, will support you through the complex process of specifying, developing, validating, and mass manufacturing, a custom motor or mechanism. The result? A part perfect for your application.

Delivered, On-Time & To Spec.

SPEAK TO OUR DESIGN ENGINEERS TODAY


Email: enquiries@precisionmicrodrives.com
Call: +44 (0) 1932 252482

DESIGN FOR APPLICATION CASE STUDIES




ENCAPSULATED VIBRATION MOTOR FOR A CPR TRAINING DUMMY

- Low volume, high value manufacturing
- Custom CNC machined enclosure
- Optimised haptic performance
- Custom PCB including EMI filters
- Part no. 334-401.001



VIBRATION MOTOR HIGHLY OPTIMISED FOR RUGGEDISED FIRE AND POLICE EMERGENCY RADIOS

- High volume production
- Optimised for emergency services application
- Ruggedised design with custom rubber 'suspension' cover
- Custom PCB with spring legs for simplified production assembly times
- Part no. 308-104.001



PRECISION SPEED AND TORQUE CONTROLLED SERVO WITH INTEGRATED TUNABLE PID LOOP FOR SINGLE-USE SCIENTIFIC INSTRUMENT.

- Medium volume, high value assembly
- Proprietary PID controller converts cost-effective motor design into a precision servo
- Adapted control software including digital IO (to customer's specification)
- Part no. 132-100.001



CUSTOMISED PRECISION GEAR MOTOR WITH ROBUST OPTICAL ENCODER

- High volume production
- Application specific output shaft
- Tailored motor performance curves
- Rear motor shaft with noise resistant optical encoder
- Part no. 212-116.001

PHYSICAL SPECIFICATION

| PARAMETER | CONDITIONS | SPECIFICATION |
|---------------|--|-------------------|
| Body Diameter | Max body diameter or max face dimension where non-circular | 10 mm [+/- 0.1] |
| Body Length | Excl. shafts, leads and terminals | 3.7 mm [+/- 0.15] |
| Unit Weight | | 2 g |

LEADS & CONNECTORS SPECIFICATION

| PARAMETER | CONDITIONS | SPECIFICATION |
|--------------------|---|------------------|
| Lead Length | Lead lengths defined as total length or between motor and connector | 100 mm [+/- 2] |
| Lead Strip Length | | 1.5 mm [+/- 0.5] |
| Lead Wire Gauge | UL3302 | 32 AWG |
| Lead Configuration | | Straight |

OPERATIONAL SPECIFICATION

| PARAMETER | CONDITIONS | SPECIFICATION |
|------------------------------|--|----------------|
| Rated Voltage (RMS) | Sinusoidal waveform at Rated Vibration Frequency. Voltage specified as RMS | 2 V |
| Auto-Resonance Driving | Performance with drivers using auto-resonance is greatly influenced by the application. 30% (typ.) voltage reduction in driving voltage and case-by-case validation is required. | |
| Rated Vibration Frequency | | 175 Hz |
| Max. Rated Operating Current | RMS Value. At rated voltage using the inertial test load | 90 mA |
| Max. Start Voltage | Certified starting voltage. Sinusoidal waveform at Rated Vibration Frequency. Voltage specified as RMS | 0.4 V |
| Rated Inertial Test Load | Mass of standard test sled | 100 g |
| Max. Operating Voltage | Sinusoidal waveform at Rated Vibration Frequency. Voltage specified as RMS | 2.05 V |
| Min. Vibration Amplitude | Peak-to-peak value at rated voltage using the inertial test load | 1 G |
| Min. Insulation Resistance | At 50V DC between motor terminal and case | 1 MOhm |
| Resonant Frequency | | 174 Hz [+/- 7] |

FIND OUT HOW THIS PART COULD MEET YOUR SPECIFICATIONS

Email: enquiries@precisionmicrodrives.com
Call: +44 (0) 1932 252482

Important: The characteristics of the motor is the typical operating parameters of the product. The data herein offers design guidance information only and supplied batches are validated for conformity against the specifications on the previous page.

TYPICAL PERFORMANCE CHARACTERISTICS

| PARAMETER | CONDITIONS | SPECIFICATION |
|---------------------------------|--|---------------|
| Typical Rated Operating Current | RMS Value. At rated voltage using the inertial test load | 69 mA |
| Typical Vibration Amplitude | Peak-to-peak value at rated voltage using the inertial test load | 1.5 G |
| Typical Vibration Efficiency | At rated voltage using the inertial test load | 10.8 G/W |
| Typical Norm. Amplitude | Peak-to-peak vibration amplitude normalised by the inertial test load at rated voltage | 1.5 G |
| Typical Start Voltage | Sinusoidal waveform at Rated Vibration Frequency. Voltage specified as RMS | 0.25 V |
| Typical Terminal Resistance | | 27 Ohm |
| Typical Terminal Inductance | | 415 uH |

TYPICAL HAPTIC CHARACTERISTICS

| PARAMETER | CONDITIONS | SPECIFICATION |
|-------------------|---|---------------|
| Typical Lag Time | At rated voltage using the inertial test load | 8 ms |
| Typical Rise Time | At rated voltage using the inertial test load | 63 ms |
| Typical Stop Time | At rated voltage using the inertial test load | 165 ms |

ENVIRONMENTAL CHARACTERISTICS

| PARAMETER | CONDITIONS | SPECIFICATION |
|-------------------------------------|------------|---------------|
| Max. Operating Temp. | | 70 Deg.C |
| Min. Operating Temp. | | -25 Deg.C |
| Max. Storage & Transportation Temp. | | 85 Deg.C |
| Min. Storage & Transportation Temp. | | -40 Deg.C |

TYPICAL PACKING CONDITIONS


| PARAMETER | CONDITIONS | SPECIFICATION |
|-------------|------------|---------------|
| Carton Type | | Boxed Trays |

FIND OUT HOW THIS PART COULD MEET YOUR SPECIFICATIONS

Email: enquiries@precisionmicrodrives.com
Call: +44 (0) 1932 252482

Email: enquiries@precisionmicrodrives.com
Call: +44 (0) 1932 252482

Typical Resonator Frequency Response

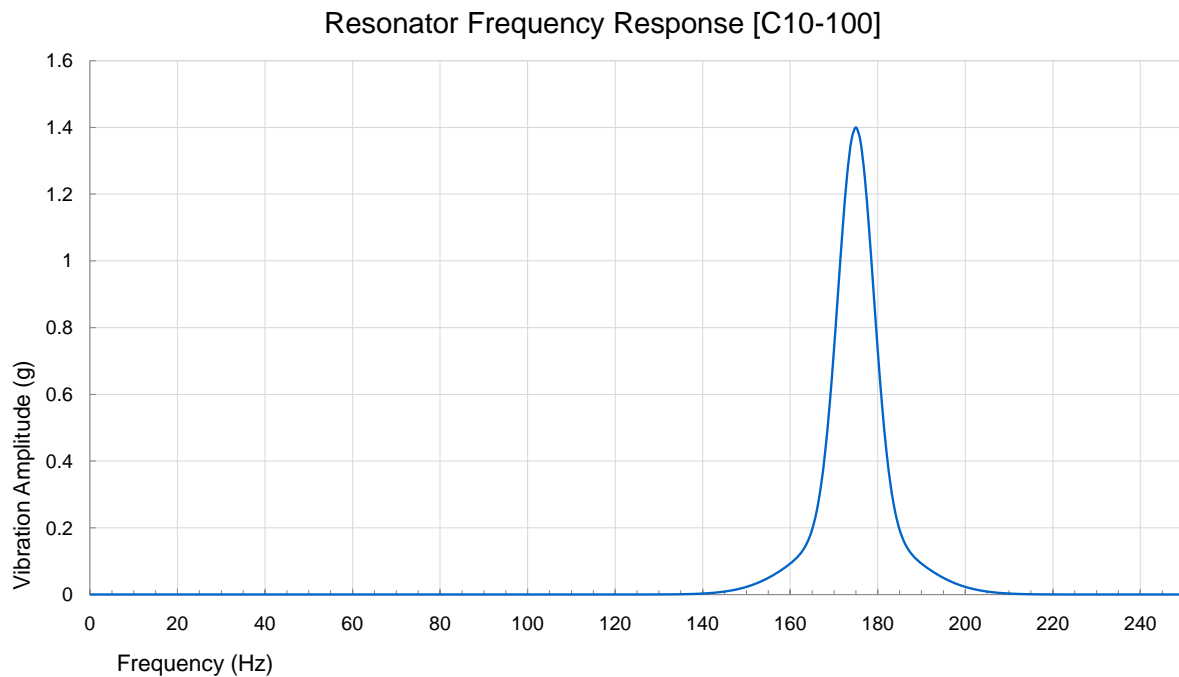

The graph above shows the typical frequency response of the linear resonator when the rated voltage is applied to it. At lower voltages the curve will be similar but the vibration amplitude will be proportionally lower.


Vibration Direction

The linear resonator produce vibration in the direction indicated on the drawing.

FIND OUT HOW THIS PART COULD MEET YOUR SPECIFICATIONS

Email: enquiries@precisionmicrodrives.com
Call: +44 (0) 1932 252482

Typical Resonator Impedance Plot

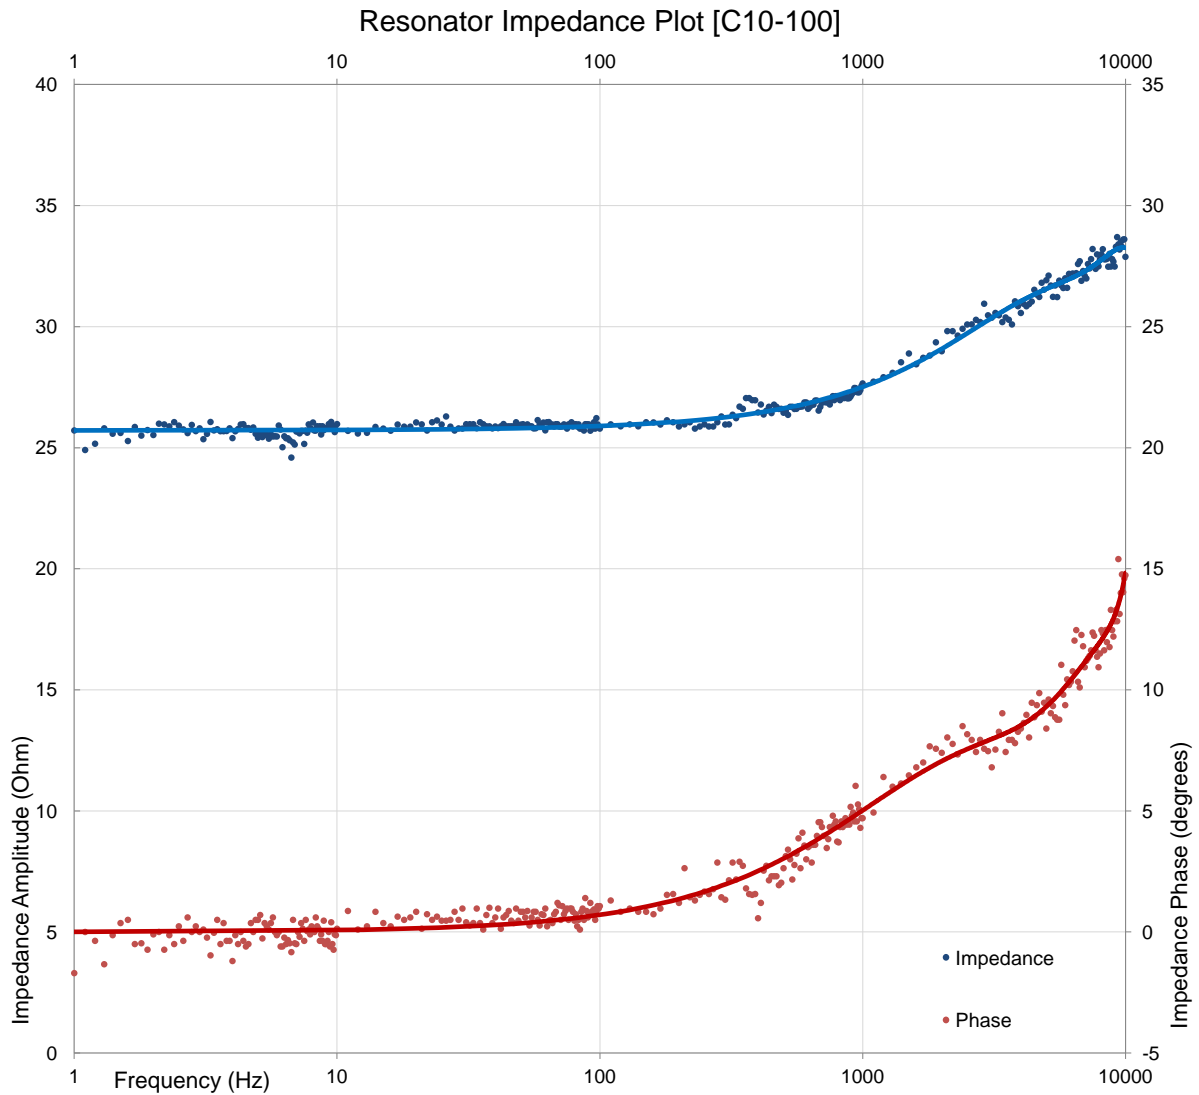

The graph above shows amplitude and phase of the resonator impedance.

FIND OUT HOW THIS PART COULD MEET YOUR SPECIFICATIONS

Email: enquiries@precisionmicrodrives.com
Call: +44 (0) 1932 252482

HOW TO ORDER

Call or email us with your order requirements at:

Email: **enquiries@precisionmicrodrives.com**

Phone: **+44 (0) 1932 252482**

Please quote the full part number when ordering or making an enquiry. Some products can be ordered in smaller volumes directly from our website: **www.precisionmicrodrives.com**

DATASHEET REVISION AND VERSION NUMBERING

We aim to provide our customer with the most detailed product information available. Sometimes changes are necessary, and these will be controlled by our engineering change request and notification process. To track datasheet versions we use both a 'production revision number' and a 'document version number'. These can be found at the bottom of every page. In some cases, such as documentation errors, the document version number can increase without triggering a product revision.

LIFE SUPPORT AND MISSION CRITICAL APPLICATION POLICY

PRECISION MICRODRIVES PRODUCTS ARE NOT AUTHORISED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR OTHER CRITICAL APPLICATION SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF PRECISION MICRODRIVES LIMITED.

As used herein:

1. Life support devices or systems are devices or systems which,
 - 1.1. are intended for surgical implant into the body, or
 - 1.2. support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user or a third party.
2. A critical component is any component of a life support device or any other system or machine whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BATCH NUMBERING, MANUFACTURING, TRACEABILITY AND LABELLING

Every part manufactured by Precision Microdrives is at minimum identified and traced via a batch number. Where physically practical, we try to make each part with a batch number. In addition, some parts carry a lot code or barcode serial numbers. If traceability is a core requirement for your purchase, let us know and we'll outline the production options for you.

STANDARD QUALITY CONTROLS AND ISO 9001

Precision quality control is one of our 3 key competitive advantages. All motors that we produce undergo 100% line inspection followed by strict and detailed batch sample testing in accordance with ISO 2859. All of the processes operated at Precision Microdrives are managed within our ISO 9001 quality system.



Precision Microdrives Limited
Unit 1.07, Canterbury Court
1-3 Brixton Road
London
SW9 6DE
United Kingdom

Tel: +44 (0) 1932 252482
Fax: +44 (0) 1932 325353
Email: enquiries@precisionmicrodrives.com
Web: www.precisionmicrodrives.com
Registered in England and Wales No. 5114621
VAT Registration. GB 900 1238 84.