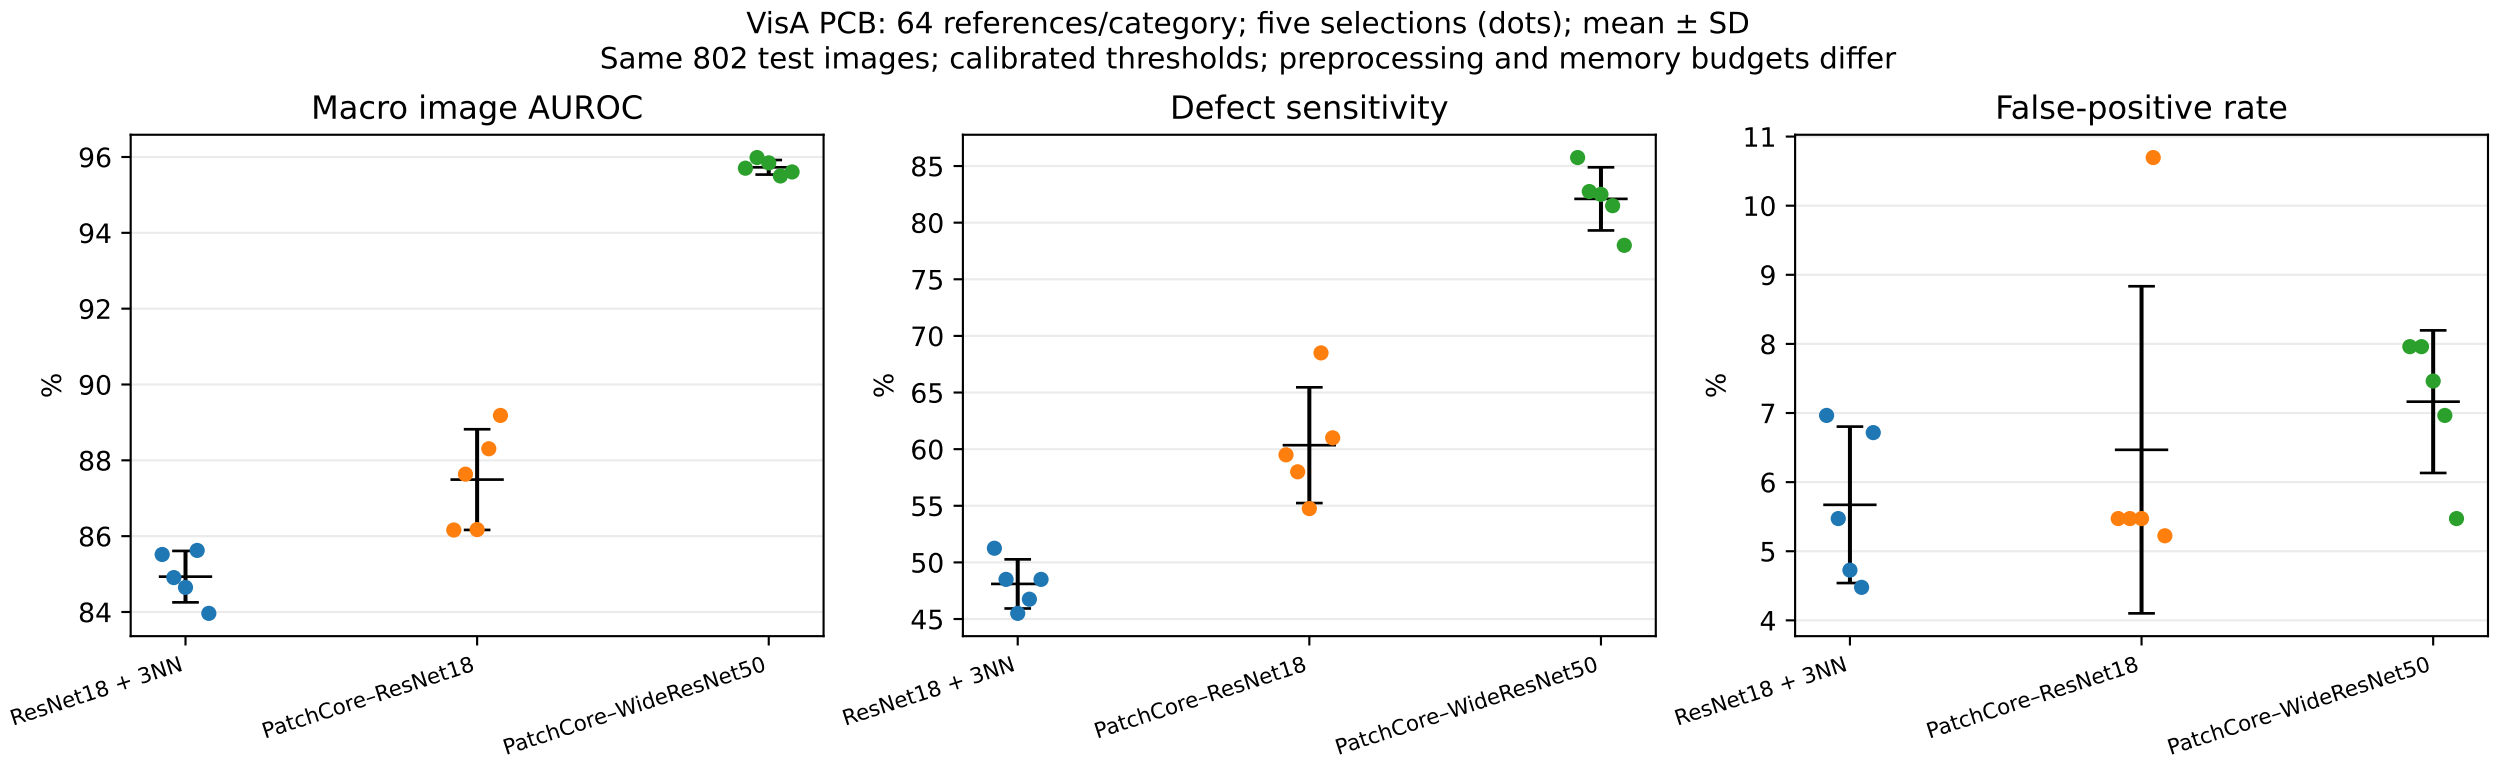
VisA PCB: 64 references/category; five selections (dots); mean ± SD
Same 802 test images; calibrated thresholds; preprocessing and memory budgets differ
Macro image AUROC
Defect sensitivity
False-positive rate
%
96
94
92
90
88
86
84
85
80
75
70
65
60
55
50
45
11
10
9
8
7
6
5
4
ResNet18 + 3NN
PatchCore–ResNet18
PatchCore–WideResNet50