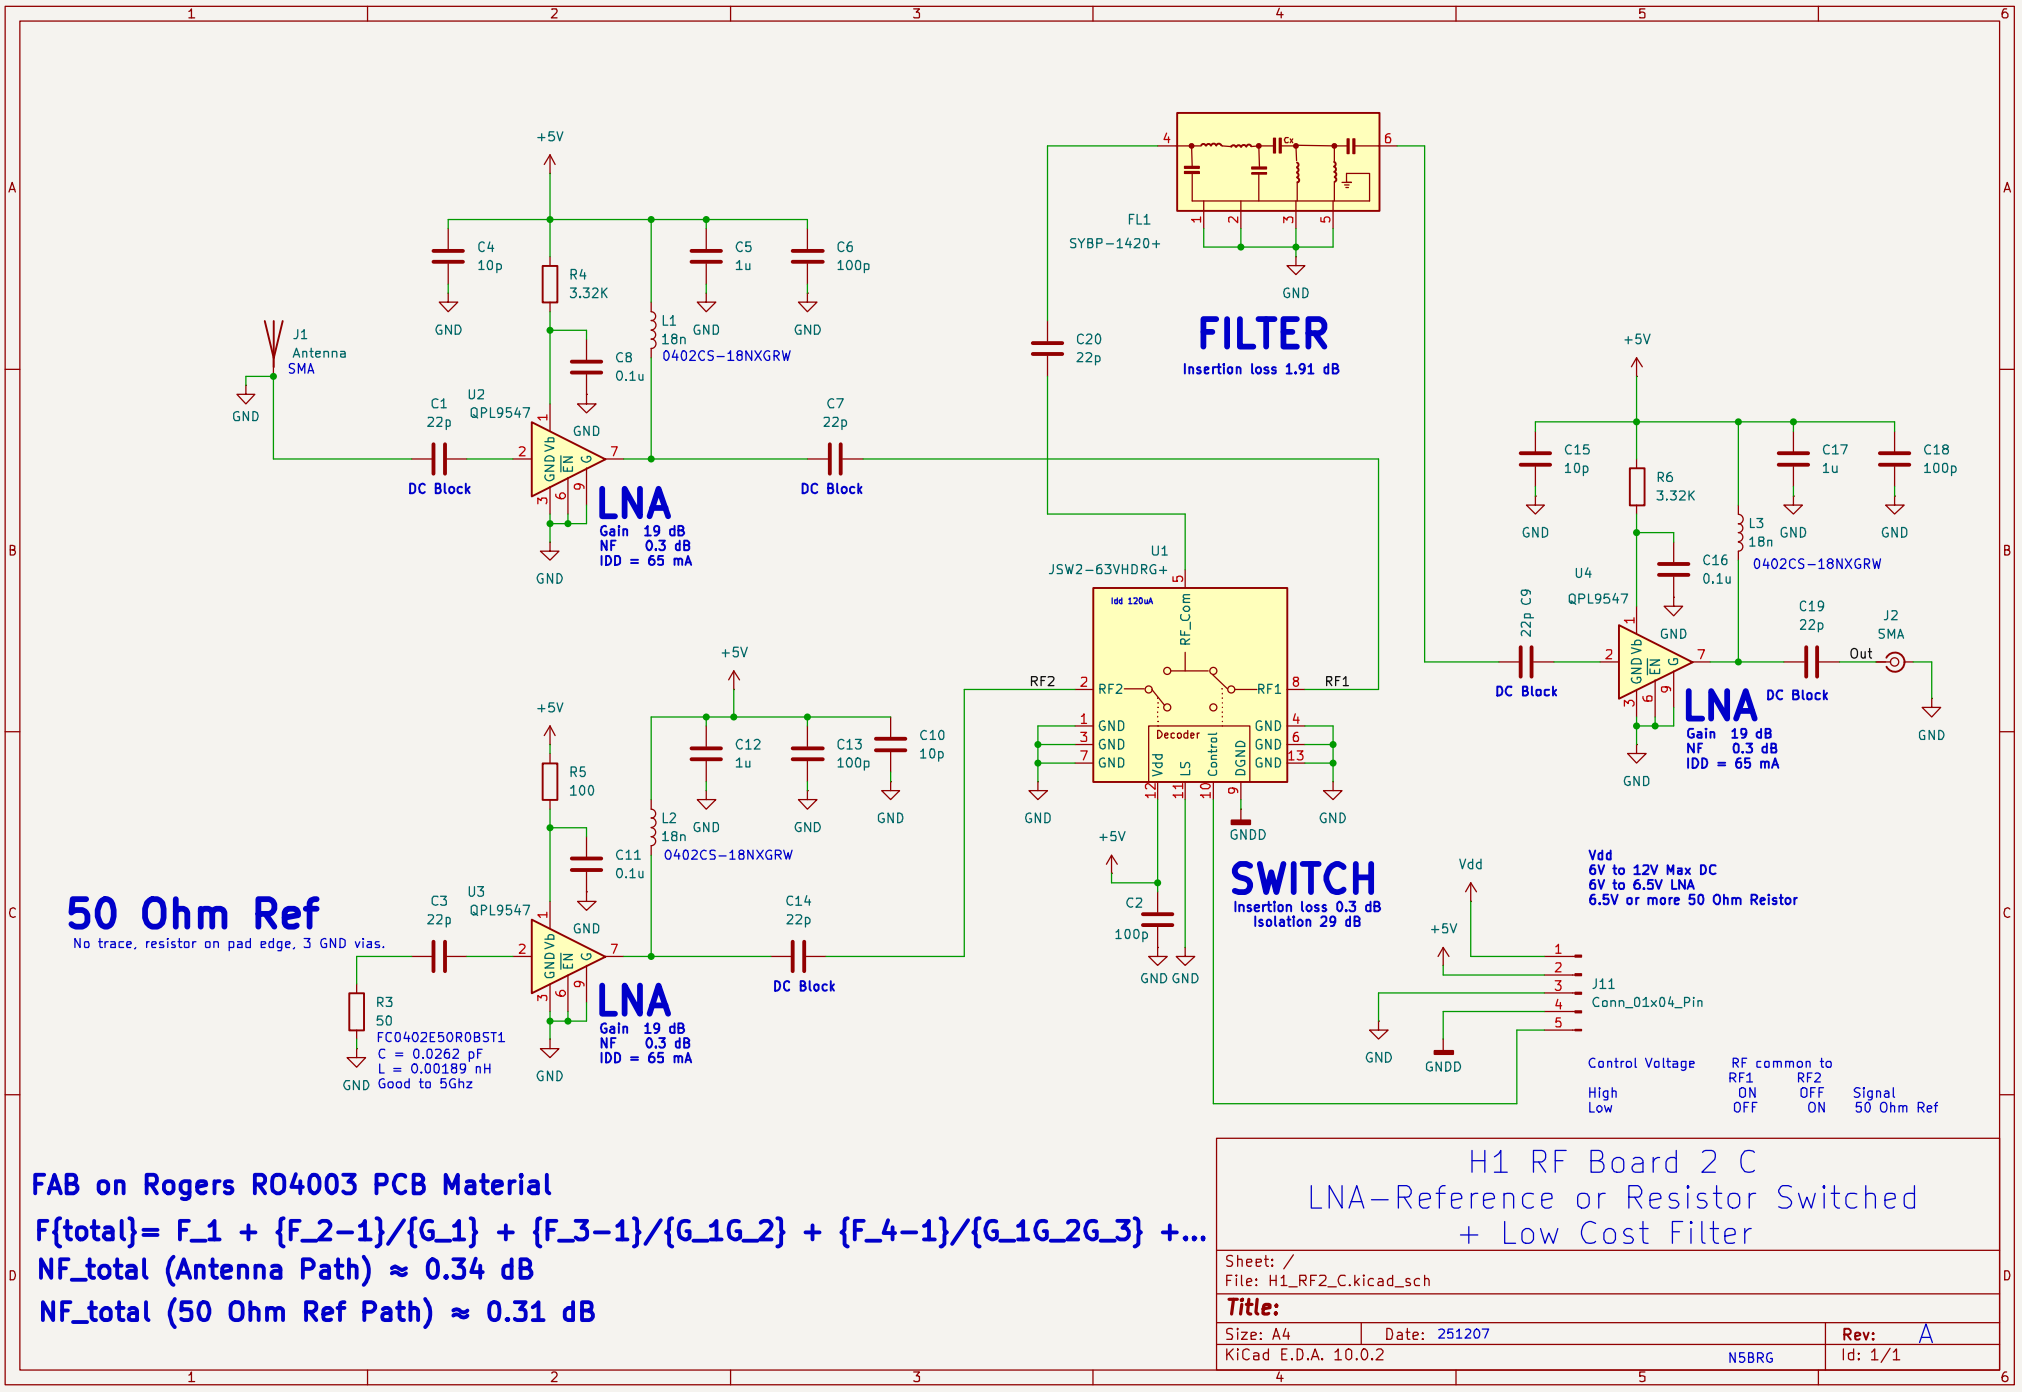

+5V
J1
Antenna
SMA
GND
C4
10p
R4
3.32K
C5
1u
C6
100p
L1
18n
0402CS-18NXGRW
C8
0.1u
C1
22p
U2
QPL9547
DC Block
LNA
Gain 19 dB
NF 0.3 dB
IDD = 65 mA
C7
22p
DC Block
FL1
SYBP-1420+
FILTER
Insertion loss 1.91 dB
C20
22p
U1
JSW2-63VHDRG+
RF_Com
RF1
RF2
Decoder
SWITCH
Insertion loss 0.3 dB
Isolation 29 dB
C2
100p
C15
10p
R6
3.32K
C17
1u
C18
100p
L3
18n
0402CS-18NXGRW
C16
0.1u
U4
QPL9547
C9
22p
C19
22p
J2
SMA
Out
DC Block
LNA
Gain 19 dB
NF 0.3 dB
IDD = 65 mA
50 Ohm Ref
No trace, resistor on pad edge, 3 GND vias.
R3
50
FC0402E50R0BST1
C = 0.0262 pF
L = 0.00189 nH
Good to 5Ghz
R5
100
C12
1u
C13
100p
C10
10p
L2
18n
0402CS-18NXGRW
C11
0.1u
U3
QPL9547
C3
22p
C14
22p
DC Block
LNA
Gain 19 dB
NF 0.3 dB
IDD = 65 mA
Vdd
6V to 12V Max DC
6V to 6.5V LNA
6.5V or more 50 Ohm Reistor
J11
Conn_01x04_Pin
Control Voltage
High
Low
RF common to
RF1 RF2
ON OFF
OFF ON
Signal
50 Ohm Ref
FAB on Rogers RO4003 PCB Material
F{total}= F_1 + {F_2-1}/{G_1} + {F_3-1}/{G_1G_2} + {F_4-1}/{G_1G_2G_3} +...
NF_total (Antenna Path) ≈ 0.34 dB
NF_total (50 Ohm Ref Path) ≈ 0.31 dB
H1 RF Board 2 C
LNA-Reference or Resistor Switched
+ Low Cost Filter
Sheet: /
File: H1_RF2_C.kicad_sch
Title:
Size: A4
Date: 251207
Rev: A
KiCad E.D.A. 10.0.2
N5BRG
Id: 1/1