


T2032 (R2TP) TP03.1 [pkt] VLAN à faire ensemble

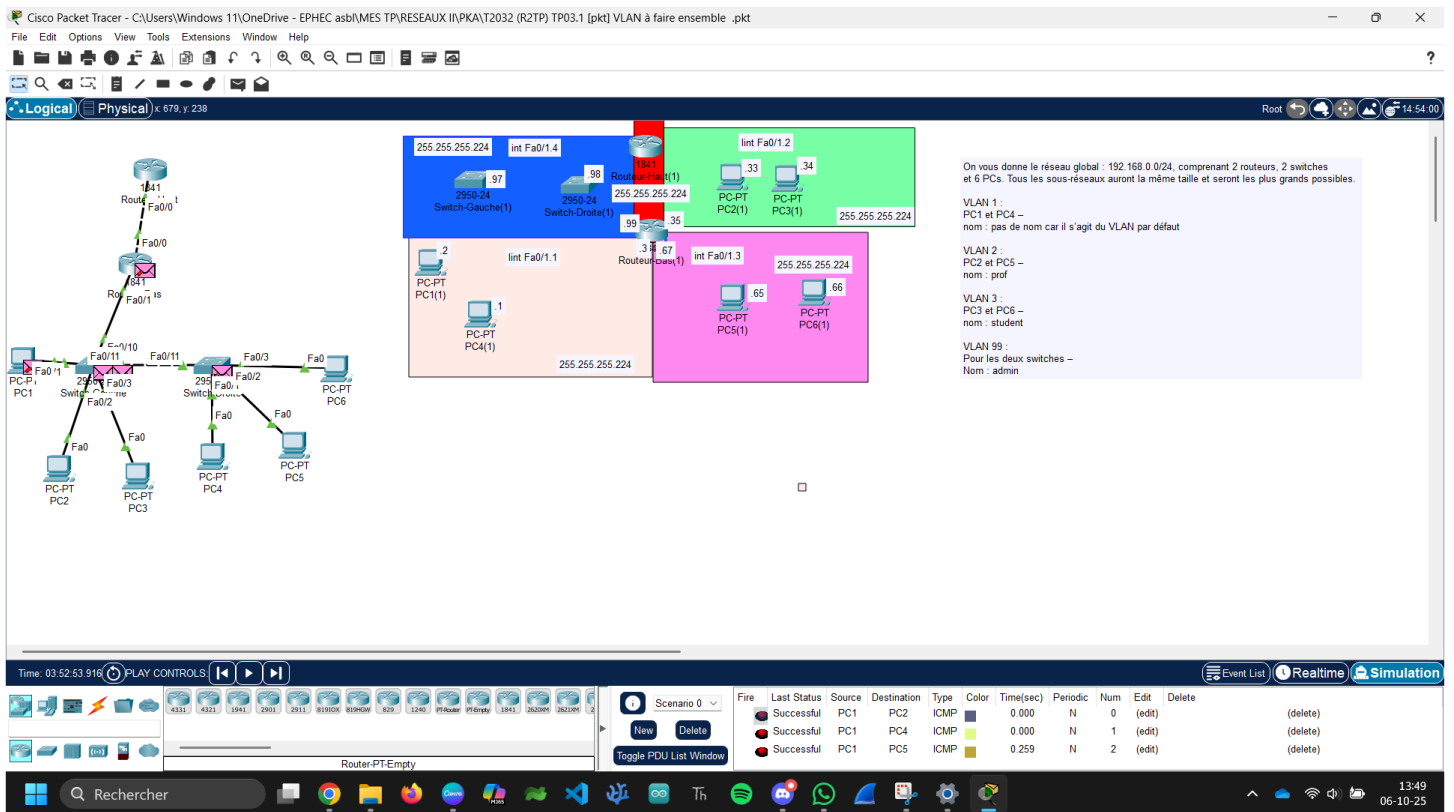

Sous reseaux 1

PC1

ip address 192.168.0.1 255.255.255.224

default gateway 192.168.0.3

PC4

ip address 192.168.0.2 255.255.255.224

default gateway 192.168.0.3

Sous reseaux 2

PC2

ip address 192.168.0.33 255.255.255.224

default gateway 192.168.0.35

PC4

ip address 192.168.0.34 255.255.255.224

default gateway 192.168.0.35

Sous reseaux 3

PC3

ip address 192.168.0.65 255.255.255.224

default gateway 192.168.0.67

PC6

ip address 192.168.0.66 255.255.255.224

default gateway 192.168.0.67

Routeur-Bas

en

conf t

int Fa0/1

no ip addr

no shut

exit

int Fa0/1.1

encapsulation dot1Q 1

ip addr 192.168.0.3 255.255.255.224

no shut

exit

int Fa0/1.2

encapsulation dot1Q 2

ip addr 192.168.0.35 255.255.255.224

no shut

exit

int Fa0/1.3

encapsulation dot1Q 3

ip addr 192.168.0.67 255.255.255.224

no shut

exit

int Fa0/1.99

encapsulation dot1Q 99

ip addr 192.168.0.99 255.255.255.224

no shut

exit

int Fa0/0

ip addr 192.168.0.129 255.255.255.224

no shut

Switch-Gauche

en

conf t

hostname Switch-Gauche

vlan 2

name prof

exit

vlan 3

name student

exit

vlan 99

name admin

exit

int Fa0/1

switchport mode access

exit

int Fa0/2

switchport mode access

switchport access vlan 2

exit

int Fa0/3

switchport mode access

switchport access vlan 3

exit

int Fa0/11

switchport mode trunk

exit

int Fa0/10

switchport mode trunk

exit

int vlan 99

ip addr 192.168.0.97 255.255.255.224

no shut

exit

ip default-gateway 192.168.0.99

Switch-Droite

en

conf t

hostname Switch-Droite

vlan 2

name prof

exit

vlan 3

name student

exit

vlan 99

name admin

exit

int Fa0/1

switchport mode access

exit

int Fa0/2

switchport mode access

switchport access vlan 2

exit

int Fa0/3

switchport mode access

switchport access vlan 3

exit

int Fa0/11

switchport mode trunk

exit

```
int vlan 99
```

```
ip addr 192.168.0.98 255.255.255.224
```

```
no shut
```

```
exit
```

```
ip default-gateway 192.168.0.99
```

Routeur-Haut

```
en
```

```
conf t
```


```
hostname Routeur-Haut
```

```
int Fa0/0
```

```
ip addr 192.168.0.130 255.255.255.224
```

```
no shut
```

T2032 (R2TP) TP03.2 [pkt] VLAN

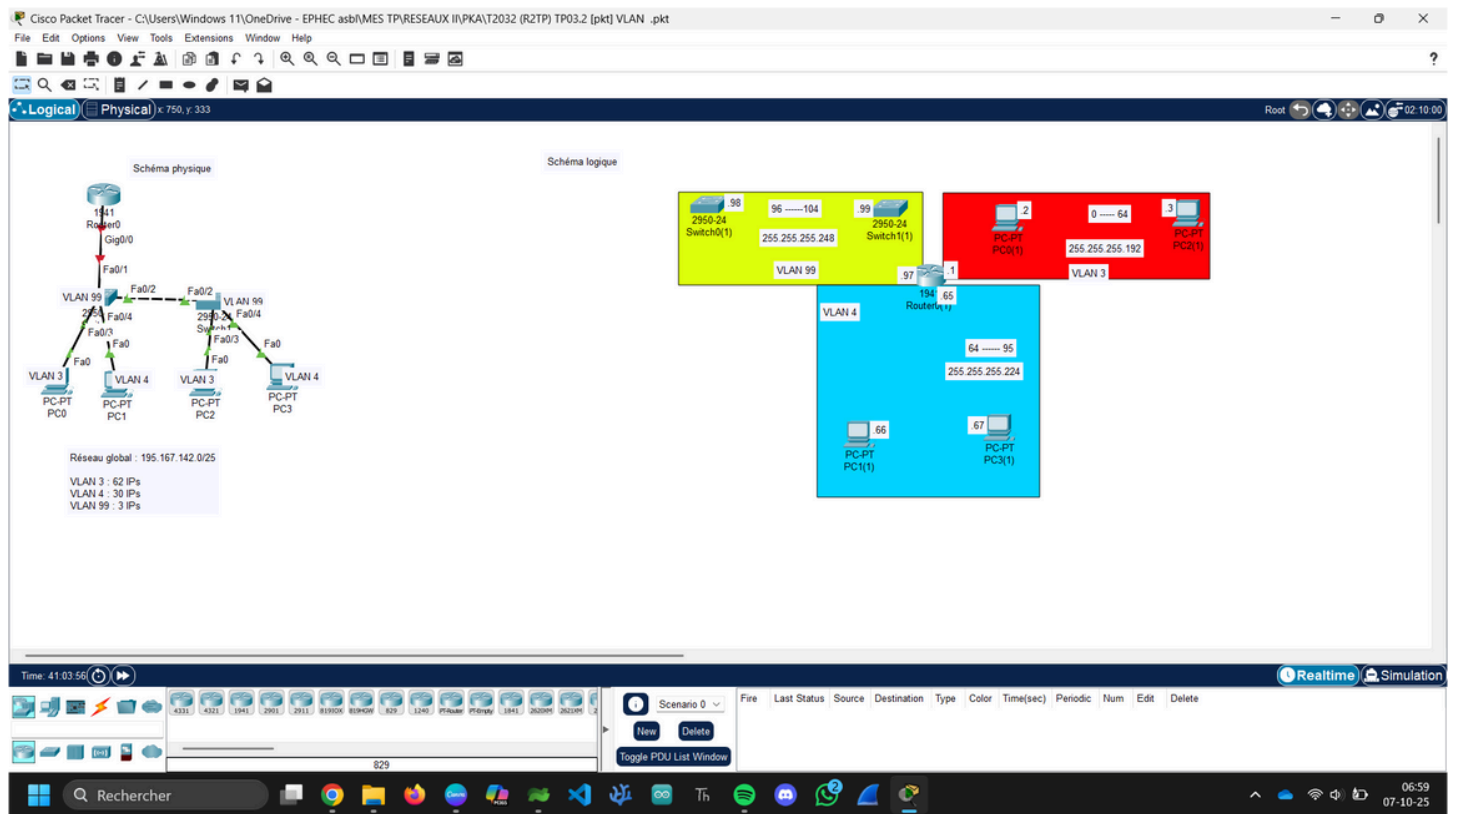

Sous reseaux 1

PC0

ip address 195.167.142.2 255.255.255.192

default gateway 195.167.142.1

PC2

ip address 195.167.142.3 255.255.255.192

default gateway 195.167.142.1

Sous reseaux 2

PC1

ip address 195.167.142.66 255.255.255.224

default gateway 195.167.142.65

PC3

ip address 195.167.142.67 255.255.255.224

default gateway 195.167.142.65

Switch0

en

conf t

hostname Switch0

vlan 3

exit

vlan 4

exit

vlan 99

exit

int Fa0/3

switchport mode access

switchport access vlan 3

exit

int Fa0/4

switchport mode access

switchport access vlan 4

exit

int Fa0/1

switchport mode trunk

exit

int Fa0/2

switchport mode trunk

exit

int vlan 99

ip addr 195.167.142.98 255.255.255.248

no shut

exit

ip default-gateway 195.167.142.97

Switch1

en

conf t

hostname Switch1

vlan 3

exit

vlan 4

exit

vlan 99

exit

int Fa0/3

switchport mode access

switchport access vlan 3

exit

int Fa0/4

switchport mode access

switchport access vlan 4

exit

int Fa0/2

switchport mode trunk

exit

int vlan 99

ip addr 195.167.142.99 255.255.255.248

no shut

exit

ip default-gateway 195.167.142.97

Router0

en

conf t

int G0/0

no ip addr

no shut

exit

int G0/0.3

encapsulation dot1Q 3

ip addr 195.167.142.1 255.255.255.192

no shut

exit

int G0/0.4

encapsulation dot1Q 4

ip addr 195.167.142.65 255.255.255.224

no shut

exit

int G0/0.99


encapsulation dot1Q 99

ip addr 195.167.142.97 255.255.255.248

no shut

exit

T2032 (R2TP) TP03.3 [pkt] VLAN et routage

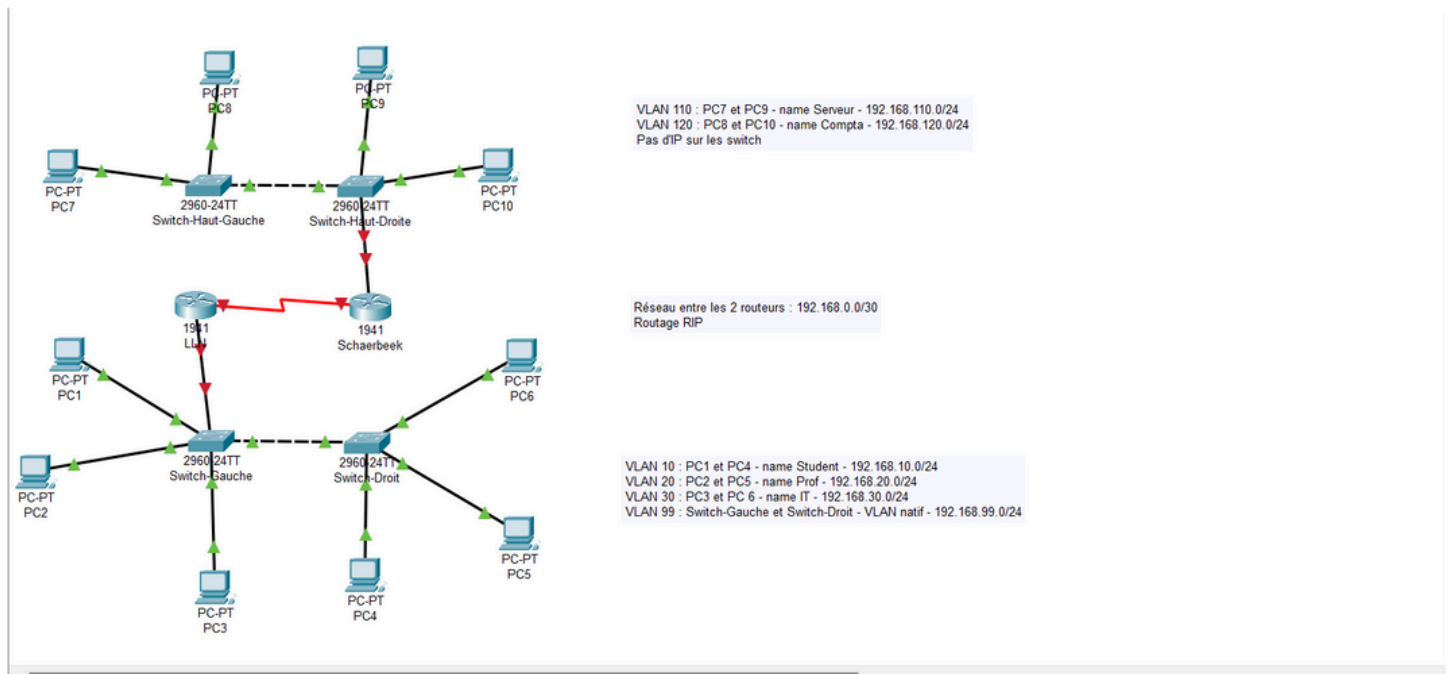

VLAN	Nom	Machines	Réseau
10	Student	PC1, PC4	192.168.10.0/24
20	Prof	PC2, PC5	192.168.20.0/24
30	IT	PC3, PC6	192.168.30.0/24
99	Native	Switch-Gauche, Switch-Droit	192.168.99.0/24

VLAN	Nom	Machines	Réseau
110	Serveur	PC7, PC9	192.168.110.0/24
120	Compta	PC8, PC10	192.168.120.0/24