

Department of Information and Communication Technology
Faculty of Technology
University of Ruhuna

Assignment – Practical

Duration: 60 min


ICT1253 – Computer Networks

Instructions

- This paper comprises three (03) pages, with one page dedicated to providing instructions, while the remaining two pages contain the question.
- You have to create a configured network topology for the below given question and save your .pkt file as **Index_Number.pkt**

NOTE: After finishing the question, you must save your configurations to **startup configuration** before saving your document.

- You need to answer questions **2, 4, and 5** in a Microsoft Word Document and save it as **Index_Number.doc** or **Index_Number.docx**.
- Submit both .pkt file and the Word document as a zip file named with your Index Number.

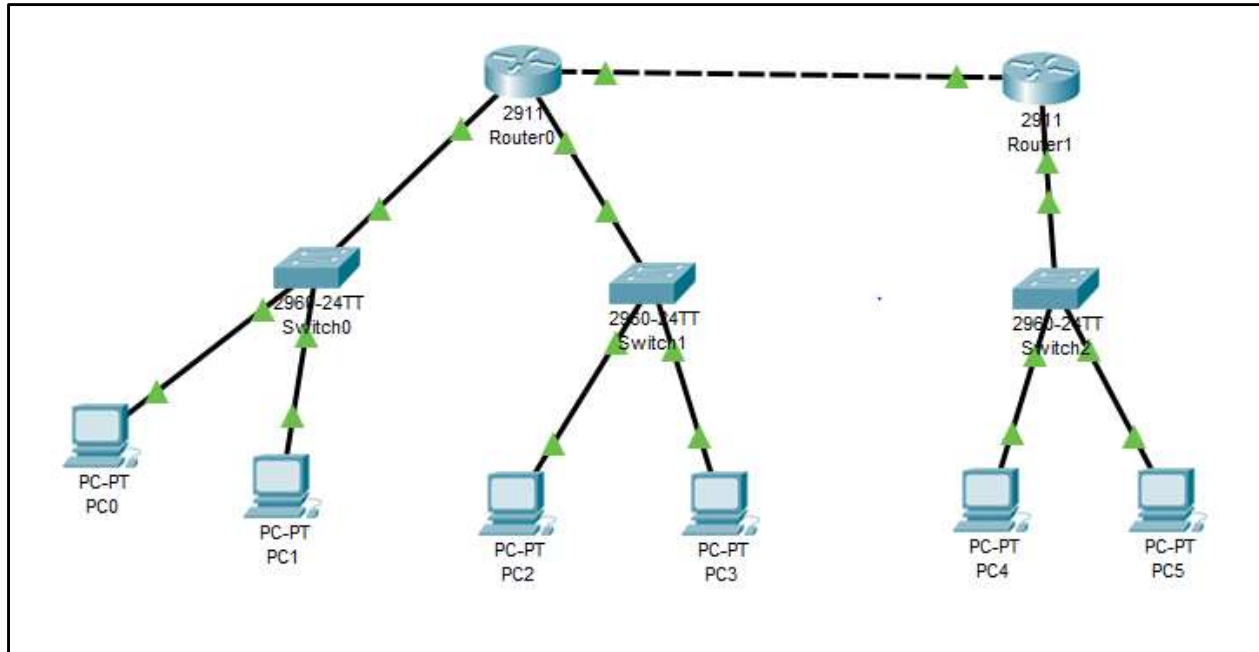

1. Open the cisco packet tracer and create the above network.

Switches 0, 1 and 2 belong to different networks and Routers 1 and 2 communicate through another network.

Following are the IP blocks of each network.

- Switch 0 → 192.168.1.0/24
- Switch 1 → 192.168.2.0/24
- Switch 2 → 192.168.3.0/24
- Routers 1 and 2 → 192.168.4.0/24

2. Create an address table for all end devices and routers according to the format given in Table 01 and clearly state what are the IP addresses that you have selected for each end device and interfaces of routers.

Devices	Interface	IP Address	Subnet Mask	Default Gateway

Table 01

3. Assign IP addresses to relevant end devices and interfaces.

4. Configure **Switch0** as follows and write the commands that you have used to configure the Router in each step in the Word document.
 - a. Assign name “S0” to Switch0
 - b. Examine the current content running configuration file
 - c. Configure the vty lines 0 15 with the password “cisco” and enable login
 - d. Configure the con 0 with the password “cisco” and enable login
 - e. Examine the content save in NVRAM
 - f. Save all the running configurations to NVRAM
 - g. Show the content in flash storage

After saving all your configurations take a copy of your configurations saved in the NVRAM and include it in your Word file.

5. Complete the configuration by adding static routes to each router.
Write the commands which have been used to write the static routes for each router in the Word document.