



per-panel $r_x = \text{corr}(C_{\text{wall}} \text{ pred}, C_{\text{wall}} \text{ FDM})$ on the FDM grid, listed strong / weak-anch / weak-unanch

—●— FDM reference - - - strong, unanchored - - - weak, anchored - - - weak, unanchored


held-out row 950, WT = 0.27 in
 $r_x = +0.63 / +0.78 / -0.83$

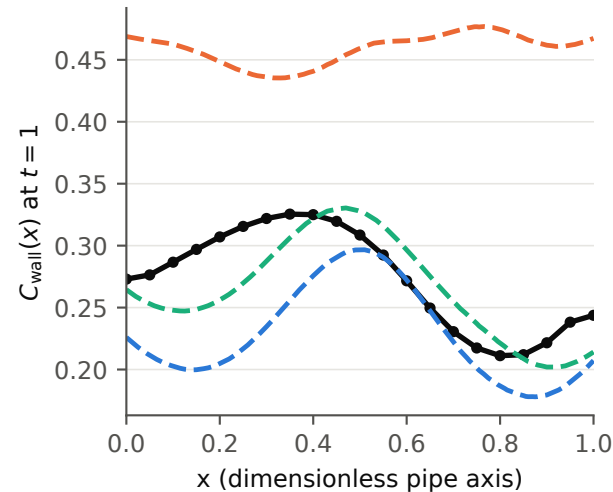

held-out row 991, WT = 0.47 in
 $r_x = +0.67 / +0.05 / -0.49$

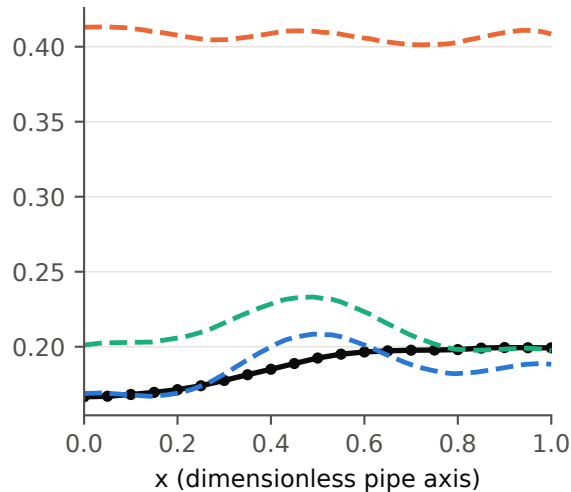

held-out row 970, WT = 0.72 in
 $r_x = +0.73 / +0.63 / +0.04$

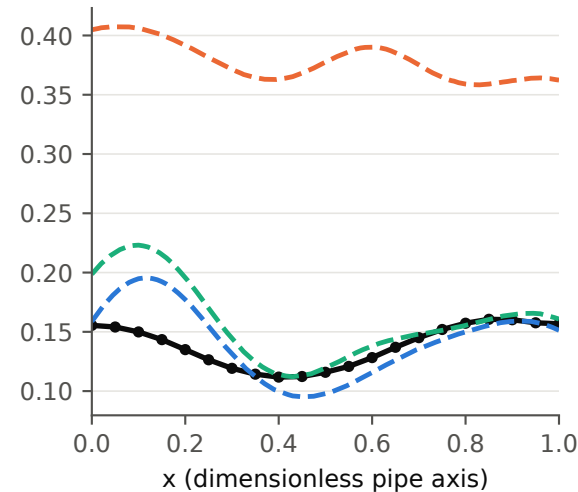

held-out row 956, WT = 0.98 in
 $r_x = +0.72 / -0.43 / +0.00$

