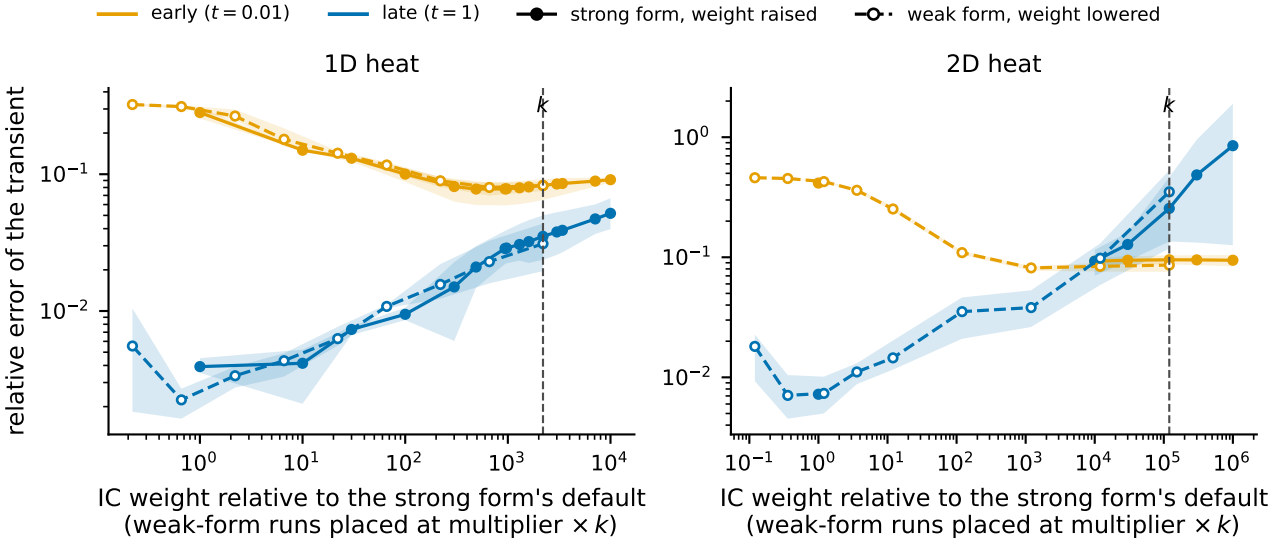
early ($t = 0.01$)
late ($t = 1$)
strong form, weight raised
weak form, weight lowered
1D heat
2D heat
relative error of the transient
10^{-1}
10^{-2}
k
10^{0}
10^{1}
10^{2}
10^{3}
10^{4}
10^{5}
10^{6}
10^{-1}
IC weight relative to the strong form's default
(weak-form runs placed at multiplier $\times k$)