Recursive SkewDCT-II wiring - 8 points to 4 points to 2 points

Conceptual grouping of the registered datapath on R01/R03. r=(2*block+1)/16; q(t)=1/[2*cos(pi*t/2)].

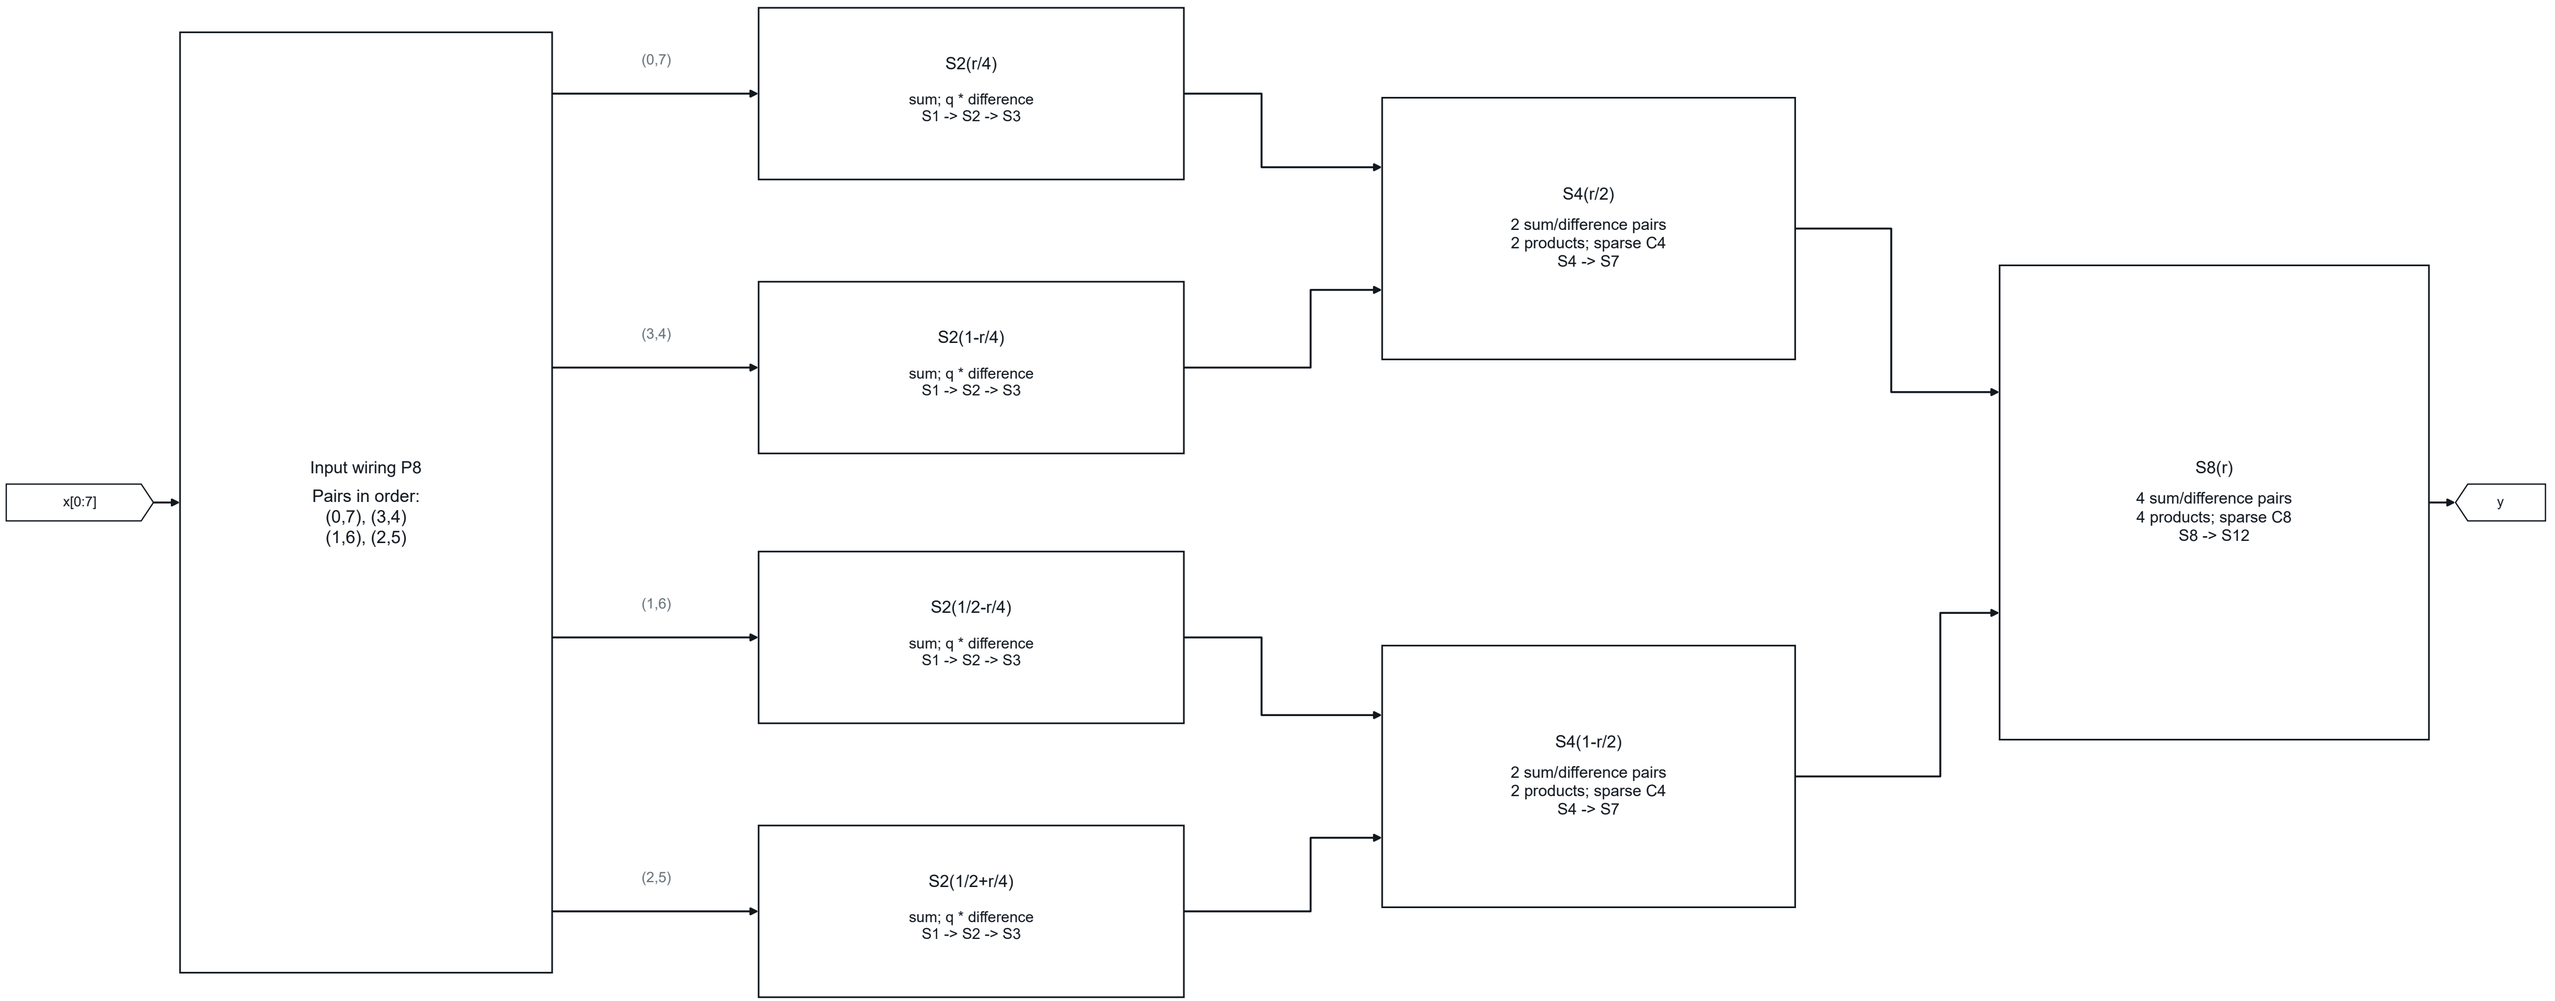

C4: z1 <- z1+z3. C8: z1 <- z1+z7; z2 <- z2+z6; z3 <- z3+z5. All other outputs pass through.

The input permutation is wiring only. Arithmetic count excludes fixed-point rounding: 4+4+4 products and 8+10+11 add/sub operations.