

RK3328-SOM-EVB

User Manual

Rev.1.0 May 2021

olimex.com

Table of Contents


Overview.....	3
General information.....	4
Order codes.....	5
RK3328-SOM-EVB Features.....	6
Software.....	7
Power supply.....	8
Hardware components.....	9
SOC.....	9
Memory.....	9
PMU.....	9
USB.....	9
Display.....	9
Audio.....	9
Connectors.....	10
EXT1.....	10
UEXT.....	11
Open Source Hardware design.....	12
Revision History.....	13
Contact information.....	14

Overview

[RK3328-SOM-EVB](#) is Evaluation board for [RK3328-SOM](#) System On Module with Quad core Cortex-A53 64 bit ARM SOC.


The [RK3328-SOM-EVB](#) allow all features of the SOM to be explored.

Top view:

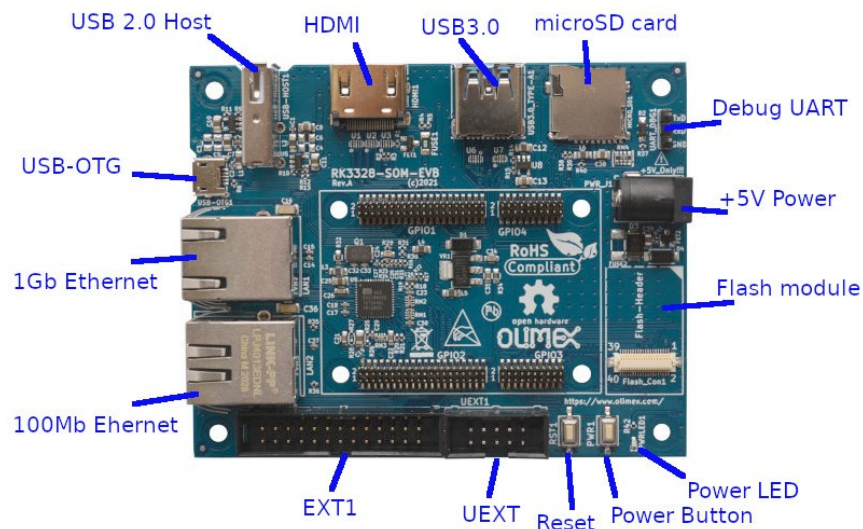

General information

[RK3328](#) SOC is Quad core Cortex-A53 running up to 1.5 Ghz, USB 3.0, 2x USB 2.0, I2S, UART, SPI, I2C, Audio Codec, DDR3L memory, HDMI.

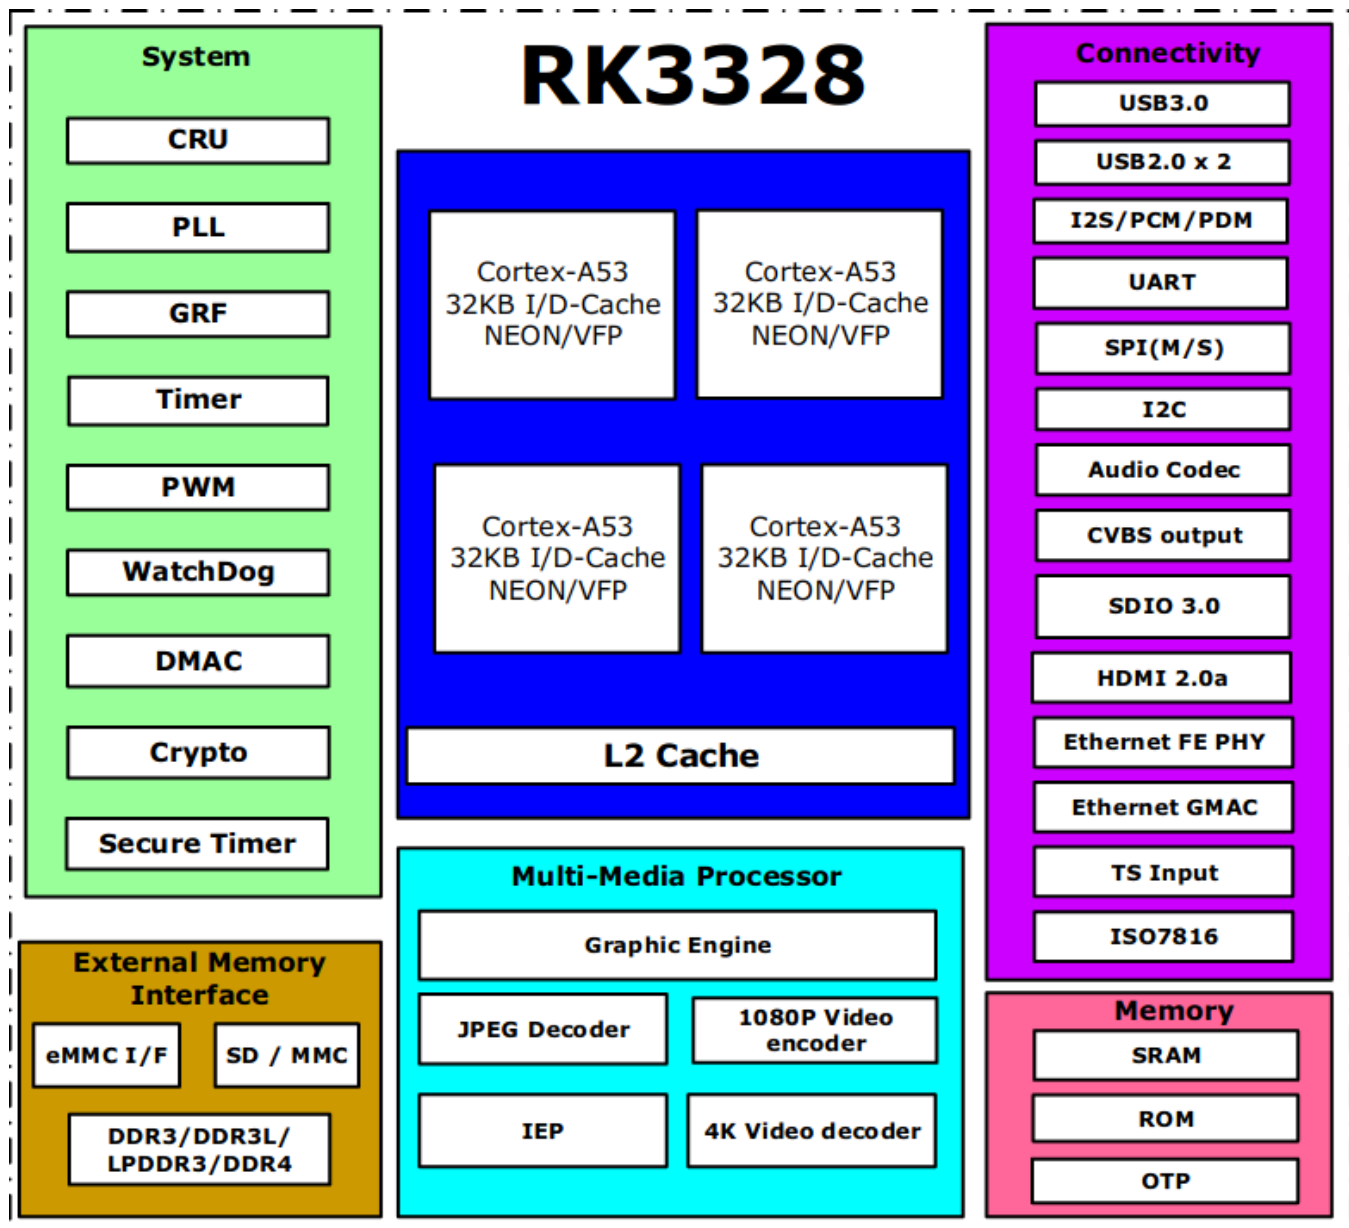

The system on modules are produced in commercial 0-70C temperature.

Order codes

[RK3328-SOM-EVB](#)

commercial grade 0-70C. Note that this board do not include SOM module, so you have to purchase separately [RK3328-SOM-1G](#) or [RK3328-SOM-2G](#)

RK3328-SOM-EVB Features

- Connectors for RK3328-SOM
- USB-Host
- USB-OTG
- USB 3.0
- Megabit Ethernet
- Gigabit Ethernet
- Flash module connector
- HDMI
- micro SD card
- Debug UART
- UEXT connector
- EXT1 connector
- Power supply jack +5VDC
- Reset and Power buttons
- Power LED
- Operating temperature 0-70C

Software

Rockchip provides Android 7.1 and Android 8.1 SDK with sources, Debian and Ubuntu Linux distributions with all hardware accelerators working. The Linux is not mainline.

Pre-built images are hosted at:

<http://images.olimex.com/release/rk3328/>

We recommend the images to be written to SD card with minimum 16GB Class10 speed like:

<https://www.olimex.com/Products/Components/Storage/MICRO-SD-CLASS10/>

To write the images we recommend balenaEtcher:

<https://www.balena.io/etcher/>

Power supply

[RK3328-SOM-EVB](#) requires +5V, 1A to operate.

Do not apply more than 5V as this would damage the [RK3328-SOM-EVB](#) and RK3328-SOM.

Power consumption is:

- around 0.4A during boot and idle
- around 0.6A when working at full speed
- around 0.8A at stress

Hardware components

SOC

RK3328 is Quad core Cortex-A53 ARM running @1.5Ghz

Memory

RK3328-SOM can have 1GB or 2GB DDR3L memory, powered with 1.35V, with 16 bit data bus width and running at 1066Mhz (533Mhz clock).

PMU

RK3328-SOM have Power Management Unit based on RK805. It allow the power voltage to SOC core, peripherals, DDR3L memory and etc to be programmable via I2C. Special driver in Linux take care for the different power modes.

USB

One USB 3.0 and two High Speed USB 2.0 Host and OTG

Display

HDMI output 1080p Full HD resolution.


Audio

Build in Stereo Audio codec.

Connectors


EXT1

EXT1 is 26 pin 0.1 inch (2.54 mm) step connector with 2x ADC, VDAC, Audio Codec, UART1, SPDIF, IR Rx, PWM2, 11x GPIOs:

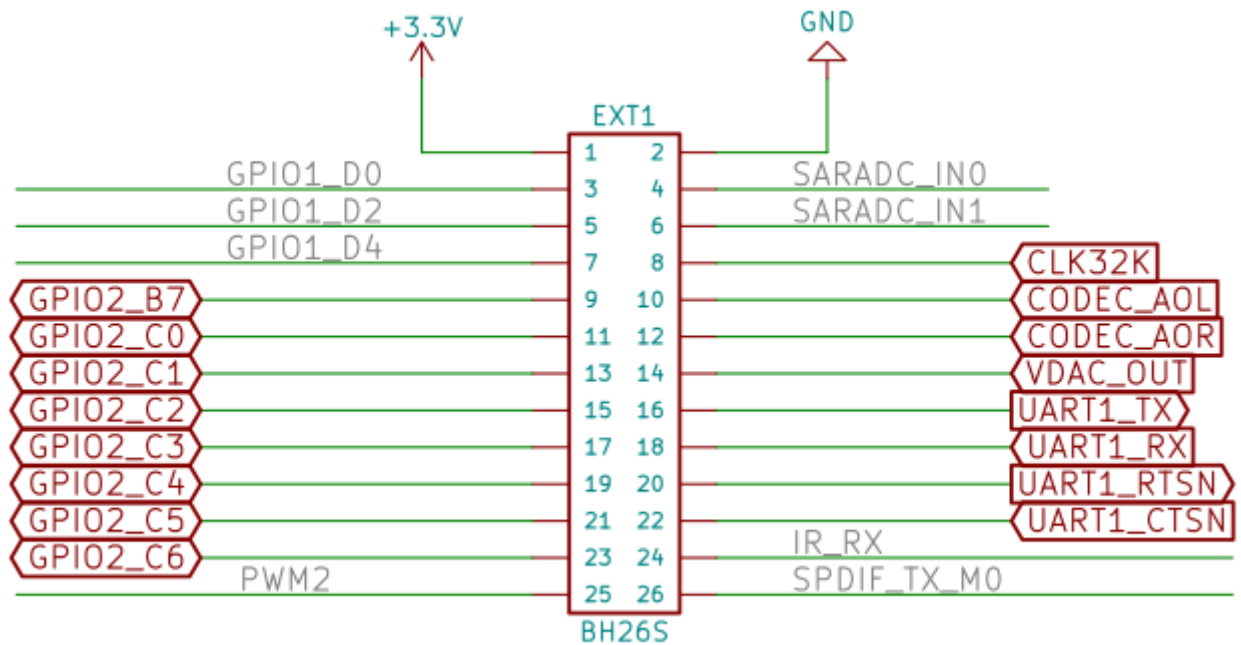

UEXT

UEXT is universal connector where different modules can be connected: interfaces, adaptors, sensors, relays, RFID, RTC etc. You can see all them on [Olimex web page](http://www.olimex.com):

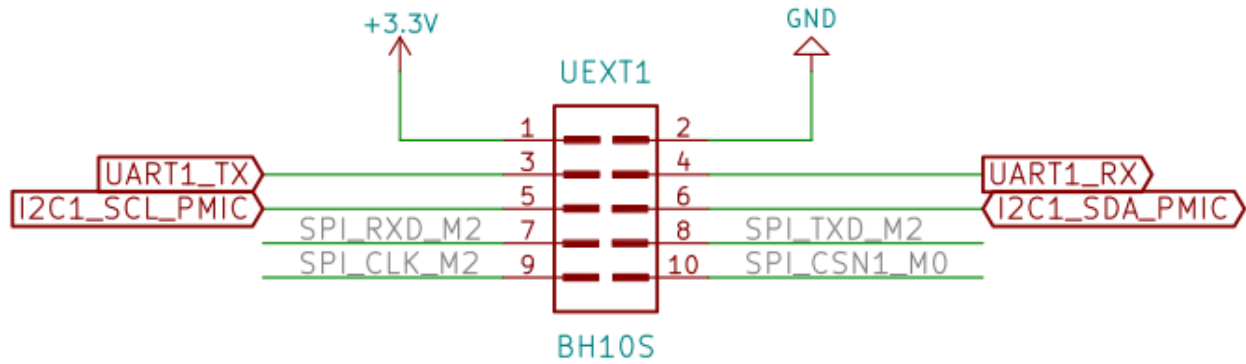

Open Source Hardware design

[RK3328-SOM-EVB](#) is open source hardware, this means that all CAD sources are available to be learn, study, modify, distribute, make, and sell the design or hardware based on that design.

The board is designed using KiCad.

[KiCad](#) is open source software and completely free to download and use.

All files are available on [GitHub](#).

Revision History

Revision 1.0 May 2021

Contact information

Headquarters and Factory address:

OLIMEX Ltd

ul. Pravda 2

Plovdiv 4000

BULGARIA

Sales: sales@olimex.com

Technical Support: support@olimex.com

Corporate Website: www.olimex.com

For latest news and developments - follow our

- [Blog](#)
- [GitHub](#)
- [Twitter](#)
- [Facebook](#)
- [Mastodon](#)
- [Pluspora](#)
- [IRC](#)
- [flickr](#)