

Inputs: switched 1/4" L/R (3.5 mm aux normalled to the tips, rings normalled to GND), USB build header J7




Balanced line receivers U1 (0 dB, tip +, ring −)




HIGH / LOW stage U2 (inverting, bridged dual pots, one gang per side)



AUX (pre) and FX (post) mono averagers U3, sends

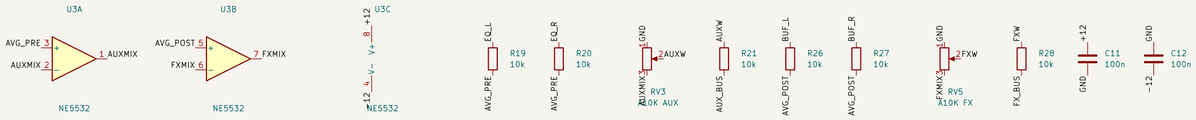

Dual fader (audio taper) and x2.5 buffers U4, balance



PEAK: two LM393 windows (+−8.2 V) on EQ_L and EQ_R, wired-OR to one LED



Power J2 (rail filters) and bus J3, same as the mono strip



Phase 4 stereo strip v1. Spec: Stuff/mixer/phase4_stereo/README.md. Built twice: line strip (jacks fitted, JP1/JP2 open) and USB-return strip (no jacks, J7 fed from the digital board, JP1/JP2 fitted). One inversion (EQ stage), same as the mono strip.

Sheet: /		
File: mixer_stereo.kicad_sch		
Title: Mixer Phase 4 – stereo strip (line / USB return)		
Size: A2	Date: 2026-10-26	**Rev: 1**
KiCad E.D.A. 10.0.7		Id: 1/1