


Mount ULN2003 with at least **(2)M2x4 Screws.**

Step 2


Due to size variations between different makes of the ULN2003 driver board, it is not necessary to screw in all 4 sides, the board will be secure with as little as one screw.

1.5mm Hex Key

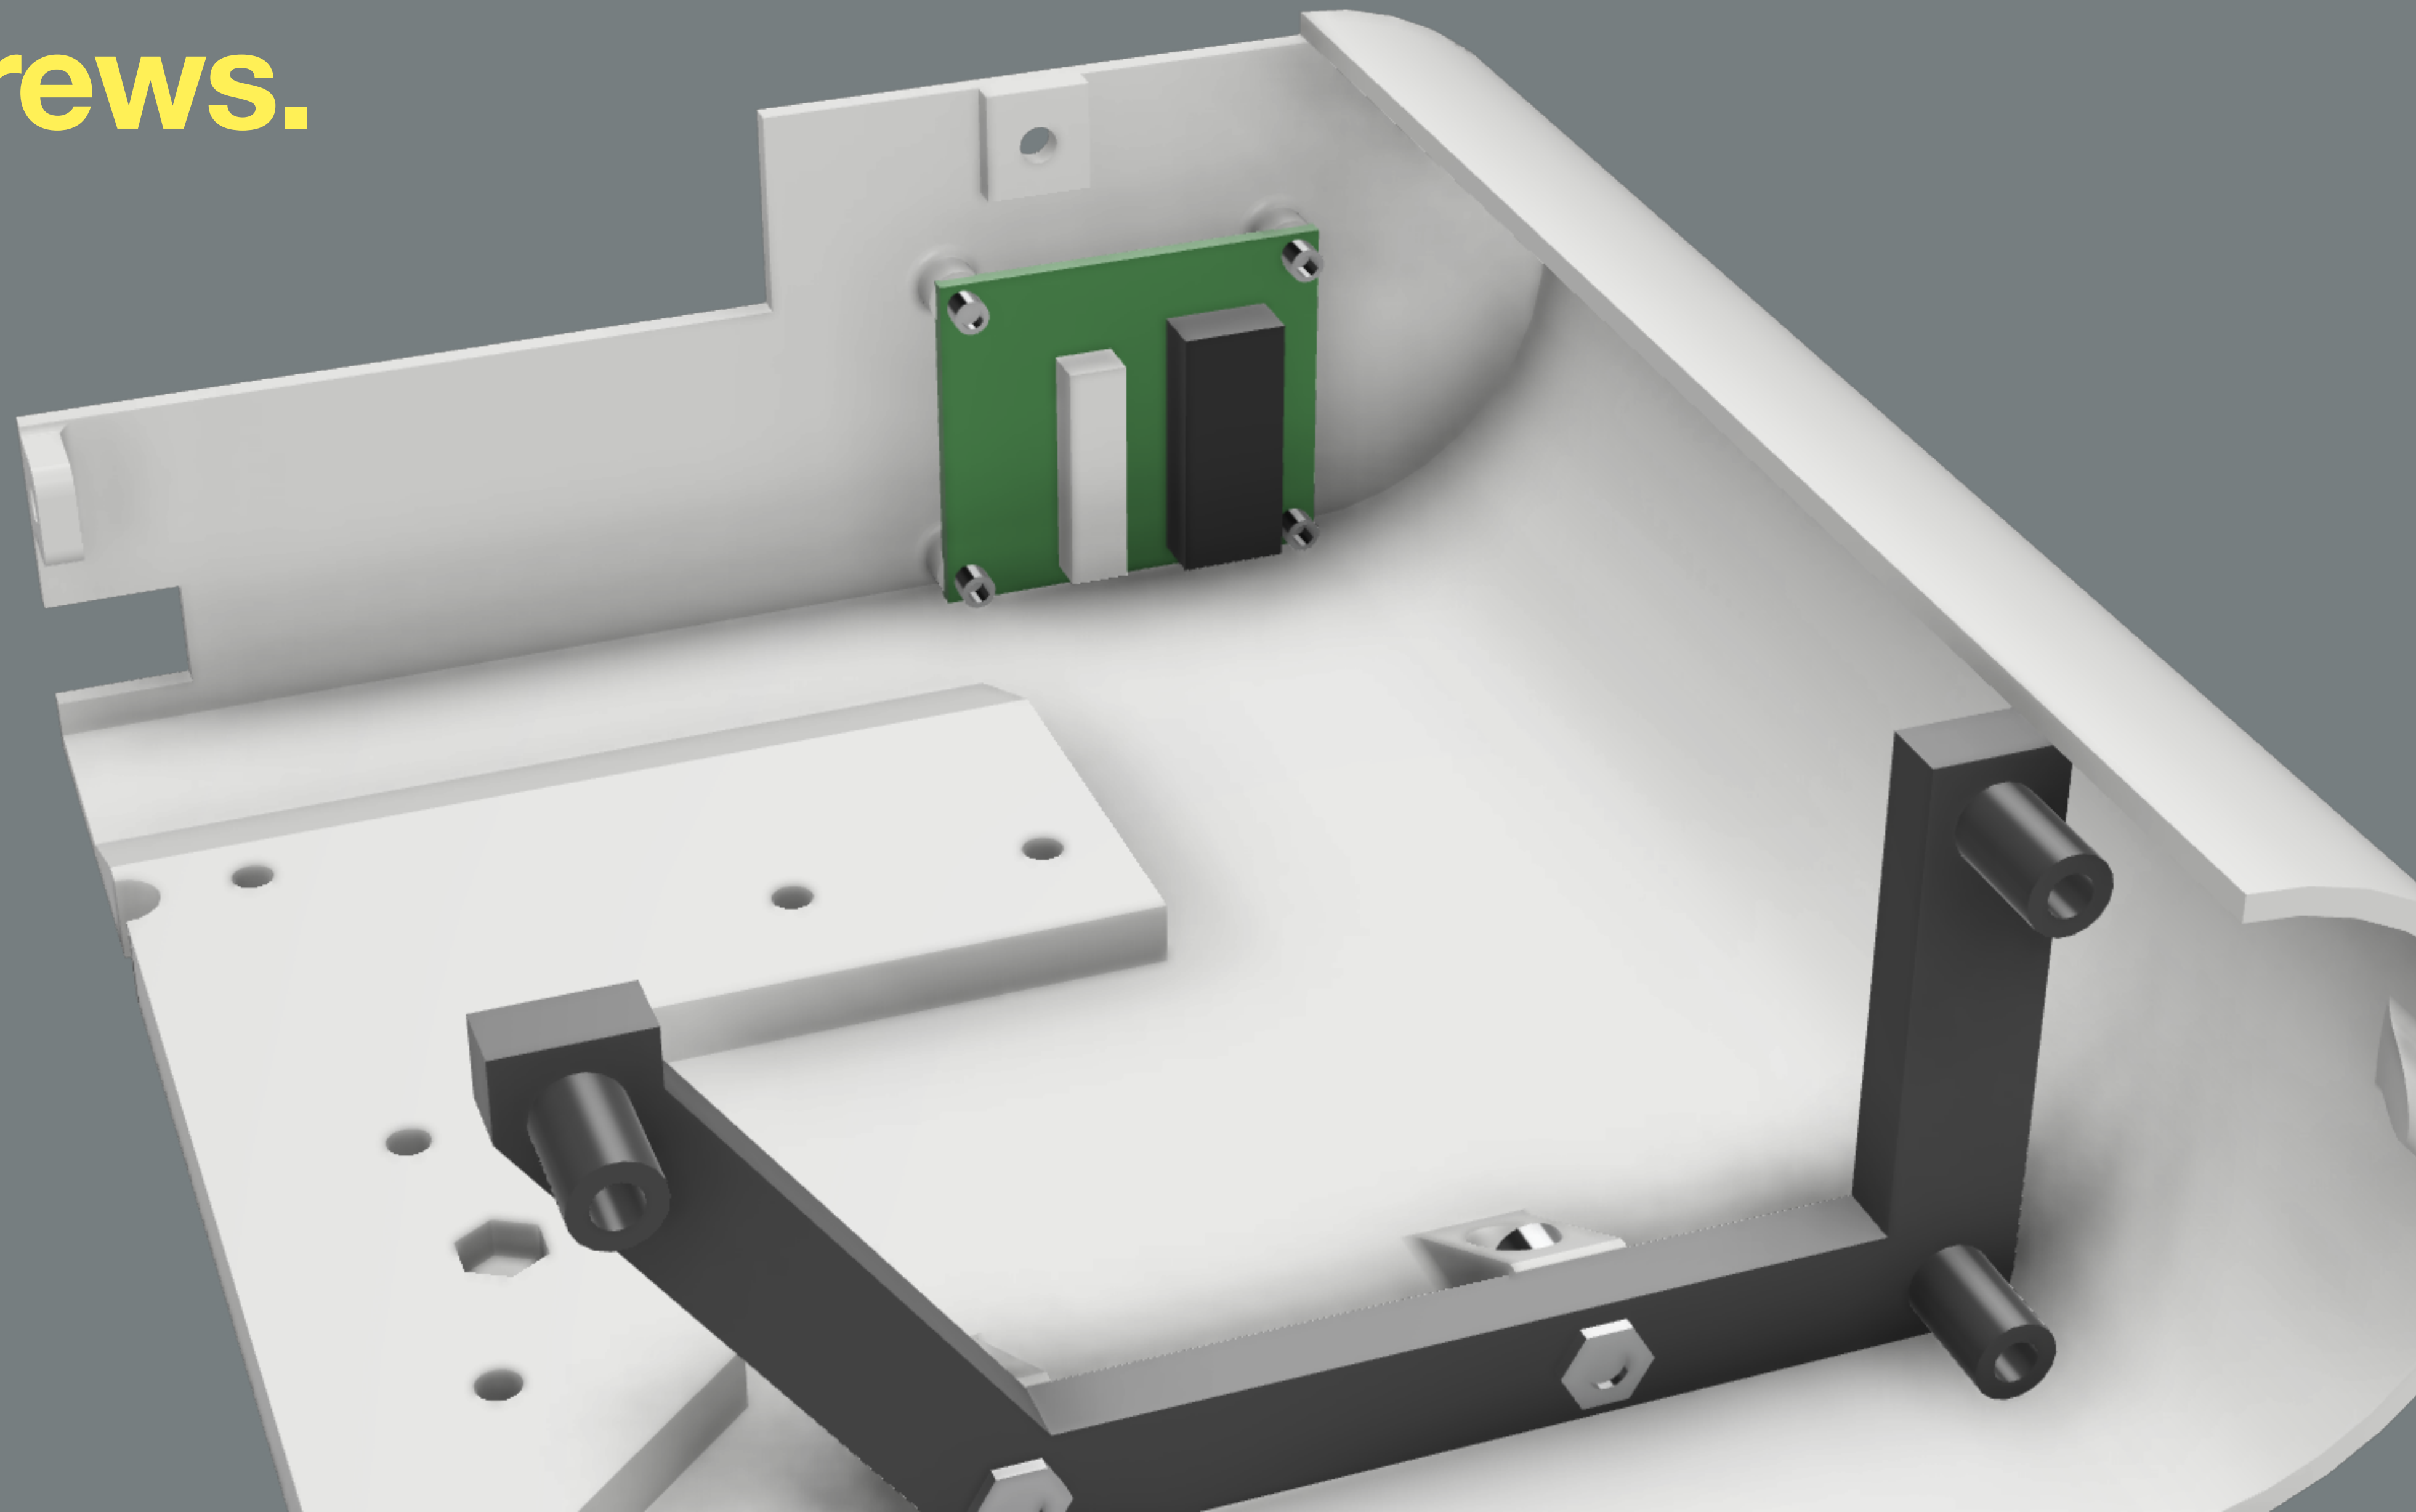

Place **(2)M3 Nuts**
into the recess on
either side case
piece.

Step 3

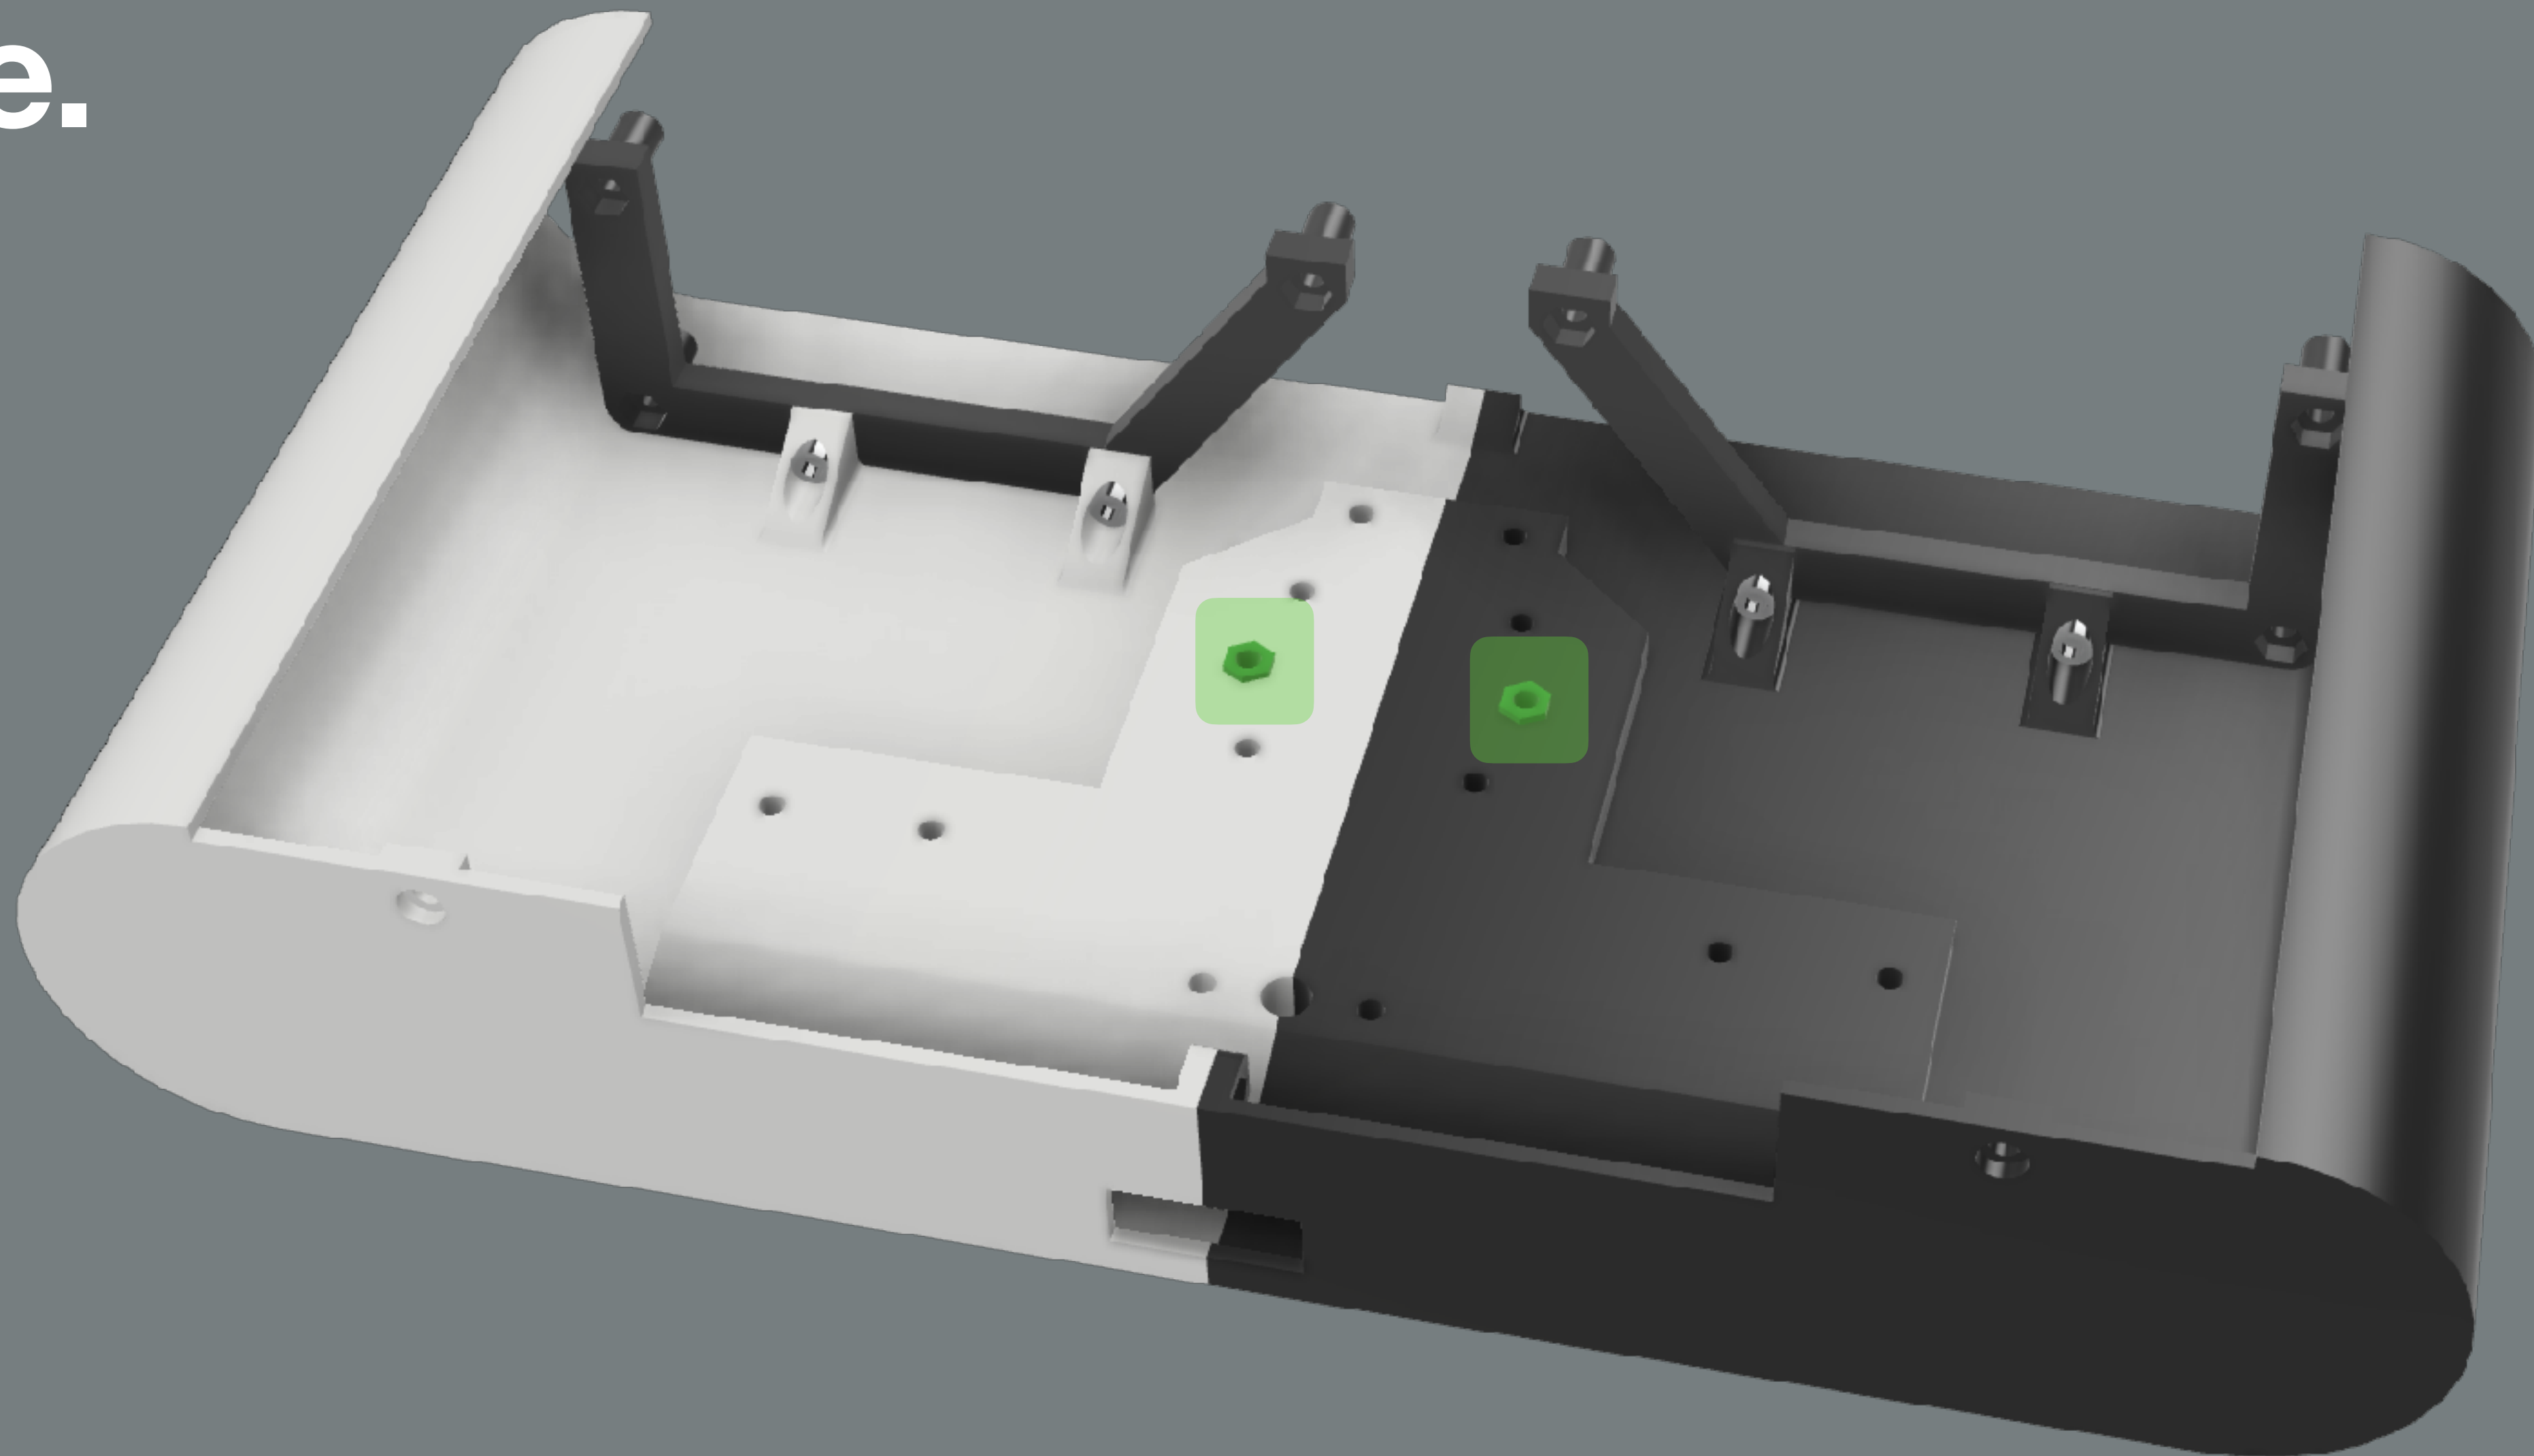

Step 4

Mount Motor
Mount using
(4)M3x8 Screws
and **(4)M3 Nuts**.
Do not fully
tighten yet.




2.5mm Hex Key



**Mount (4x)
Gearbox posts
using (8)M3x8
Screws and
(8)M3 Nuts.**

Step 5

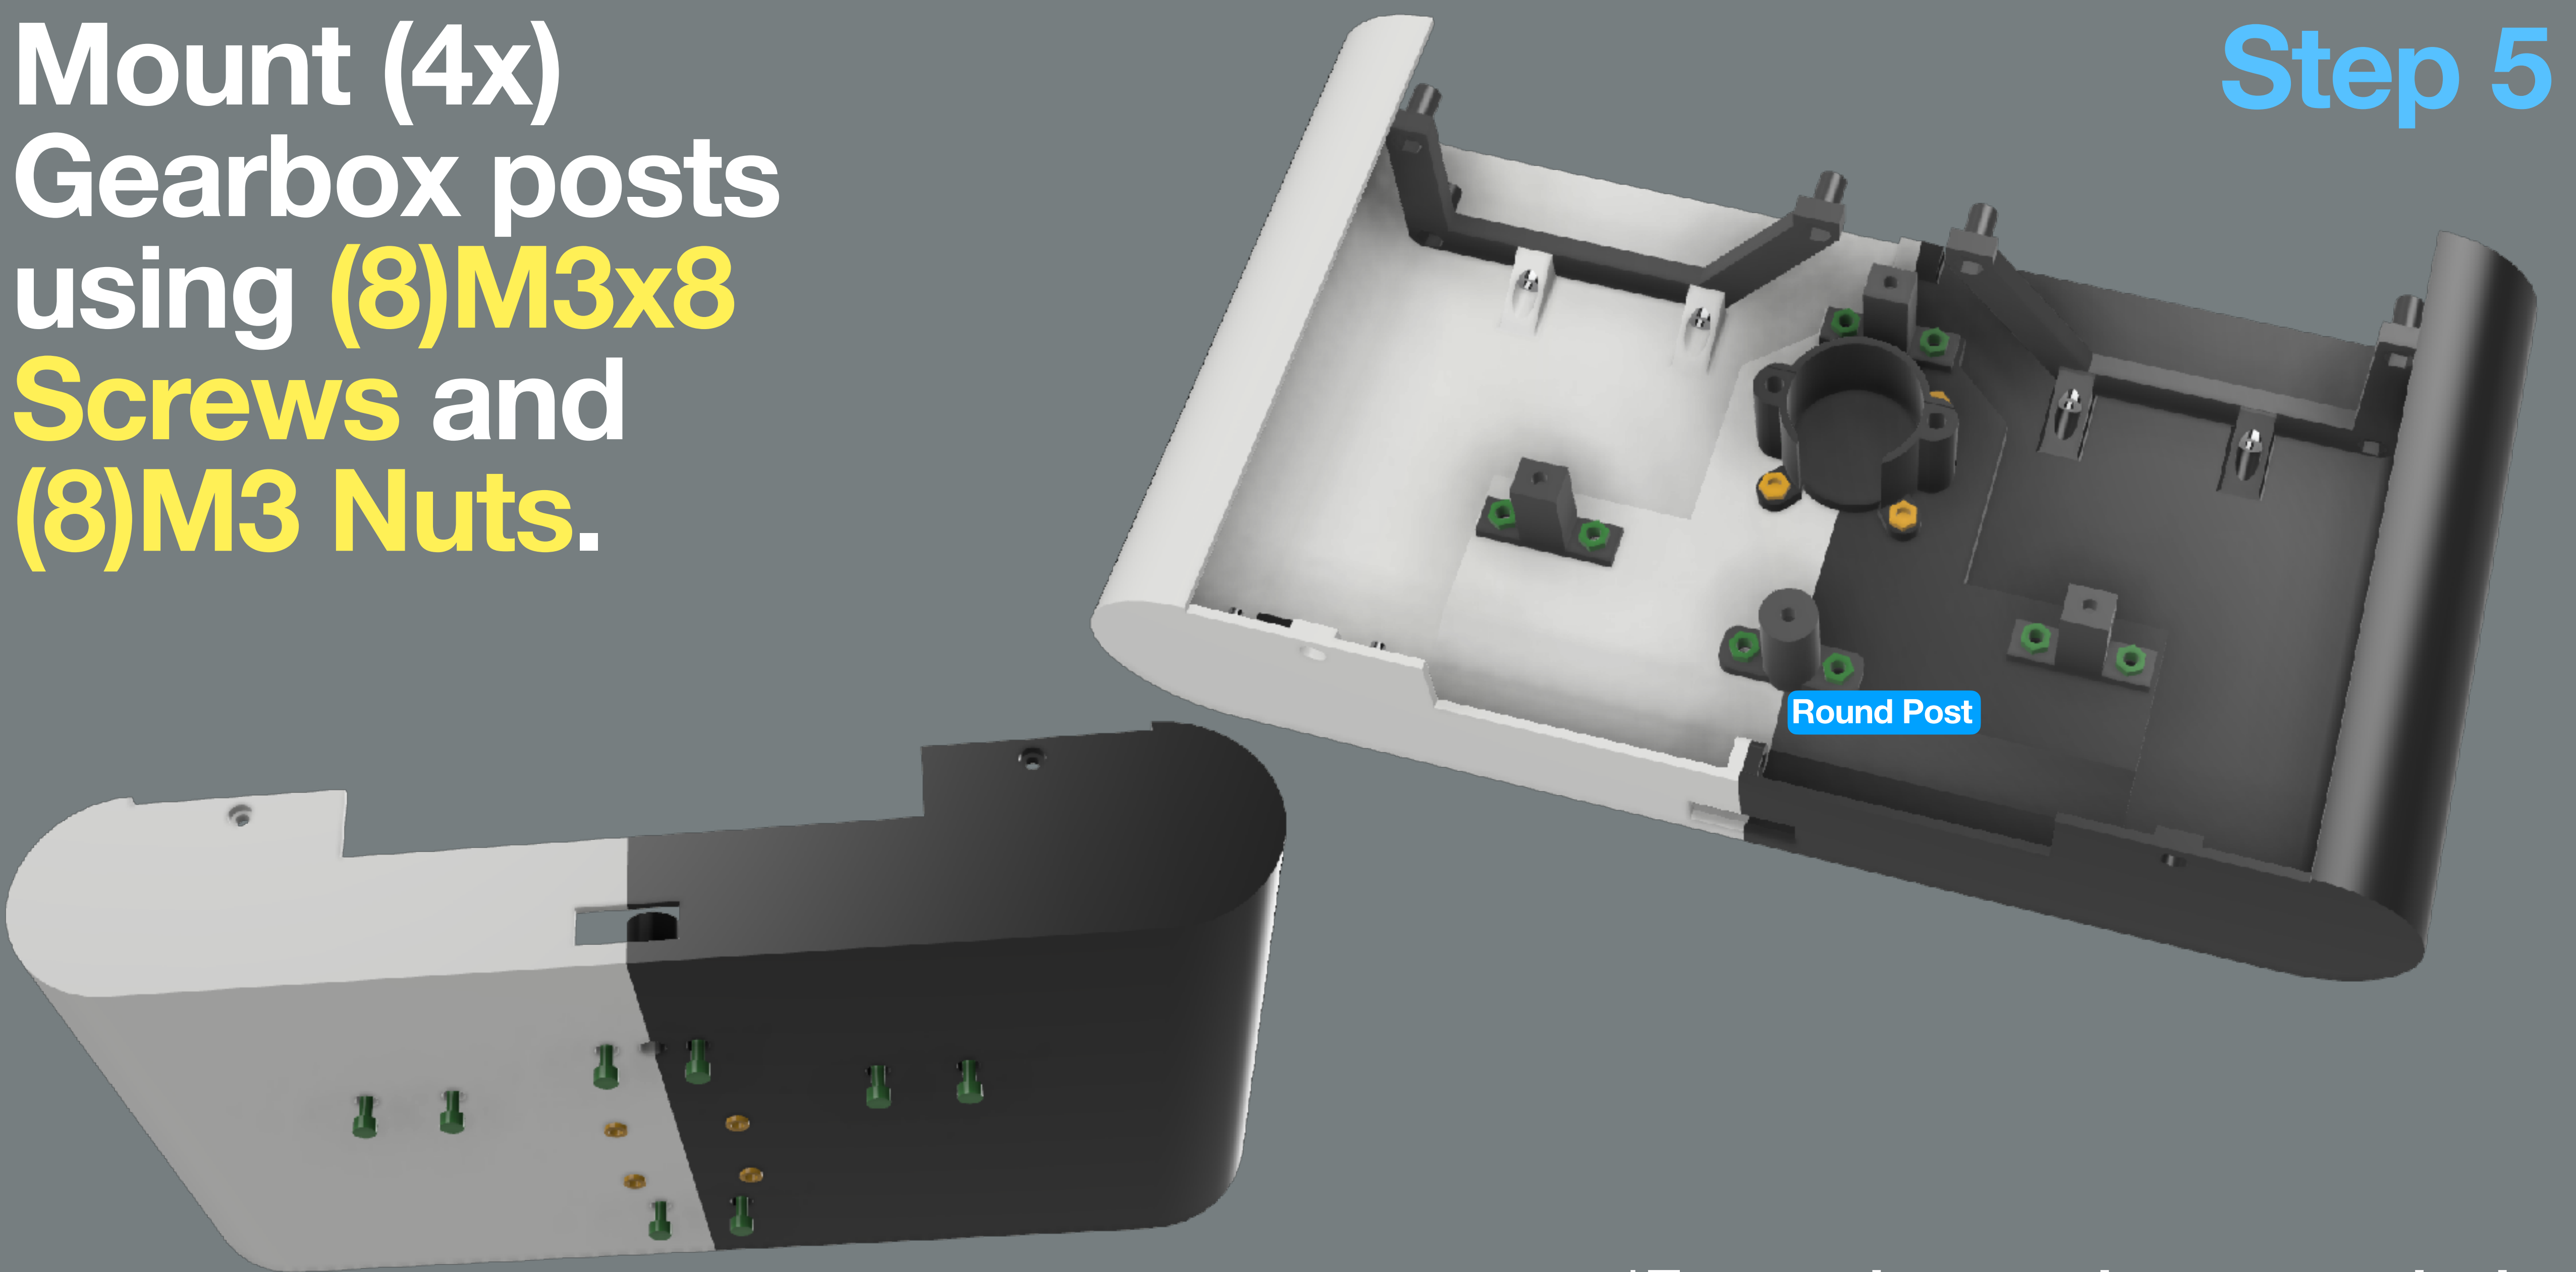


2.5mm Hex Key



***Ensure the round post goes in the rear center position of the case. Do not fully tighten yet.**


Join the rear case tabs using
(1) M3x8 Screw
and **(1) M3 Nut**. Do
not fully tighten
yet.

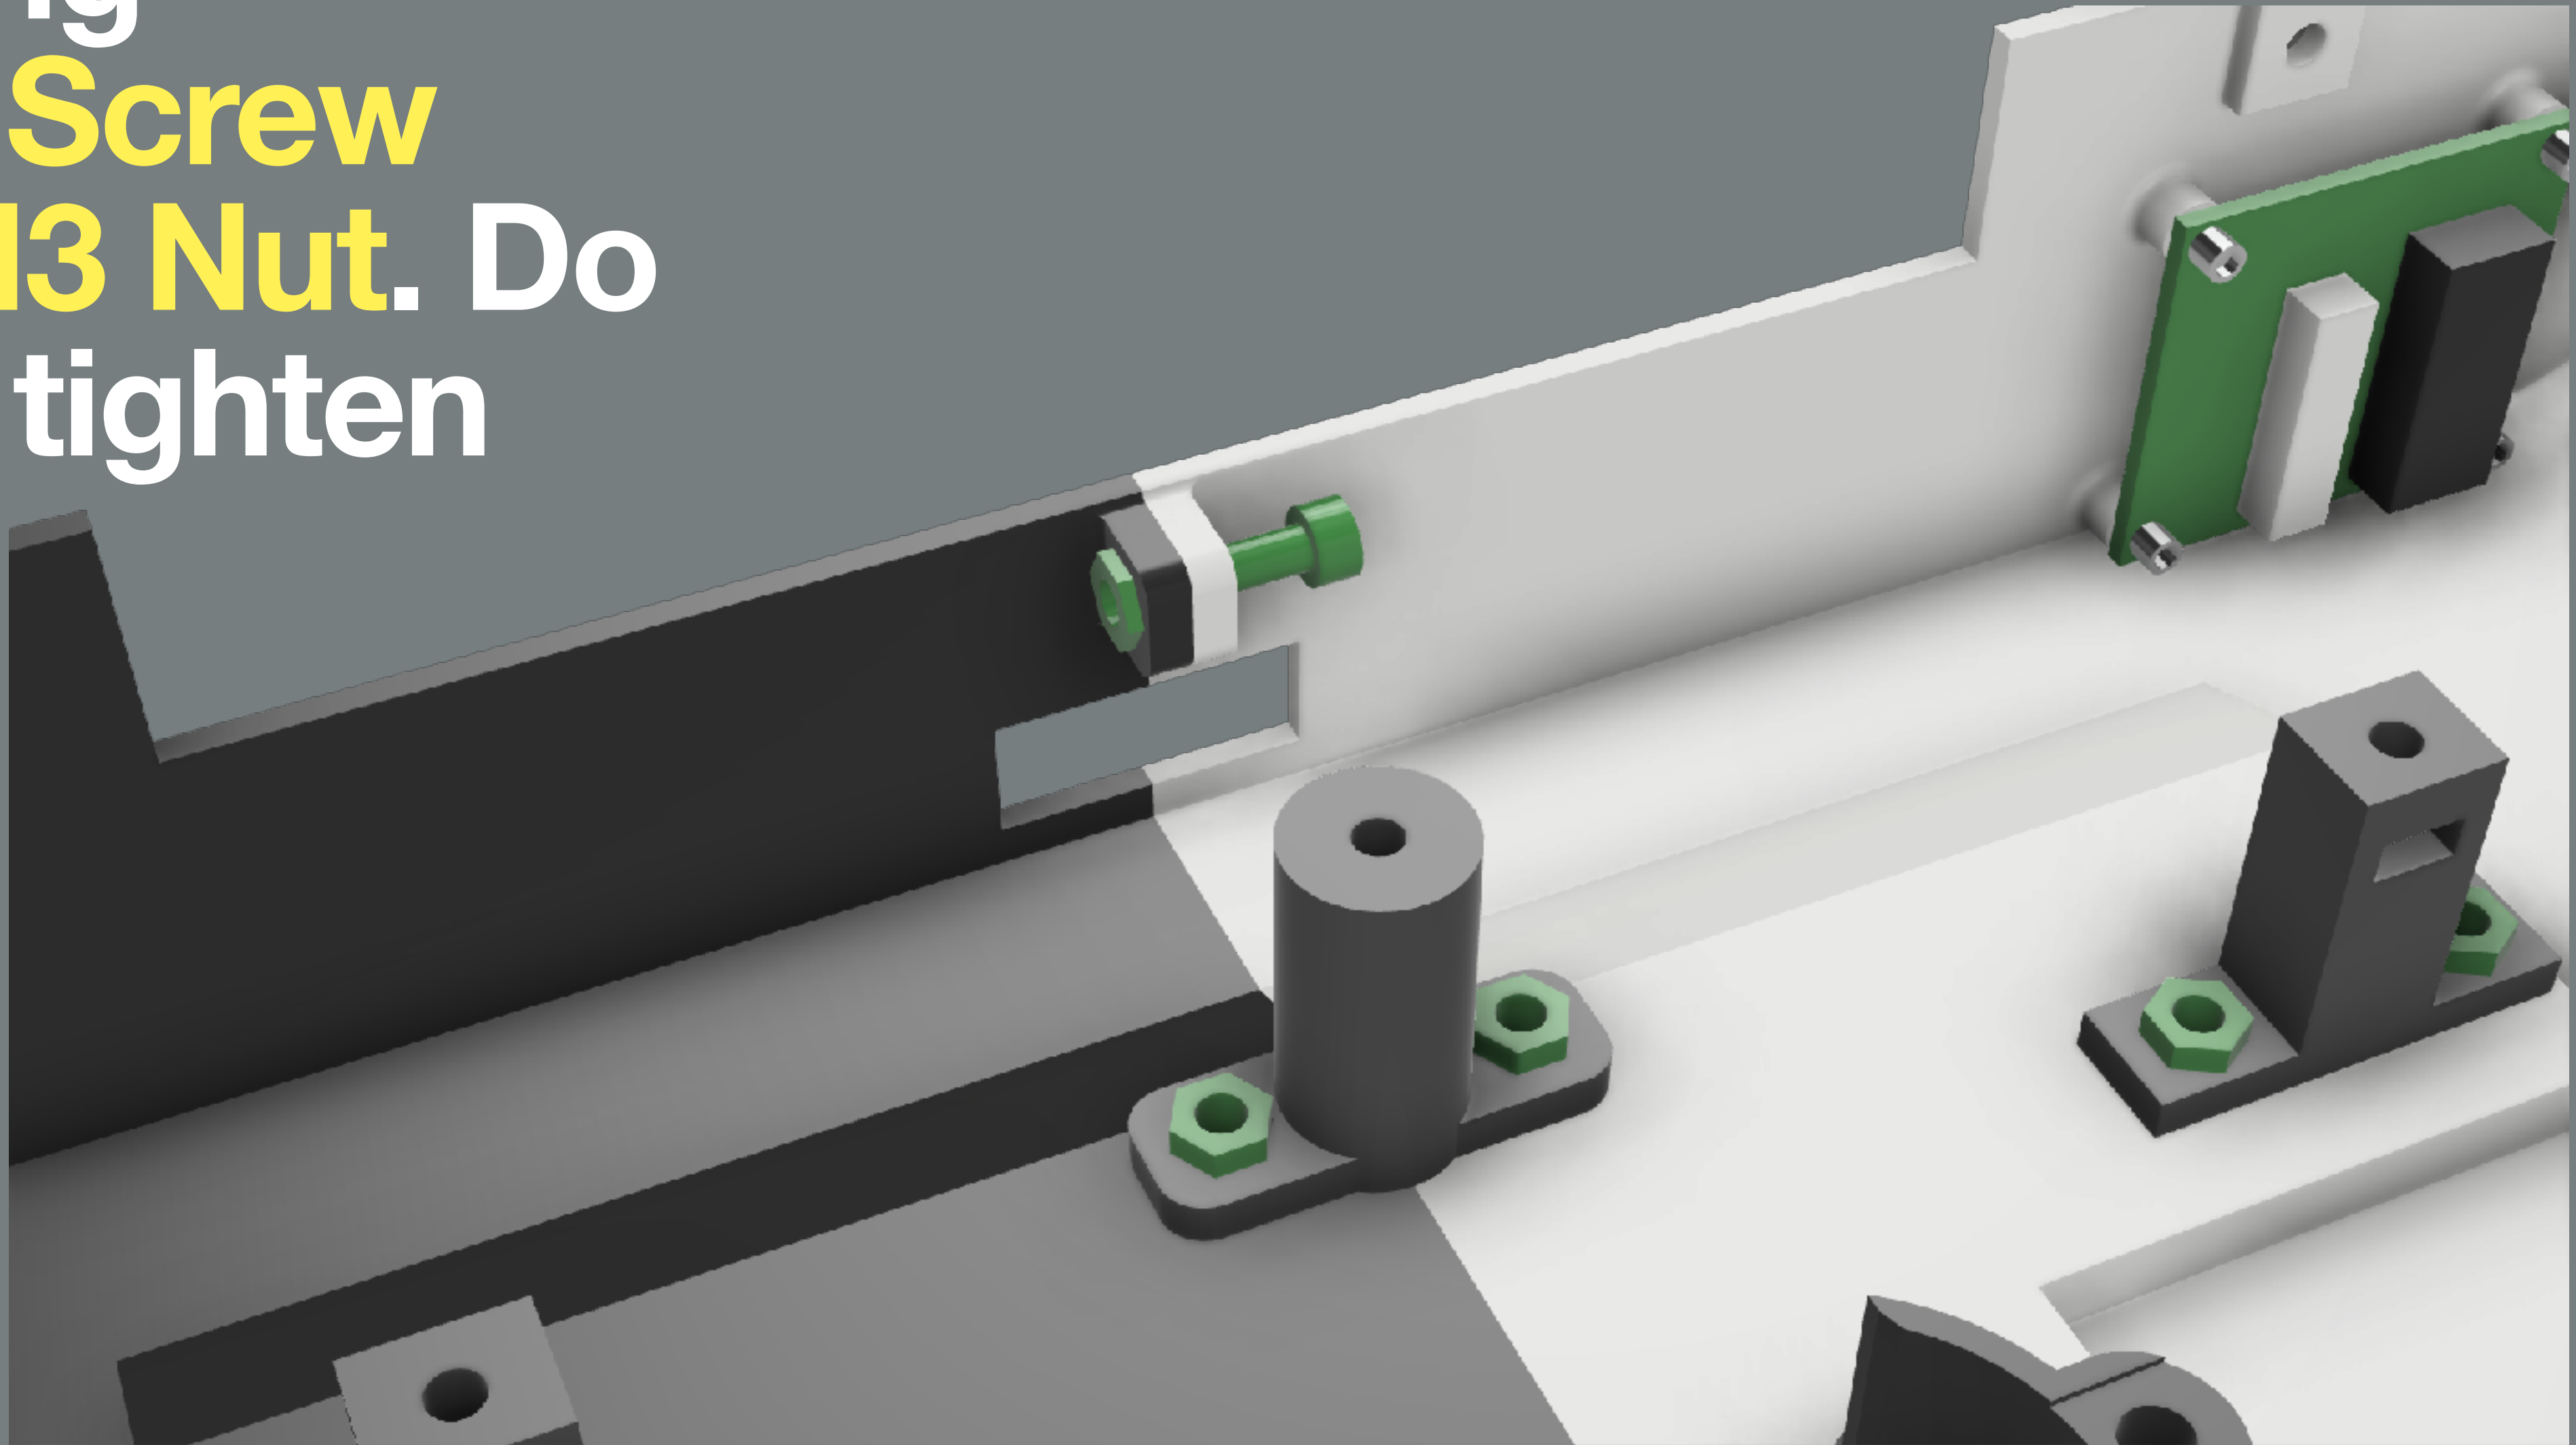

2.5mm Hex Key



Ensure the two side case pieces are aligned properly, then proceed to tighten all the Screws to securely join the two side case pieces.

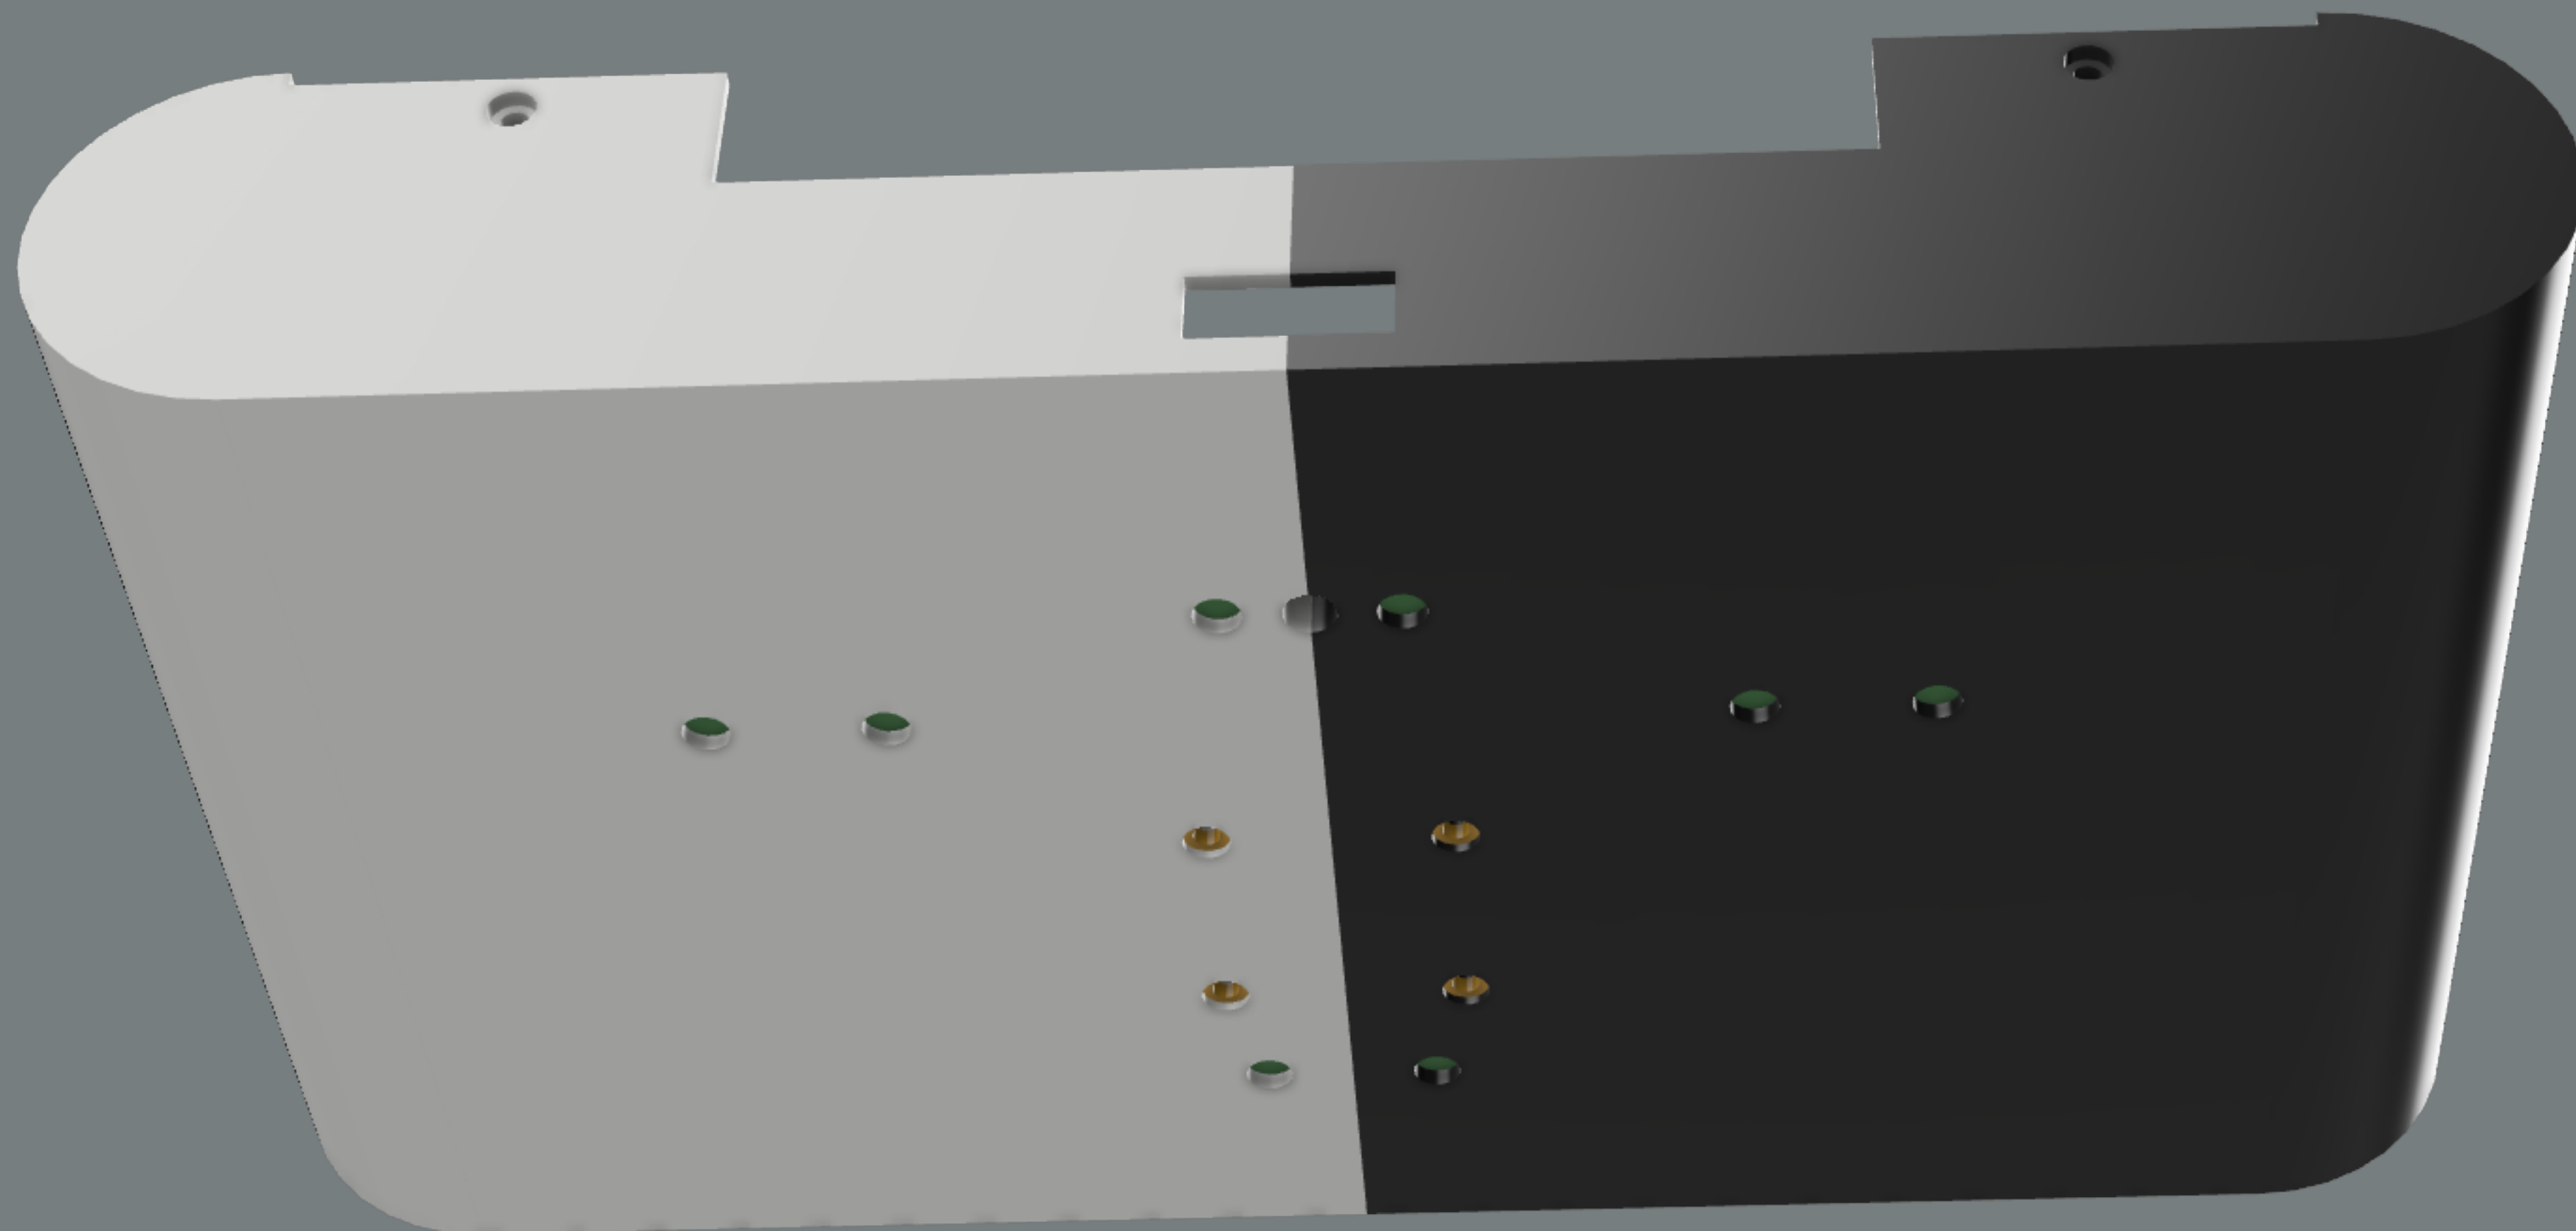


2.5mm Hex Key



Step 8


Place the Stepper Motor into the motor mount and, using **(2)M3x25 Screws** secure it to the **M3 Nuts** beneath the motor mount that were inserted in **Step 3**.

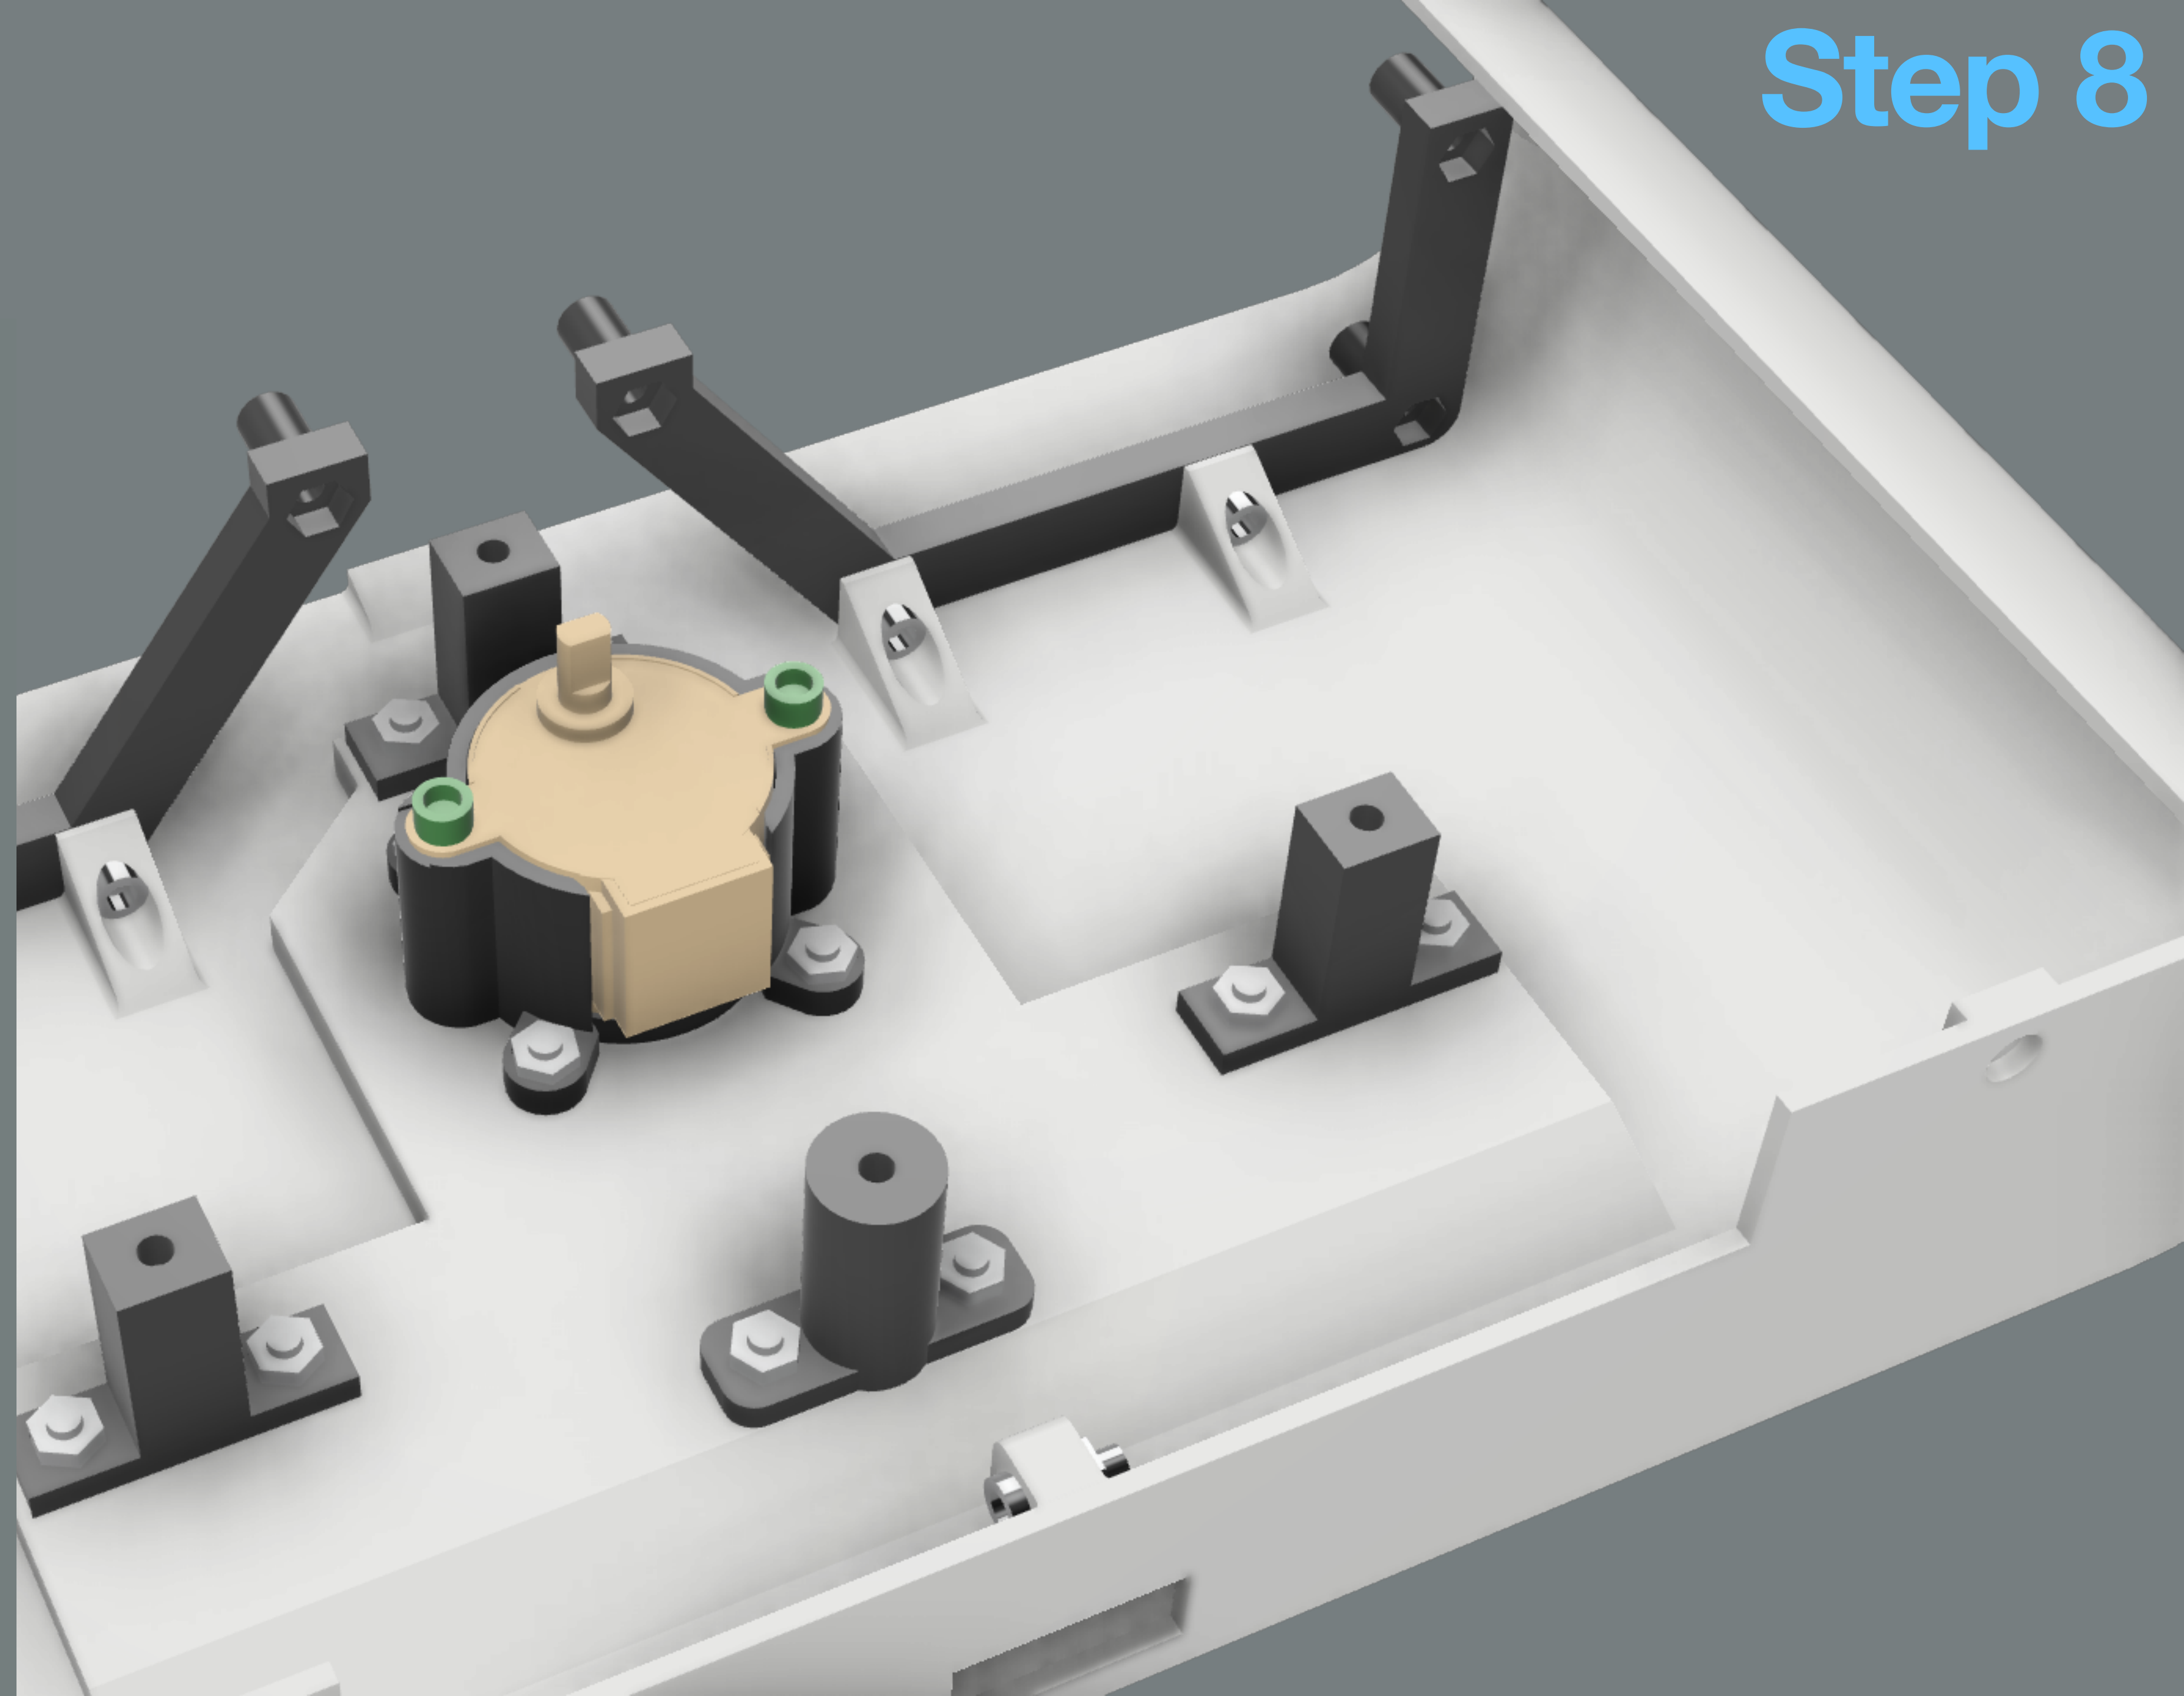

2.5mm Hex Key




Place the Gearbox Bottom onto the (4x) Gearbox posts and the motor.

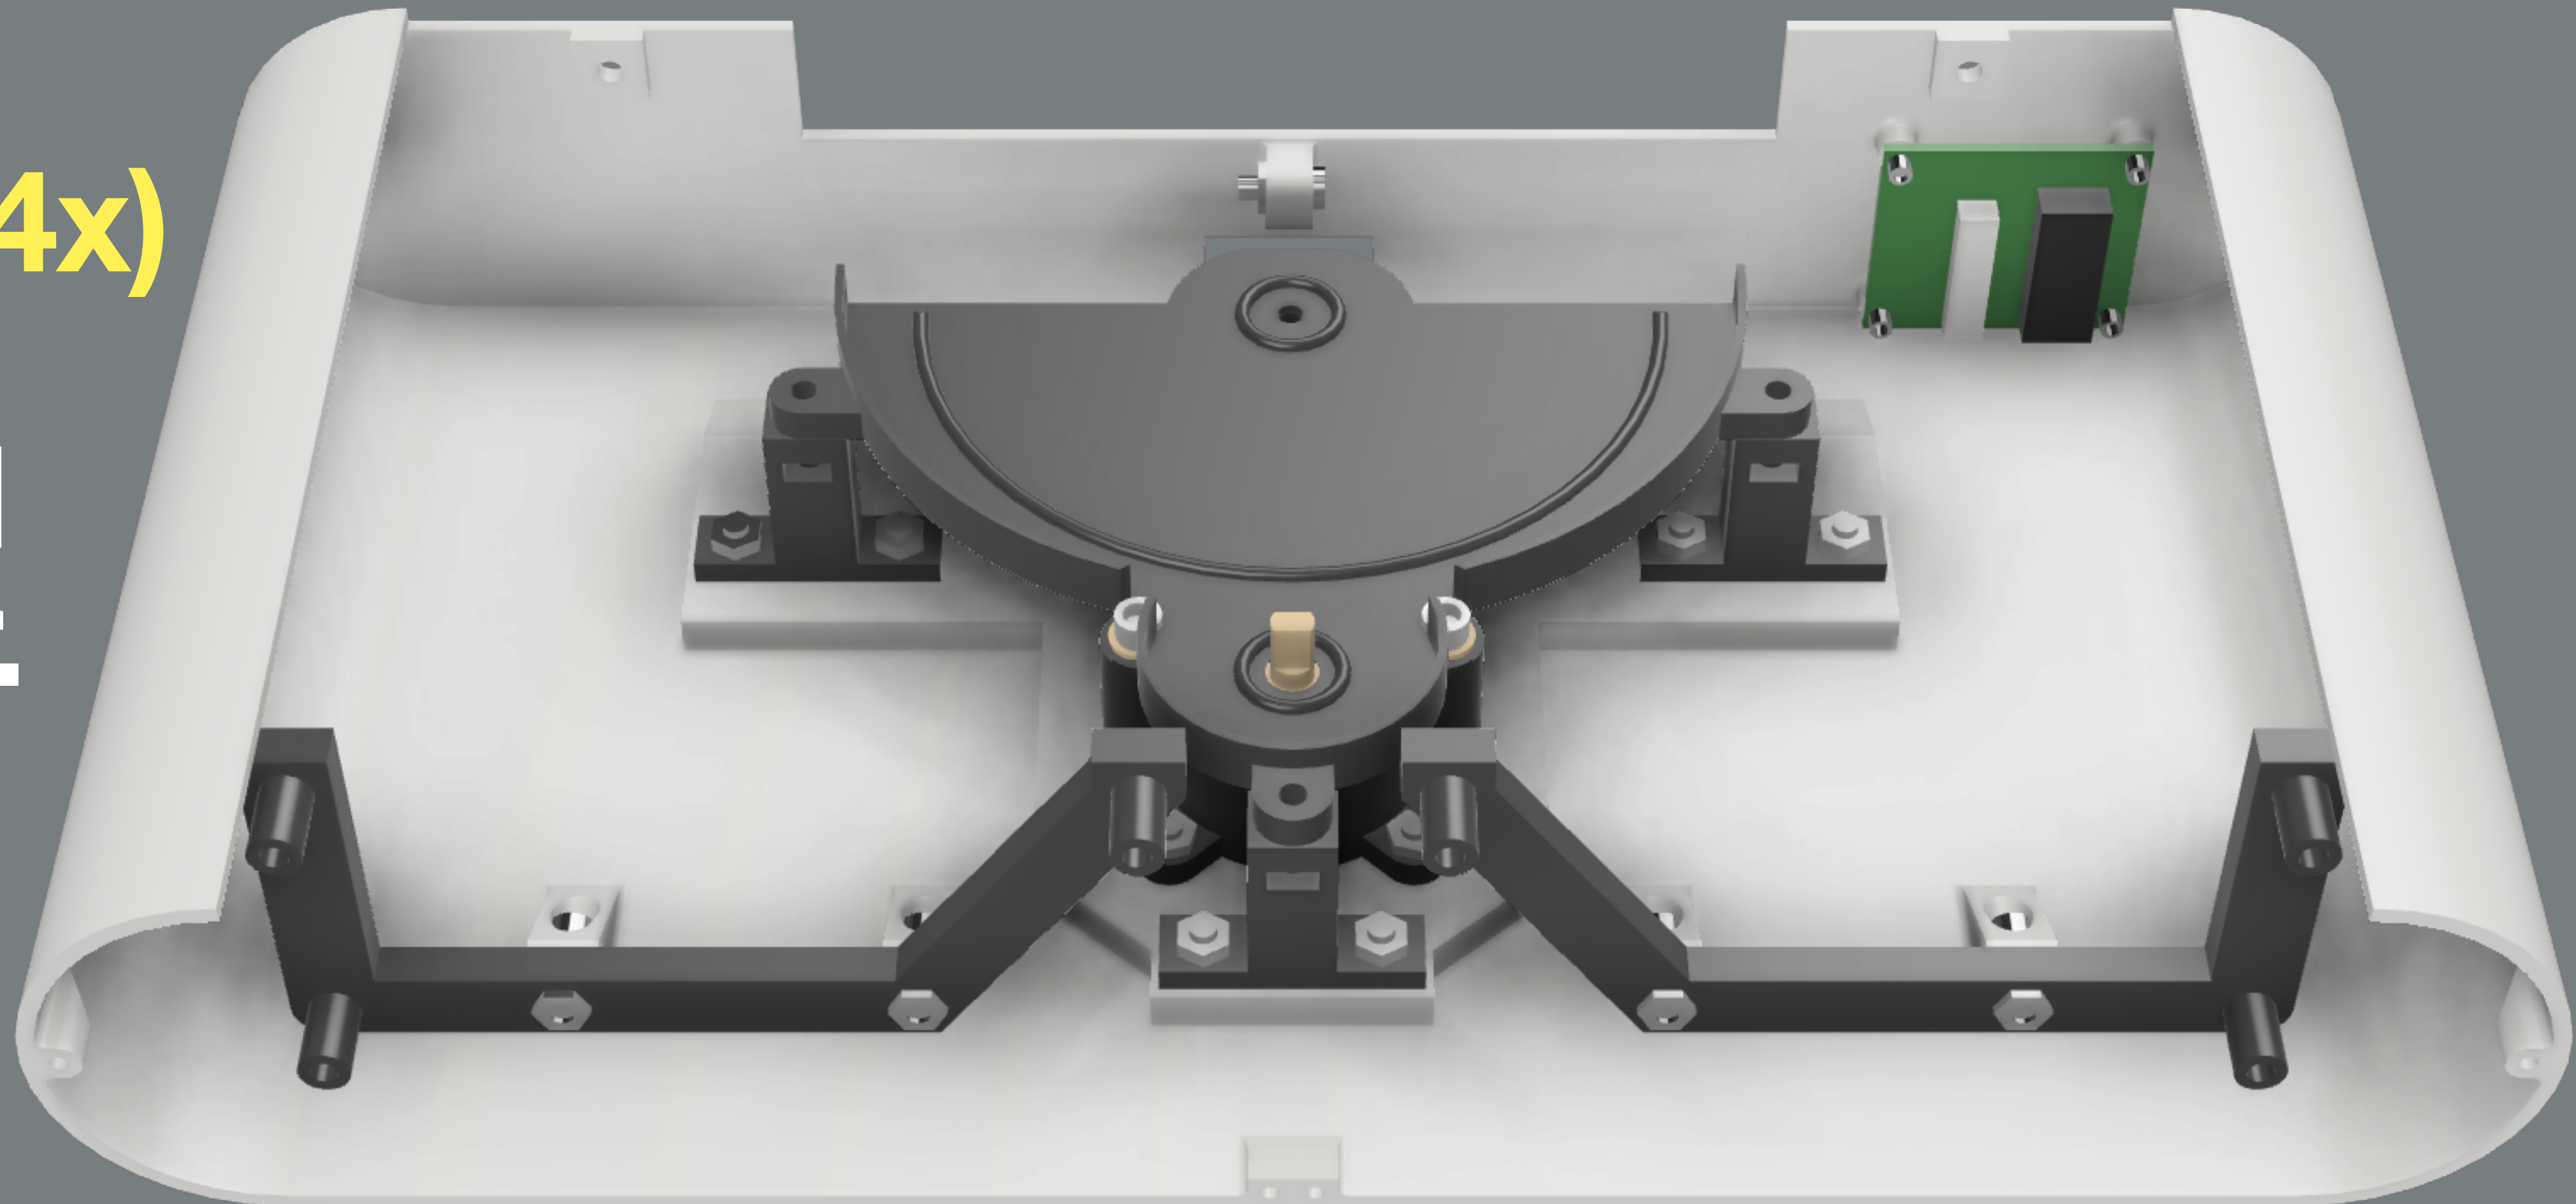


****Ensure the motor shaft properly goes through the hole above it.**

**Press the Small
Gear onto the
motor shaft.**


Step 10

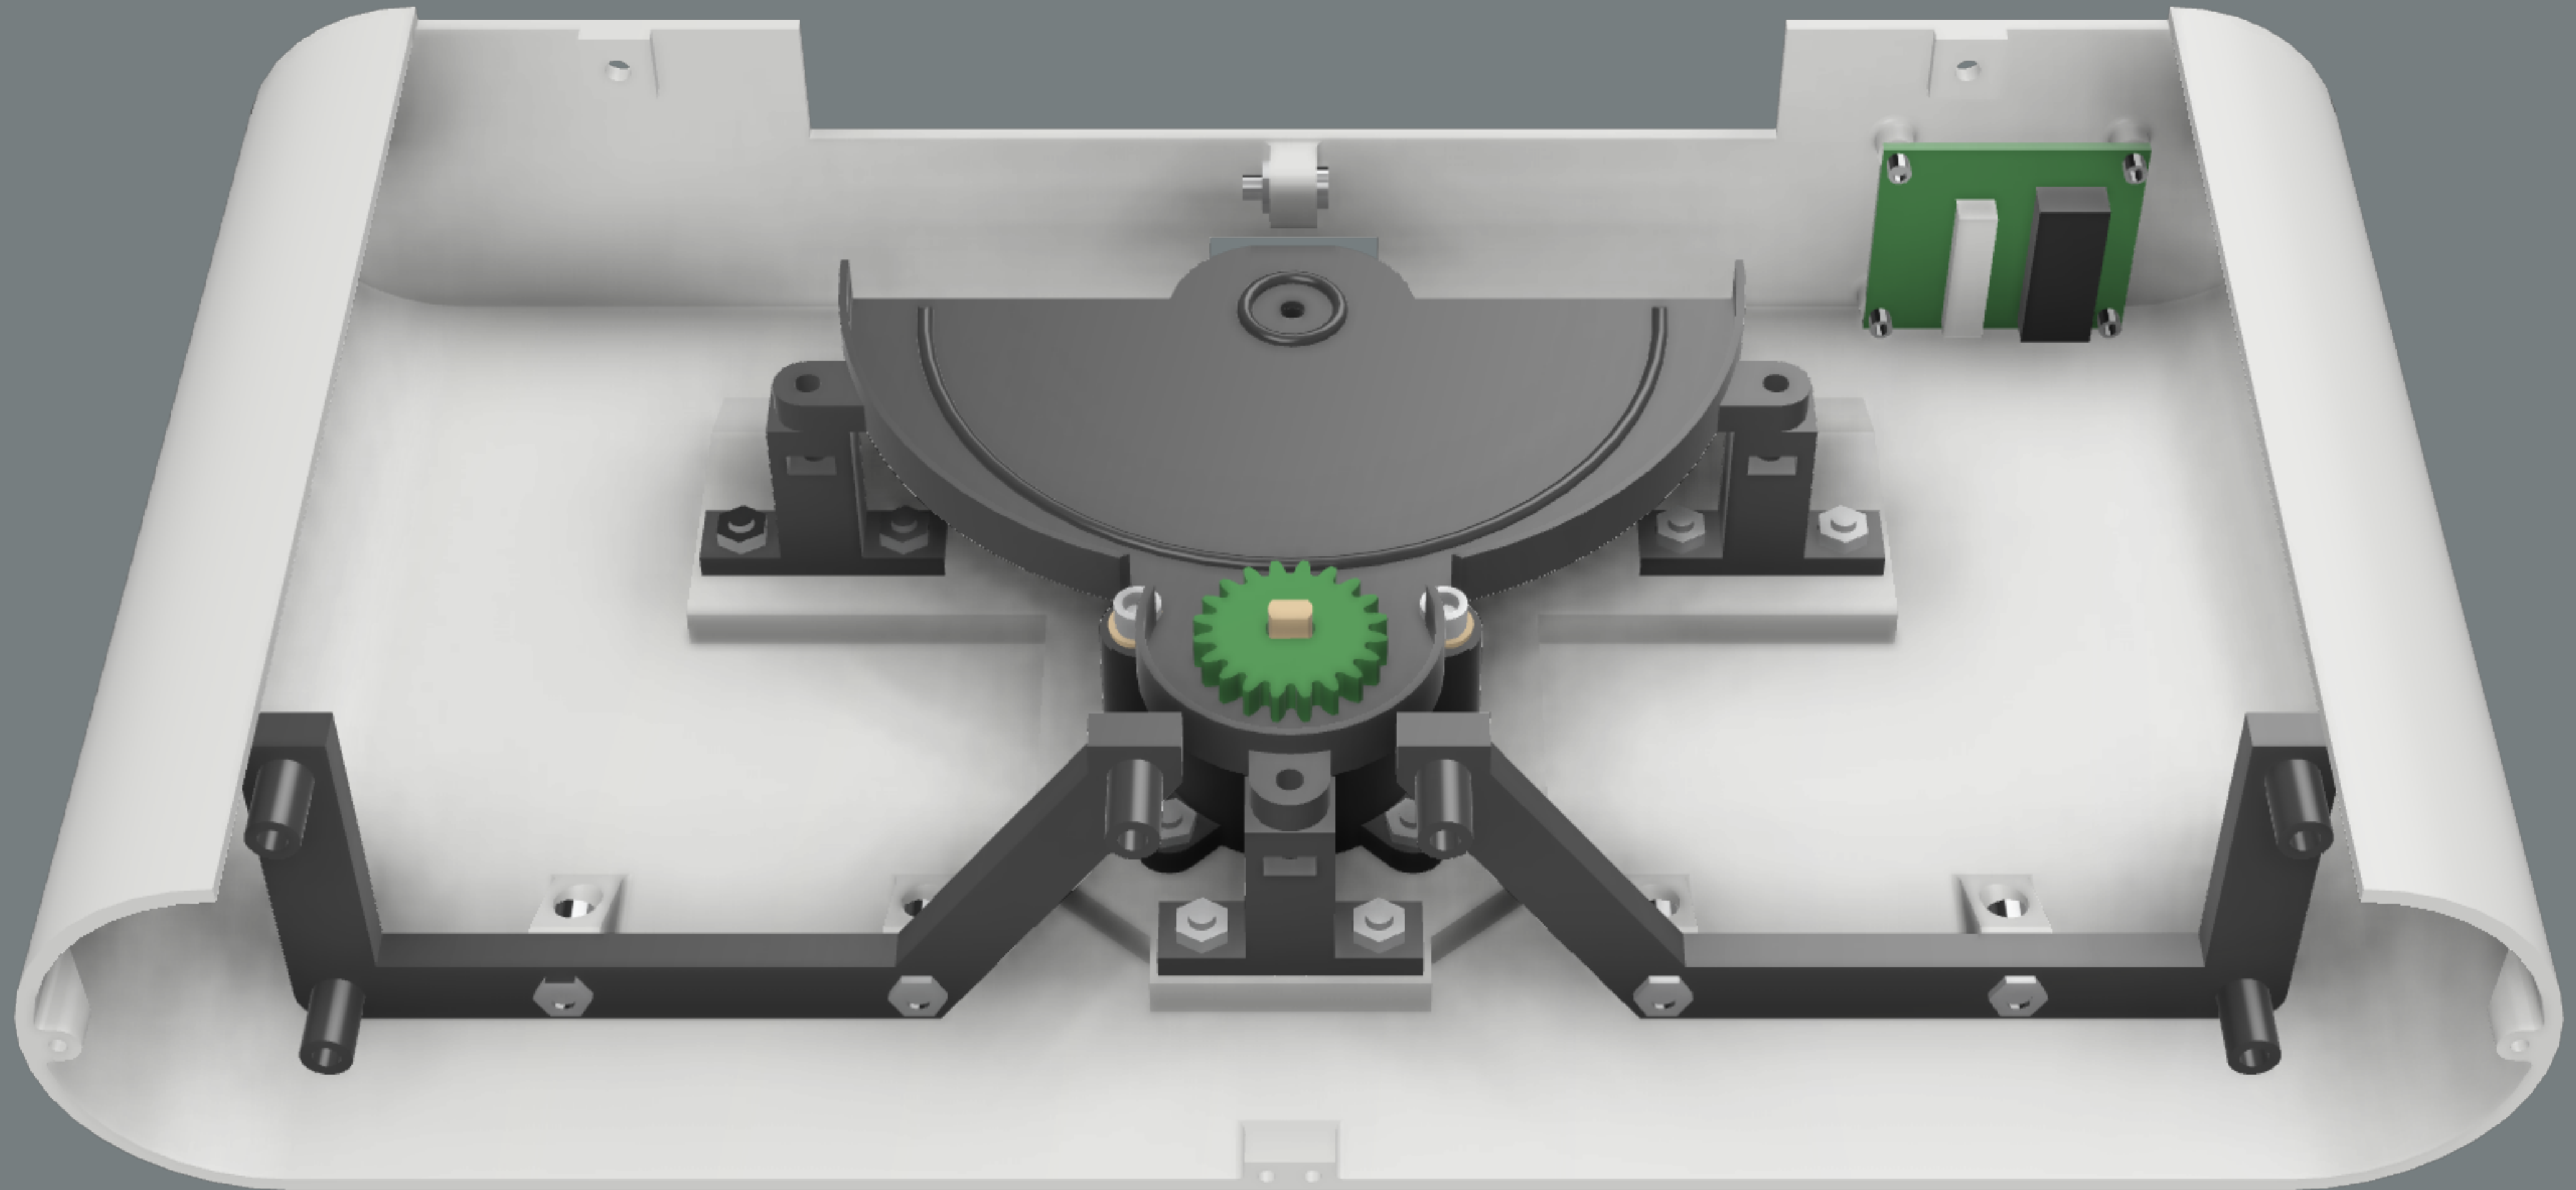

Align and place the Gearbox Top over the Gearbox Bottom and insert **(3) M3 Nuts** into the holes in the fronts of the 3x Square Gearbox Posts.

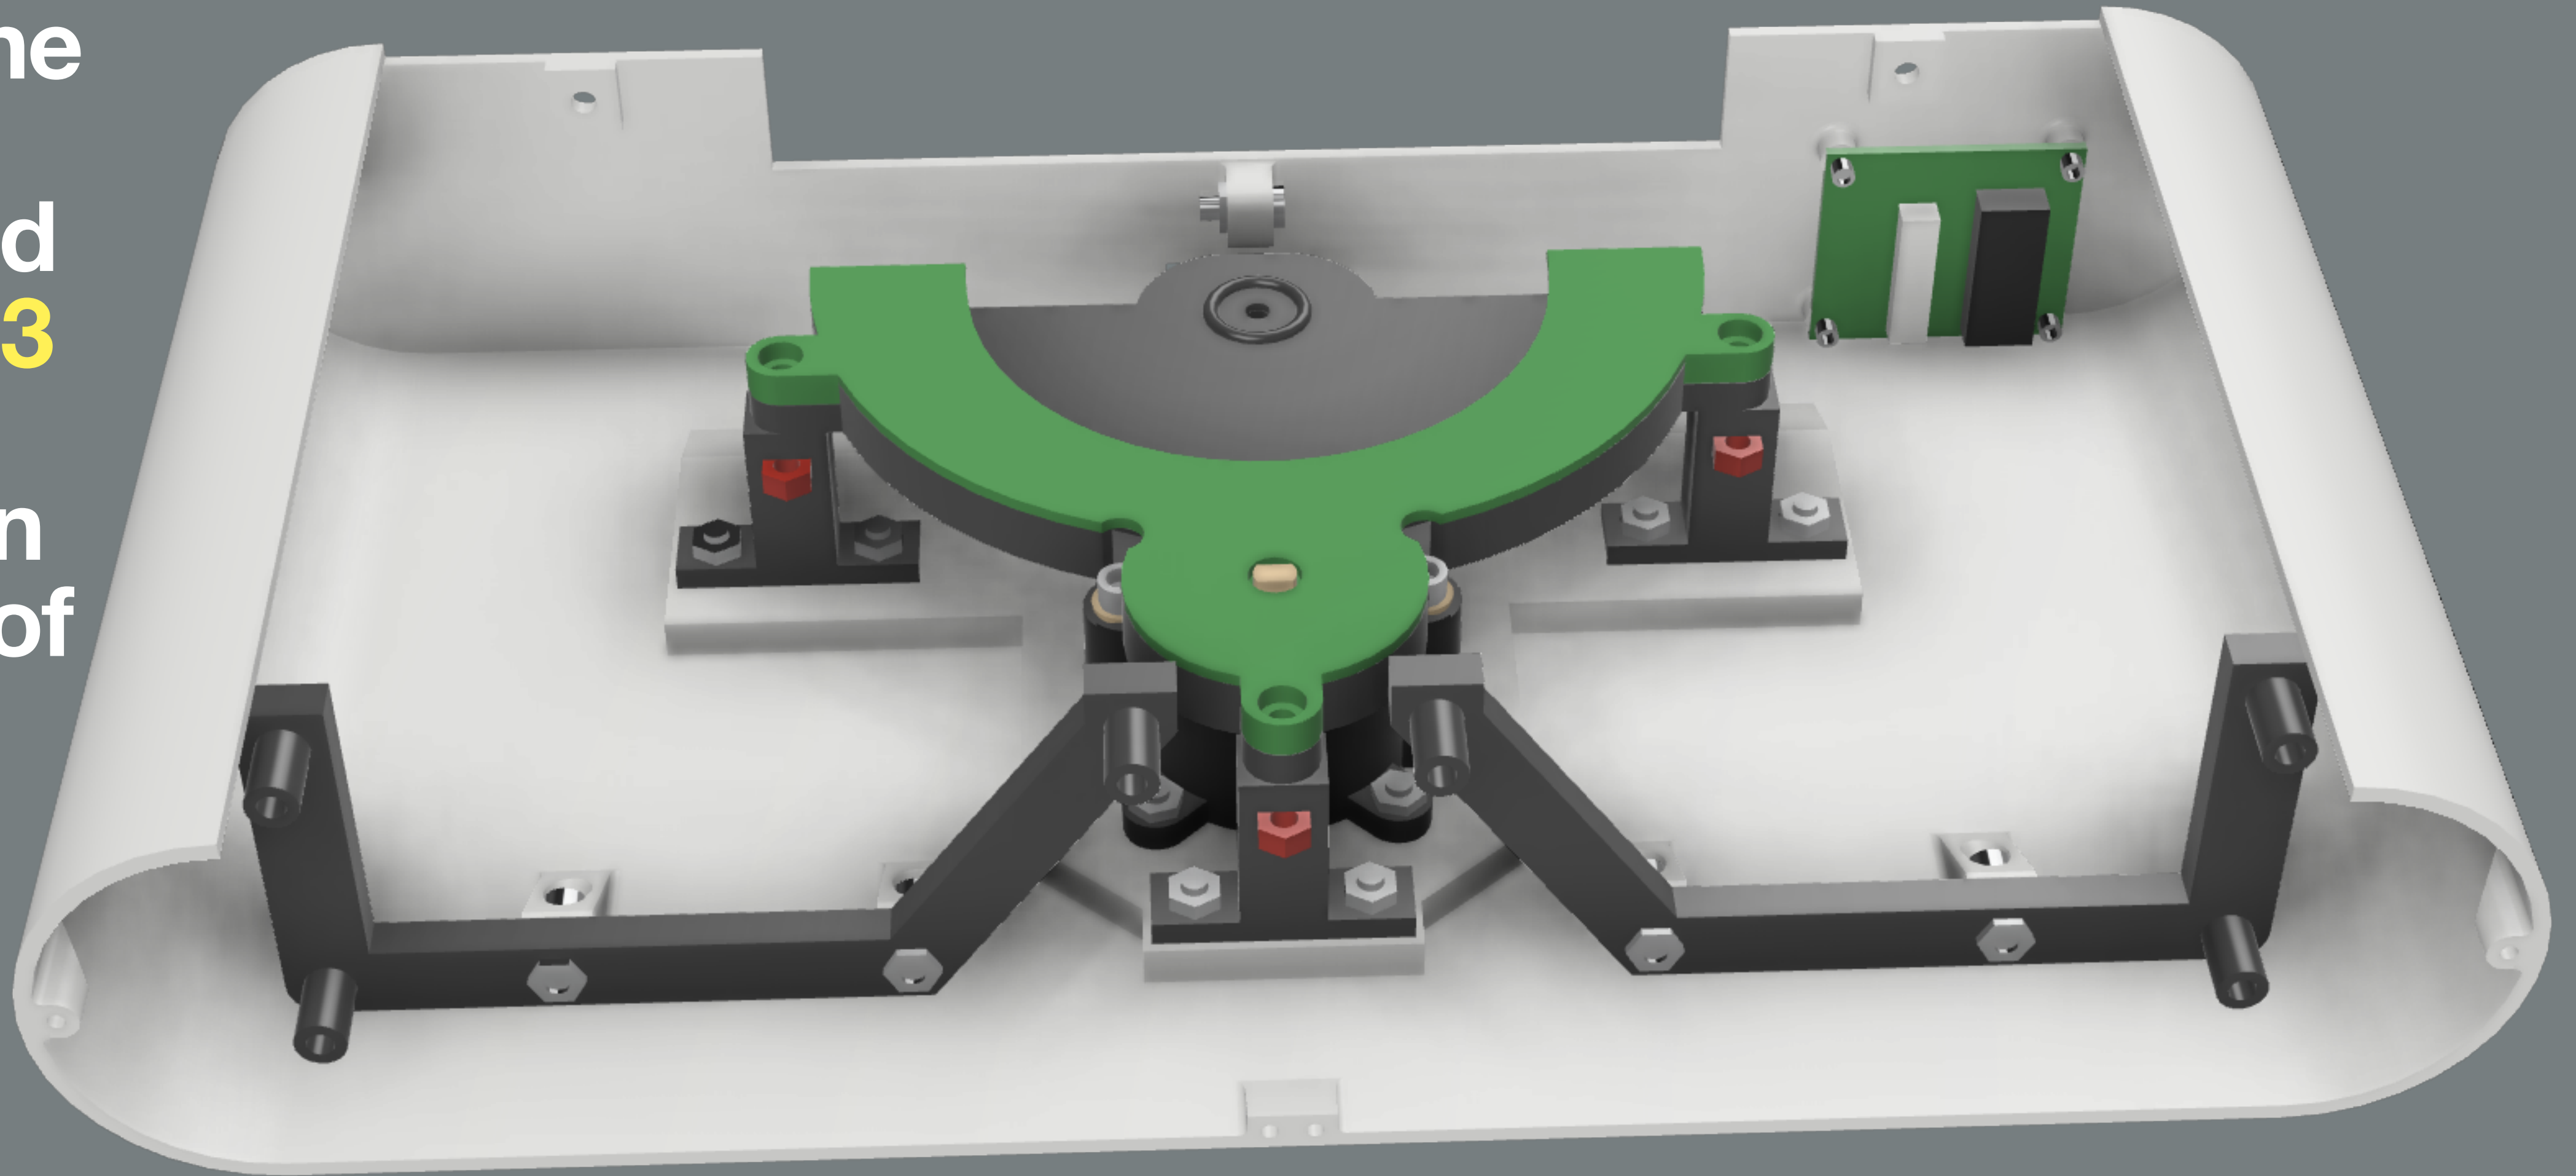

Using **(3)M3x16 Screws**, secure the Gearbox Top through the Gearbox Bottom, and into the **(3)M3 Nuts** inserted within the 3x square gearbox posts in **Step 11**.

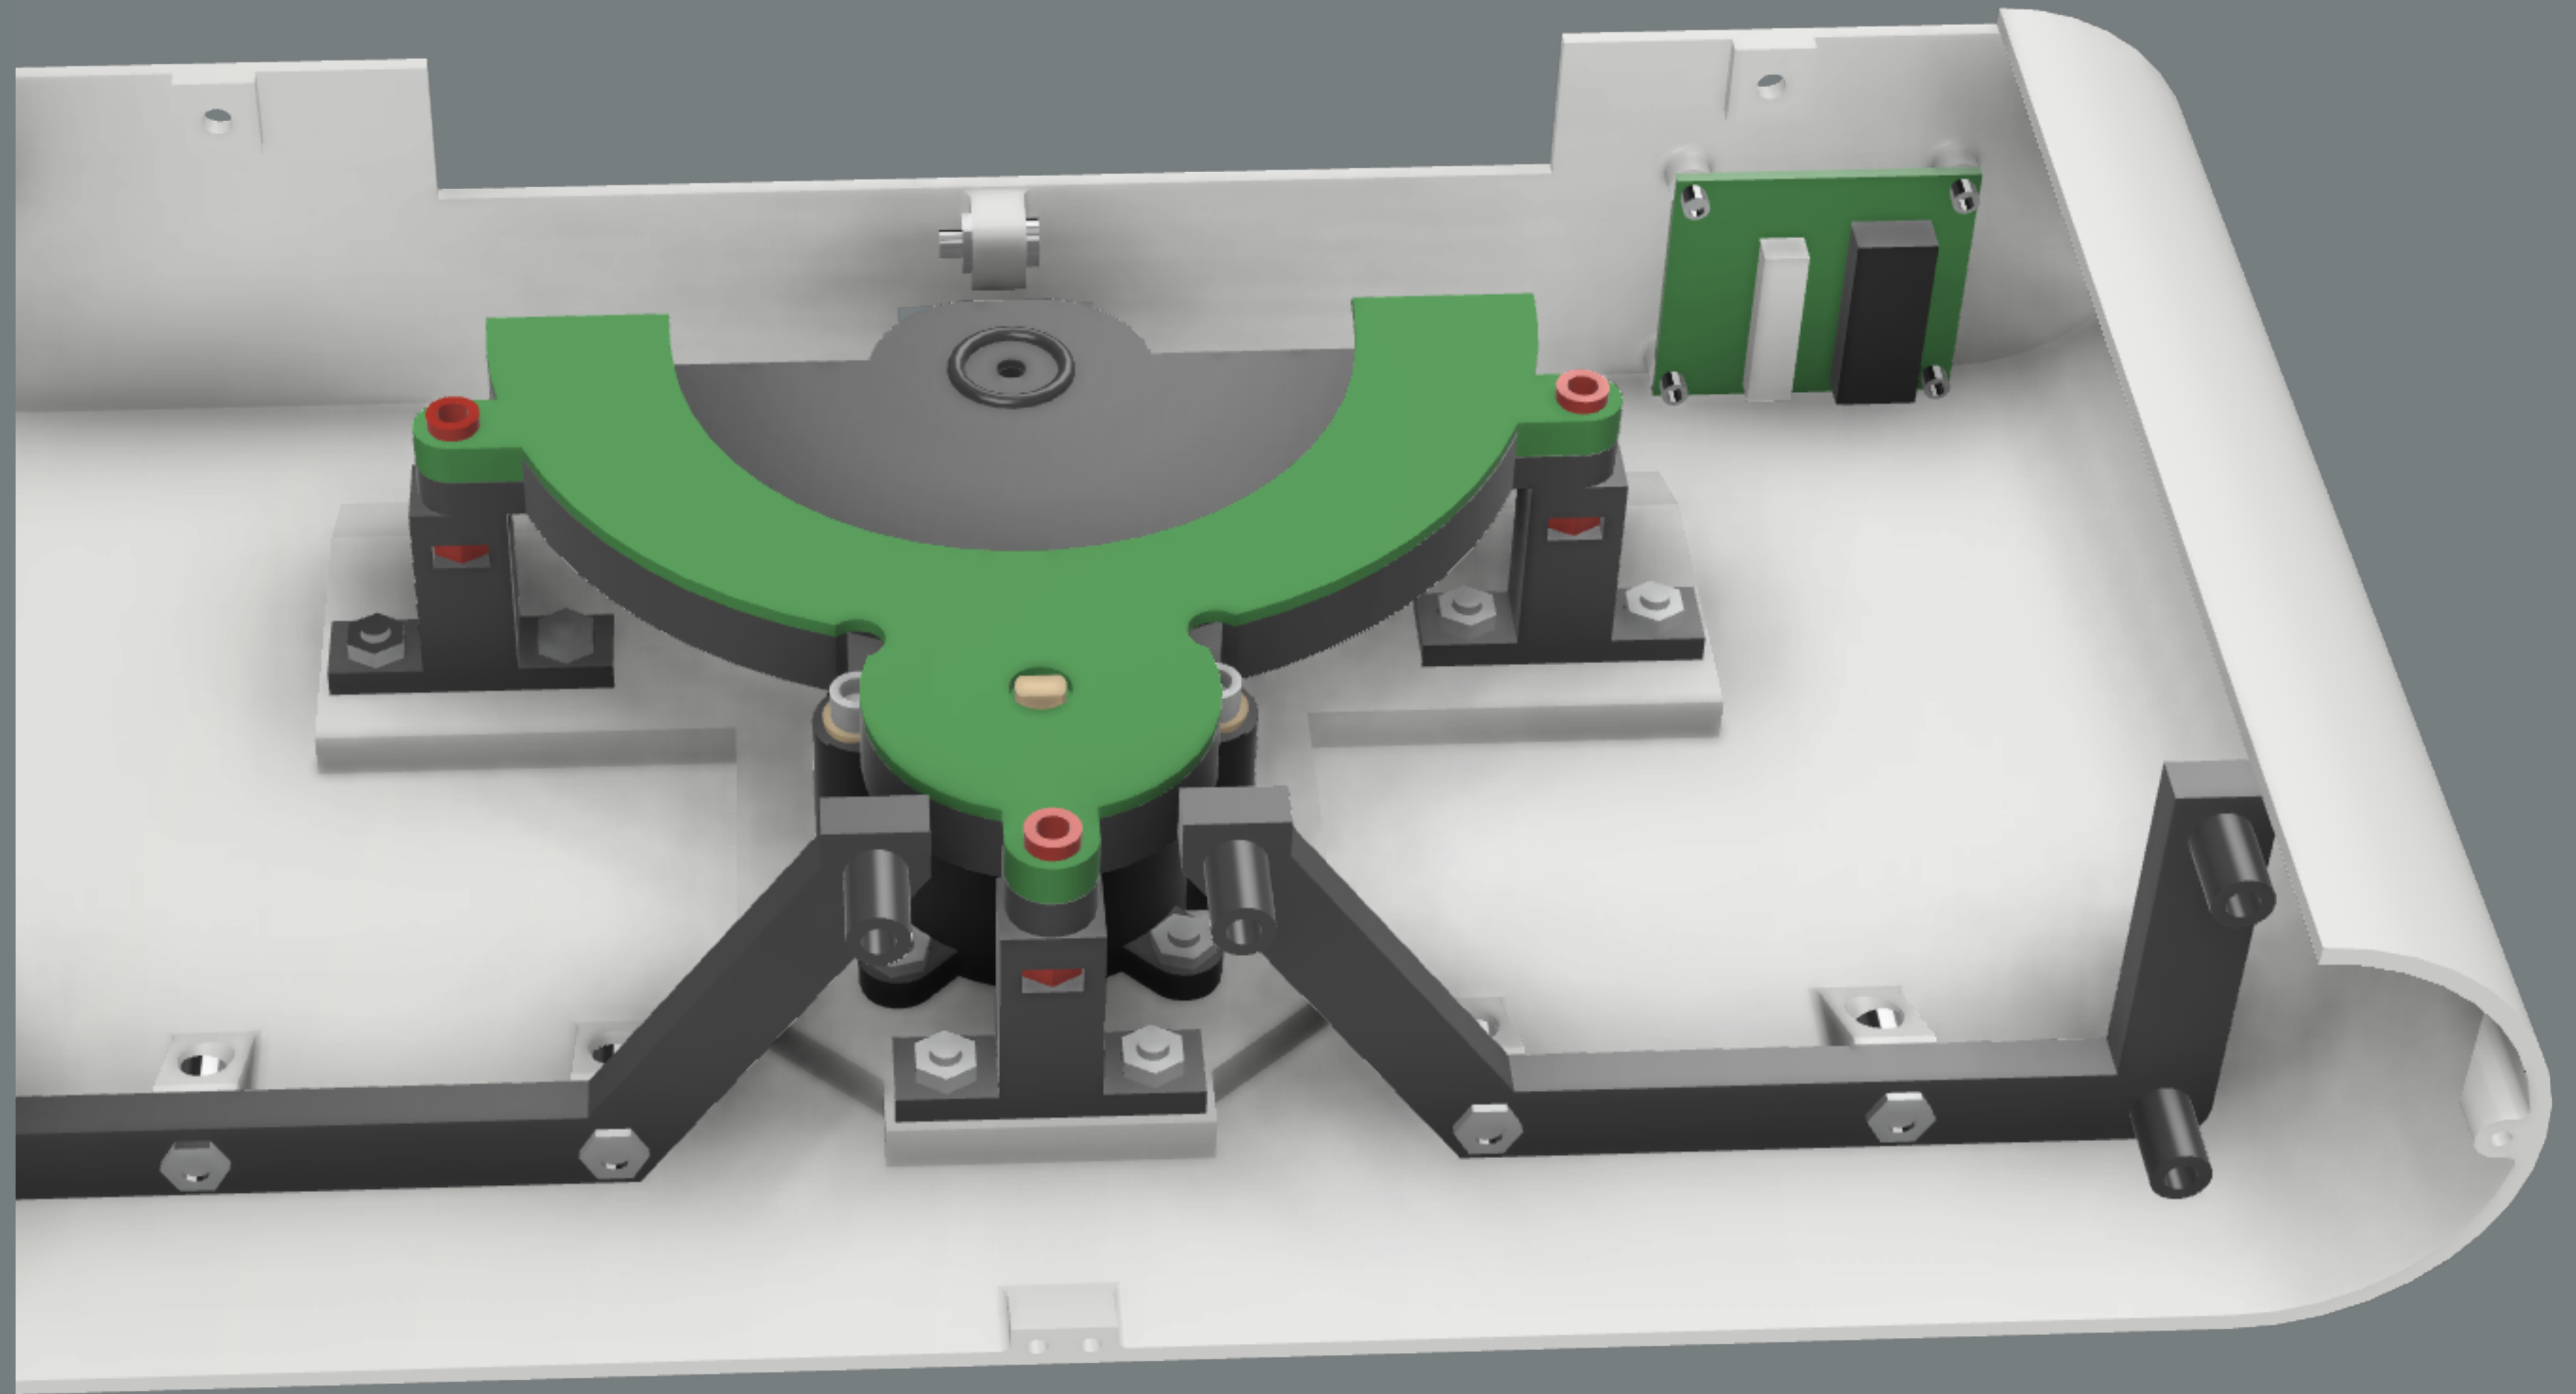


2.5mm Hex Key



Using
(2) M2x6
Screws,
secure the
Arduino
Mount
through to
Speaker
Mount.

Step 13

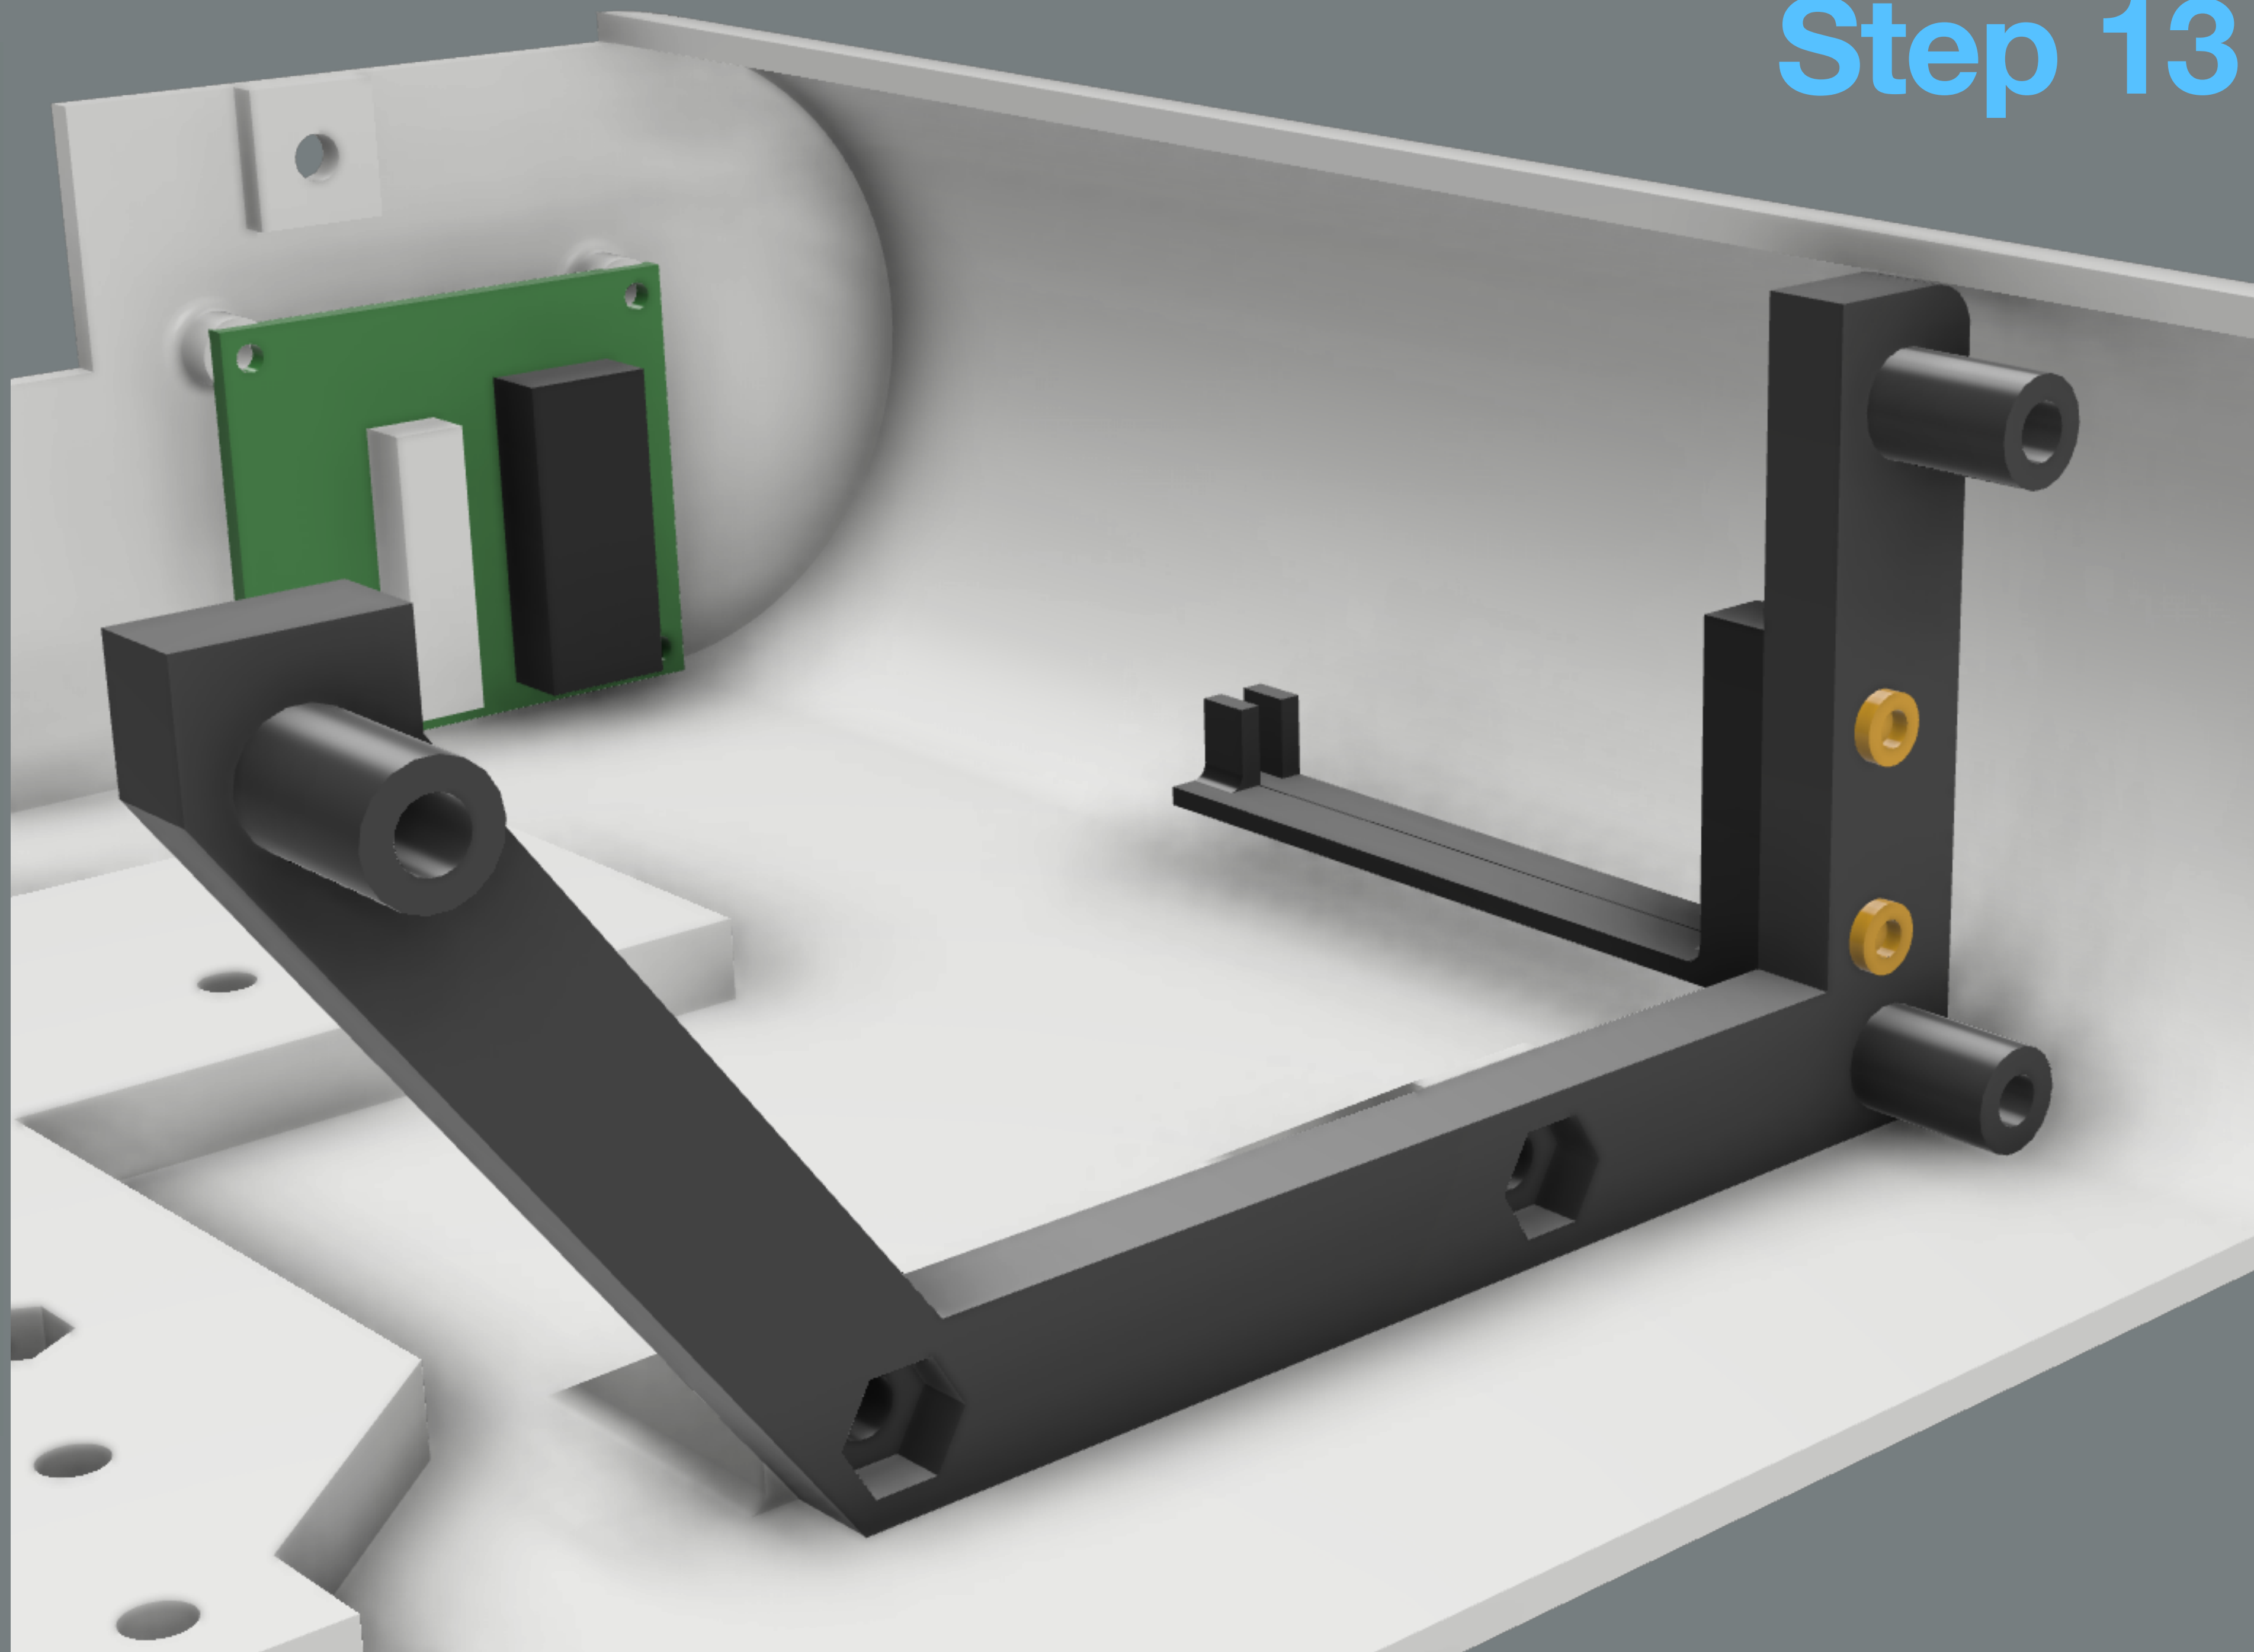

2 mm Hex Key



Place the Arduino into the Arduino Mount and wire it according to the instructions in the Arduino Setup pdf. It may be helpful to wire the connections before mounting the Arduino to ensure everything is functional.

