

TR-1um

Design Rules Summary

for Drawing Layers

2026/09/09

Reflected GitHub issues

<https://github.com/OpenSUSI/TR-1um/issues>

Drawing Layers Table

IMPORTANT


DBU: 0.001um

Scale Factor: 1.0


Min Grid: 0.05um

	Original MASK layers				Proposed Drawing layers					
	Name	NUM	TYPE		Name	NUM	TYPE			
1	PSUB	140	0		WN	140	0			
2	NW	36	0					MDP generatioed		
3	HVNW	141	0					MDP generatioed		
4	L	3	0					MDP generatioed		
					AP	3	1	Active for P+		
					AN	3	2	Active for N+		
					AR	3	3	Active for resistor		
					AC	3	4	Active for capacitance		
5	NF	25	0					MDP generatioed		
6	PF	26	0					MDP generatioed		
7	CL	143	0					MDP generatioed		
8	HPBE	144	0					No USE		
9	HNBE	145	0					No USE		
10	PBE	146	0					MDP generatioed		
11	NBE	147	0					MDP generatioed		
12	HPM	33	0					MDP generatioed		
13	RHP	148	0					No USE		
14	SG	8	0							
					GC	8	1	Gate Poly transistor		
					GR	8	2	Gate POLY resistor		
15	PM	35	0					MDP generatioed		
16	NM	7	0					MDP generatioed		
17	R	12	0					MDP generatioed		
18	PSD	9	0					MDP generatioed		
19	NSD	28	0					MDP generatioed		
20	CONT	11	0		CO	11	0			
21	M1	13	0		M1	13	0			
22	TC	19	0		V1	19	0			
23	M2	20	0		M2	20	0			
24	PRO	14	0		PO	14	0			
	TXM1	48	0		TXM1	48	0	M1 Label		
	PIN	48	1		PIN	48	1	M1 Pin		
	TXM2	49	0		TXM2	49	0	M2 Label		
	MASK	63	0		MASK	63	0	Waiver region		
	PTECT	63	1		PTECT	63	1	Protect region (LOGO)		
	SCRB	80	0		SCRB	80	0	Waiver region (EDGE SEAL)		
	prBoundary	235	0		prBoundary	235	0	Cell boundary		

Cat-1: Prohibited

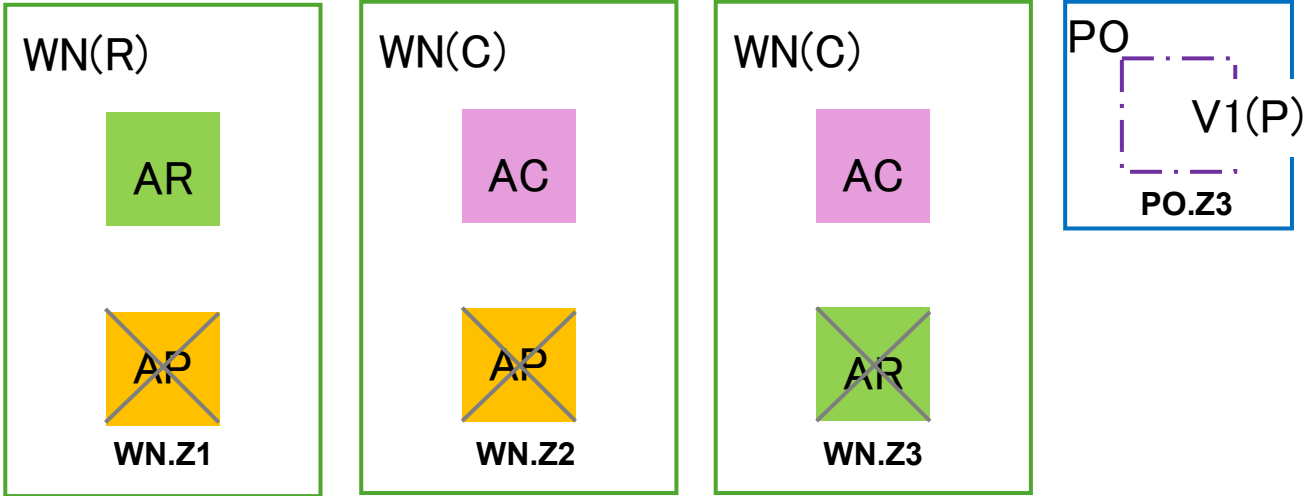

Rule	L1	L2	Func	MIN	MAX
WN.Z1	WN(R)	AP	Prohibit		
WN.Z2	WN(C)	AP	Prohibit		
WN.Z3	WN(C)	AR	Prohibit		
CO.Z1	CO	AA+GC+GR	Require		
CO.Z3	CO	M1	Require		
V1.Z1	V1	M1	Require		
V1.Z2	V1	M2	Require		
PO.Z1	PO	M1	Require		
PO.Z2	PO	M2	Require		
PO.Z3	PO	V1(P)	Contain		

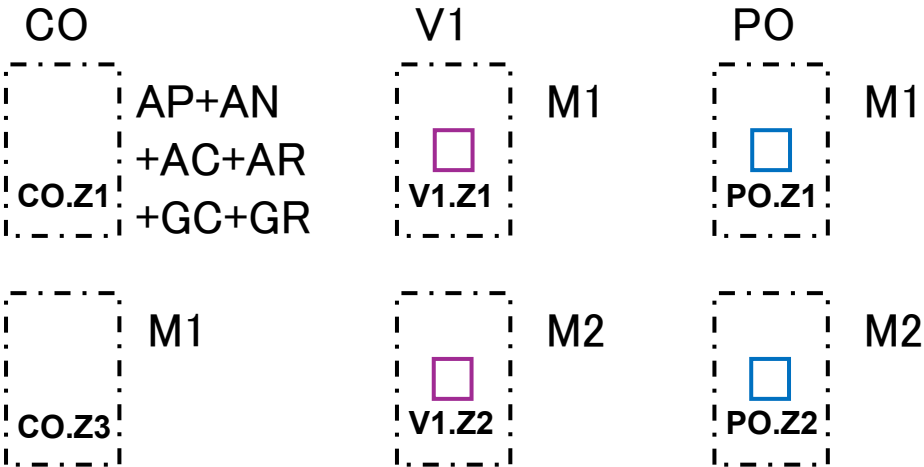


Function:

Wmin/max: L1 Width min/max
Smin/max: L1 Space min/max (L1=L2)
Smin/max: L1 Separate L2 min/max
Emin/max: L1 Enclosed L2 min/max
Fmin/max: L1 Enclosing L2 min/max
Wfix: L1 Width equal
Sfix: Space equal
Nmin: L1 Notch min
Efix: Fixed enclosure
Donut: L1 Souuounded by L2
Prohibit: Must not overlap
Require: Must not be outside
Contain: Must contain
Rect: Must be a rectangle

AA : AP + AN + AC + AR
WN(R) : WN covering AR
WN(C) : WN covering AC
V1(P) : V1 interacting PO

Cat-2: WN to AP/AN/AR/AC related

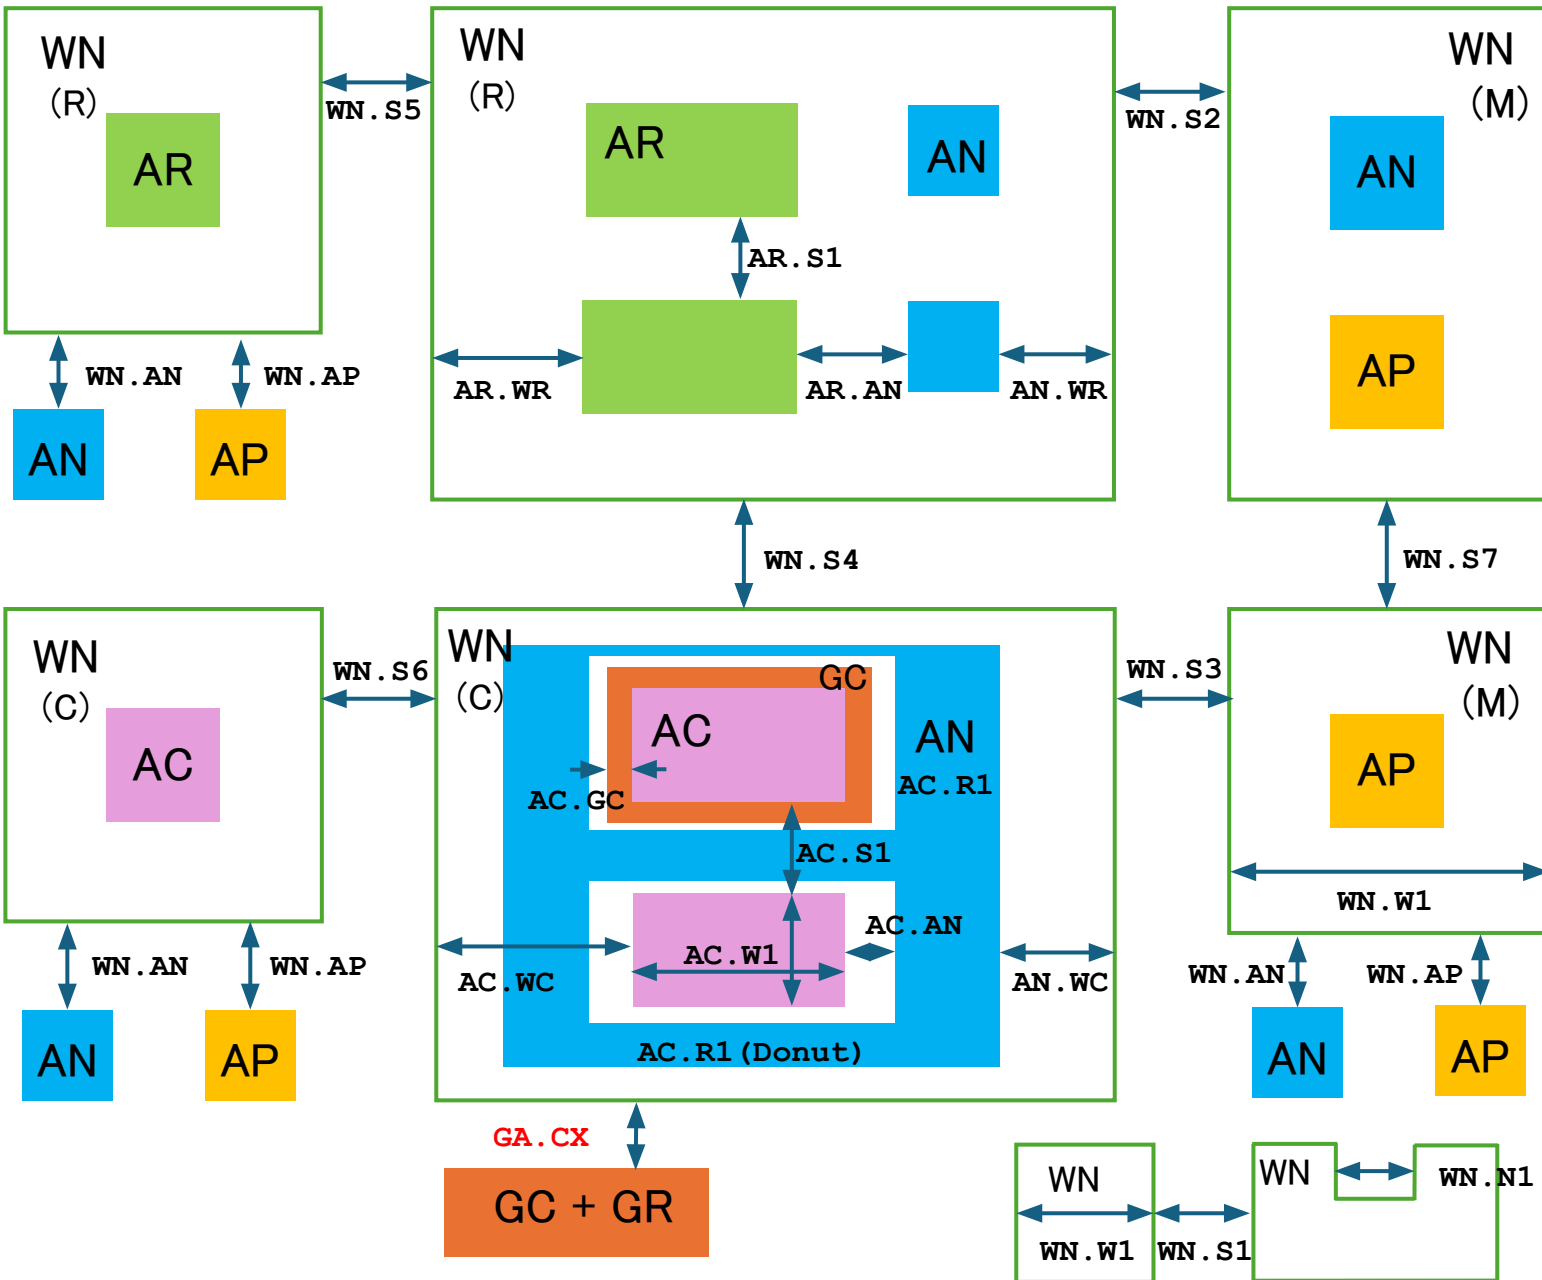


Rule	L1	L2	Func	MIN	MAX
WN.W1	WN		Wmin	8.0	
WN.S1	WN	WN	Smin	4.0	
WN.N1	WN	WN	Nmin	7.0	
WN.S2	WN (R)	WN (M)	Smin	9.5	
WN.S3	WN (C)	WN (M)	Smin	12.0	
WN.S4	WN (R)	WN (C)	Smin	9.5	
WN.S5	WN (R)	WN (R)	Smin	8.0	
WN.S6	WN (C)	WN (C)	Smin	12.0	
WN.S7	WN (M)	WN (M)	Smin	12.0	
WN.AP	WN	AP	Smin	5.0	
WN.AN	WN	AN	Smin	10.0	
AR.S1	AR	AR	Smin	4.0	
AR.WR	AR	WN (R)	Emin	10.0	
AN.WR	AN	WN (R)	Emin	10.0	
AR.AN	AR	AN	Smin	4.0	
AC.W1	AC		Rect	28.5	120.0
AC.S1	AC	AC	Smin	6.4	
AC.WC	AC	WN (C)	Emin	8.0	
AN.WC	AN	WN (C)	Emin	3.0	
AC.AN	AC	AN	Sfix	2.8	2.8
AC.GC	AC	GC	Efix	1.4	1.4
AC.R1	AC	AN (C)	Donut	0.0	
GA.CX	GA (CX)	WN (C)	Smin	1.5	

```

WN(R) : WN covering Resistor(AR)
WN(C) : WN covering Capacitor(AC)
WN(M) : WN covering MOS/Diode(AP)
AN(C) : AN ring for Capacitor WN(C)
GA(CX) : GC+GR not covering AC

```


Cat-3: MOS transistor related

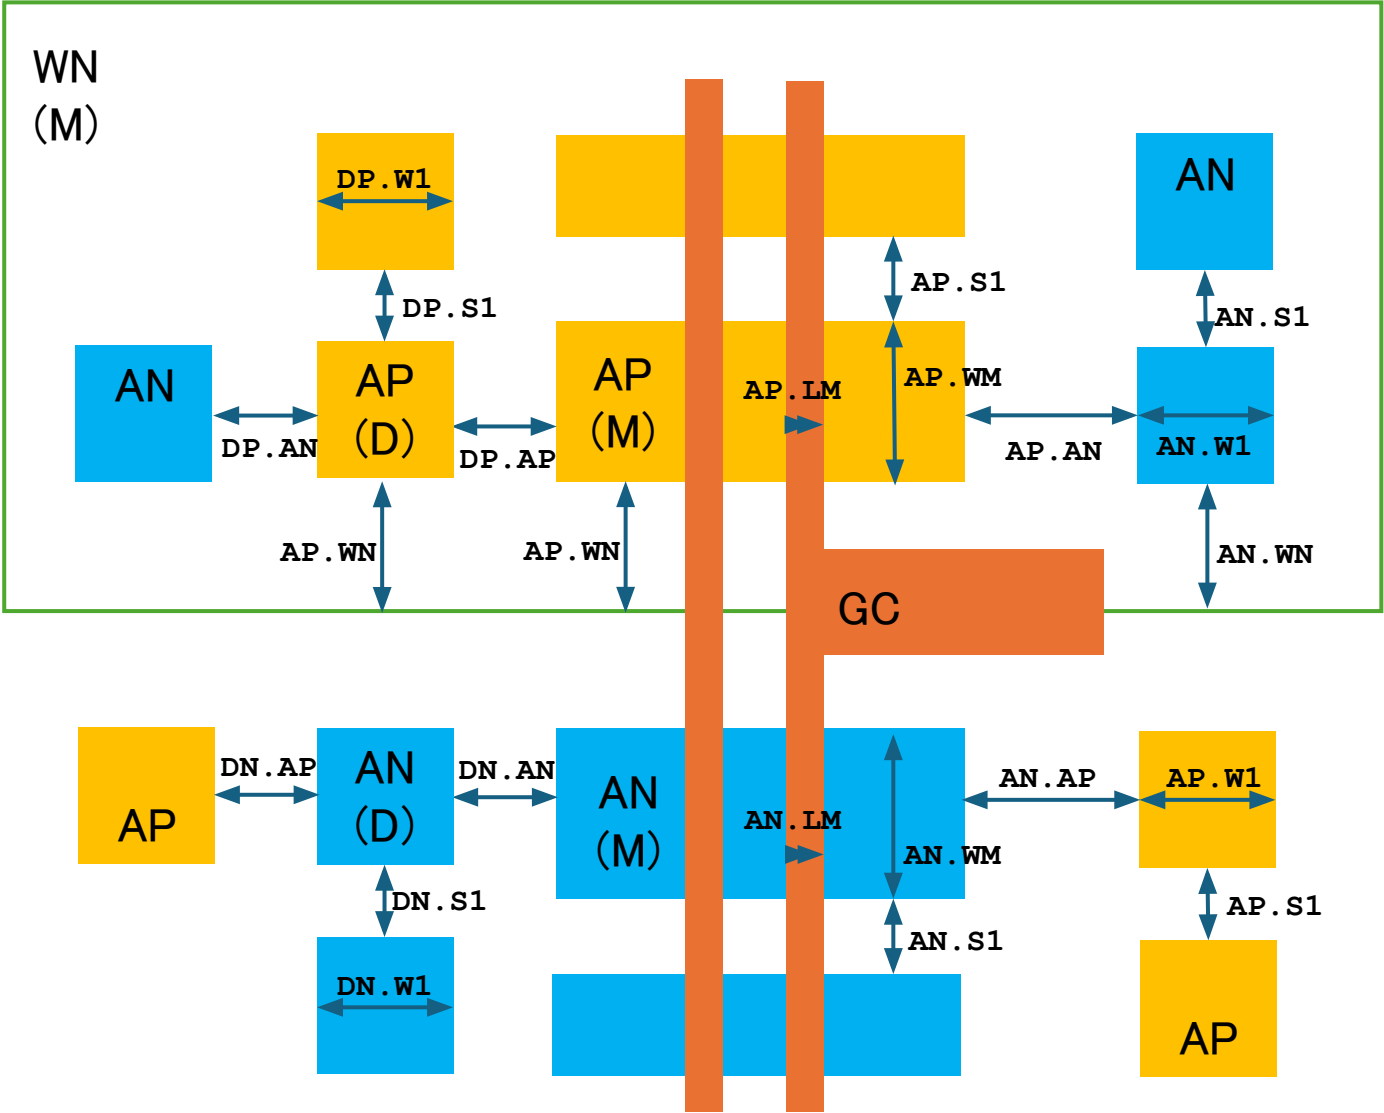

Rule	L1	L2	Func	MIN	MAX
AP.W1	AP		Wmin	1.4	
AP.S1	AP	AP	Smin	1.4	
AP.AN	AP	AN	Smin	2.8	
AP.WM	PMOS	AP-GC	Wmin/max	3.4	60.0
AP.LM	PMOS	GC-AP	Lmin/max	1.0	30.0
AP.WN	AP	WN	Emin	7.0	
DP.W1	DP		Wmin	3.6	
DP.S1	DP	DP	Smin	1.4	
DP.AP	DP	AP (M)	Smin	2.8	
DP.AN	DP	AN	Smin	2.8	
AN.W1	AN		Wmin	1.4	
AN.S1	AN	AN	Smin	1.4	
AN.AP	AN	AP	Smin	2.8	
AN.WM	NMOS	AN-GC	Wmin/max	3.4	60.0
AN.LM	NMOS	GC-AN	Lmin/max	1.0	30.0
AN.WN	AN	WN (M)	Emin	5.0	
DN.W1	DN		Wmin	3.6	
DN.S1	DN	DN	Smin	1.4	
DN.AP	DN	AP	Smin	2.8	
DN.AN	DN	AN (M)	Smin	2.8	

AP (M) / PMOS : AP for 5V PMOS
AN (M) / NMOS : AN for 5V NMOS
AP (D) / DP : AP for P-Diode
AN (D) / DN : AN for N-Diode
WN (M) : WN covering PMOS





Cat-4: Contact and Poly related

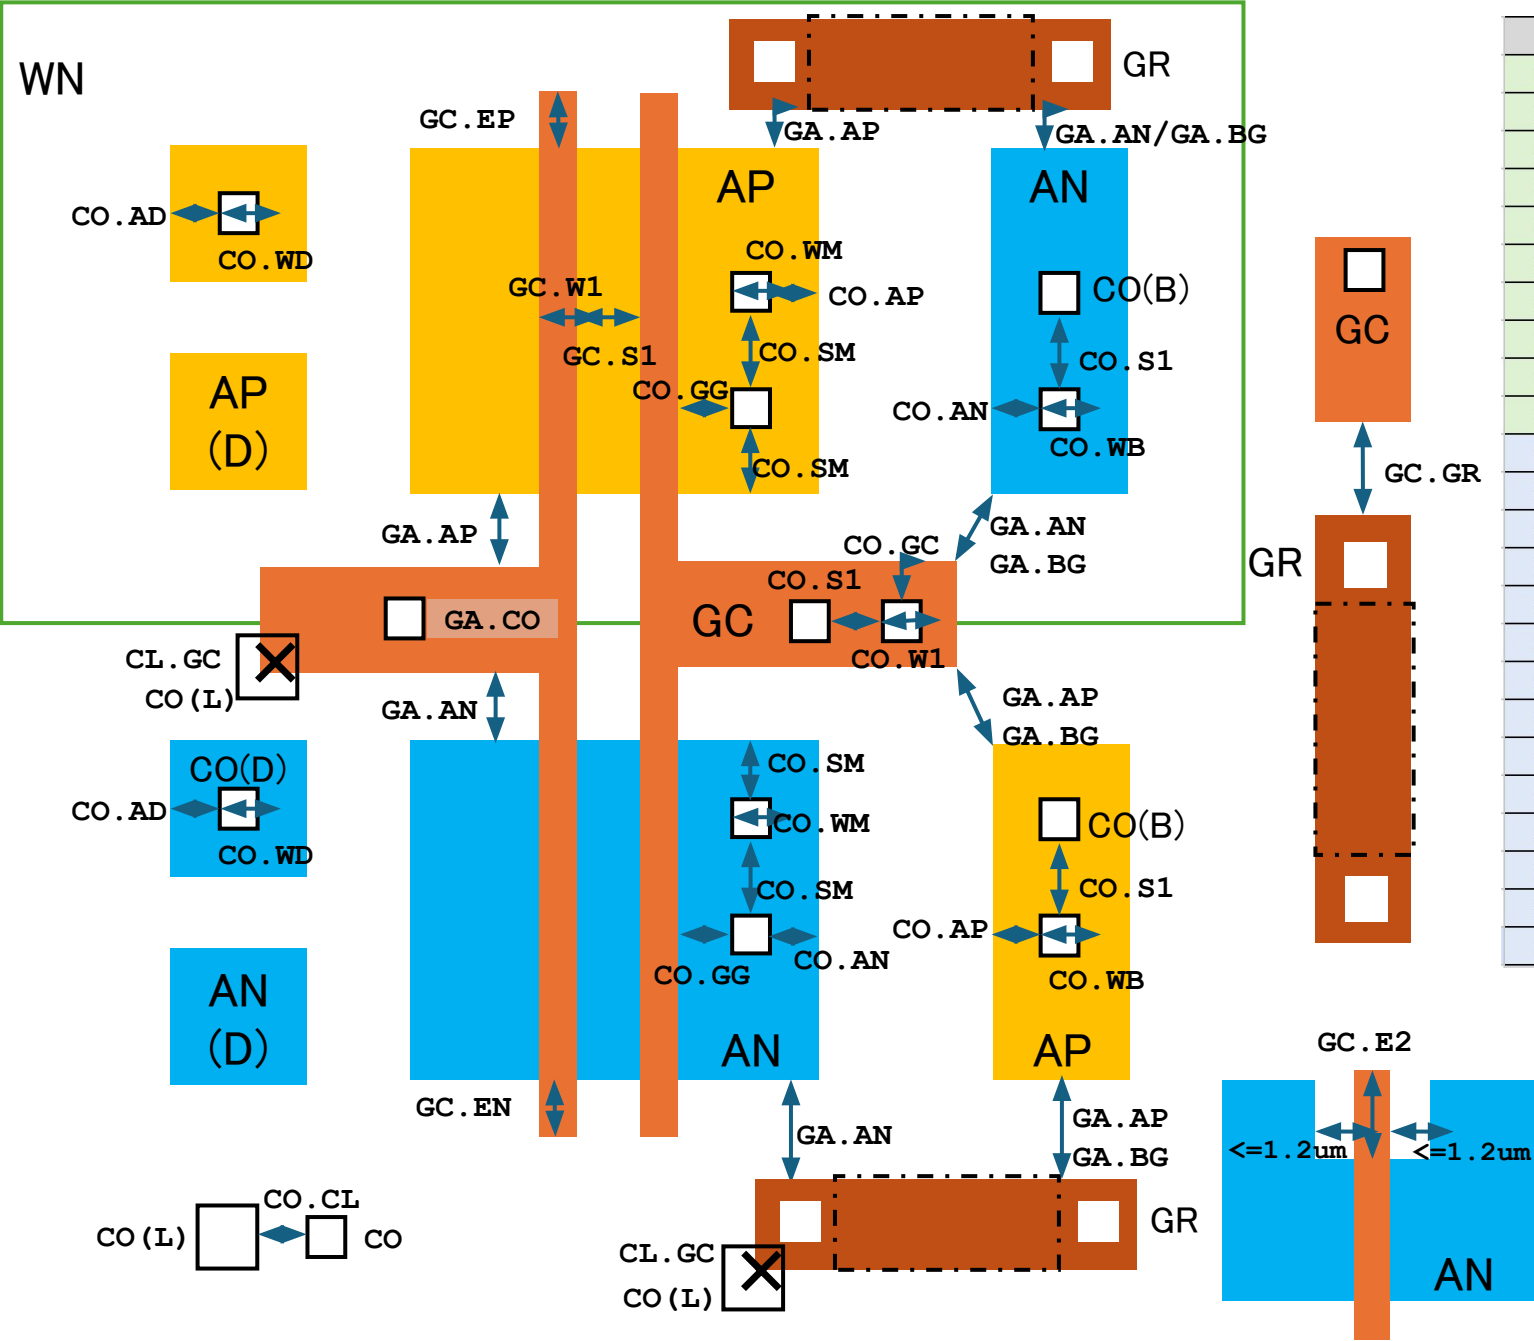

Rule	L1	L2	Func	MIN	MAX
GC.W1	GC		Wmin	1.0	
GC.S1	GC	GC	Smin	1.2	
GC.GR	GC	GR	Smin	1.2	
GA.AP	GA	AP	Smin	0.4	
GA.AN	GA	AN	Smin	0.4	
GC.EP	AP	GC	Emin	1.2	
GC.EN	AN	GC	Emin	1.2	
GC.E2	AM	GC	ECmin	2.4	
GA.BG	GA	BG	Prohibit		
GA.CO	GA	CO	Contain		
CO.W1	CO		Rect	1.0	97.0
CO.WM	CO (M)		Wfix	1.0	1.0
CO.WB	CO (B)		Wfix	1.0	1.0
CO.S1	CO	CO	Smin	1.0	
CO.CL	CO (L)	CO	Smin	1.6	
CO.SM	CO (M)	CO (M)	Sfix	1.0	1.0
CO.WD	CO (D)		Wfix	1.2	1.2
CO.SD	CO (D)	CO	Smin	1.2	
CO.AD	CO (D)	AP+AN	Emin	1.2	
CO.AP	CO	AP	Emin	0.8	
CO.AN	CO	AN	Emin	0.8	
CL.GC	CO (L)	GC+GR	Prohibit		
CO.GG	CO (M)	GC	Sfix	1.0	1.0
CO.GC	CO	GC+GR	Emin	0.8	

GA : GC/GR (all Poly)
BG : AP/AN for MOS Back-gate
CO(M) : CO on PMOS/NMOS source/drain
CO(B) : CO on BG
CO(D) : CO on AP(D) /AN(D)
CO(L) : CO (Area>=1.5um²)

Cat-5: Resistors(AR/GR) and Capacitor(AC) related

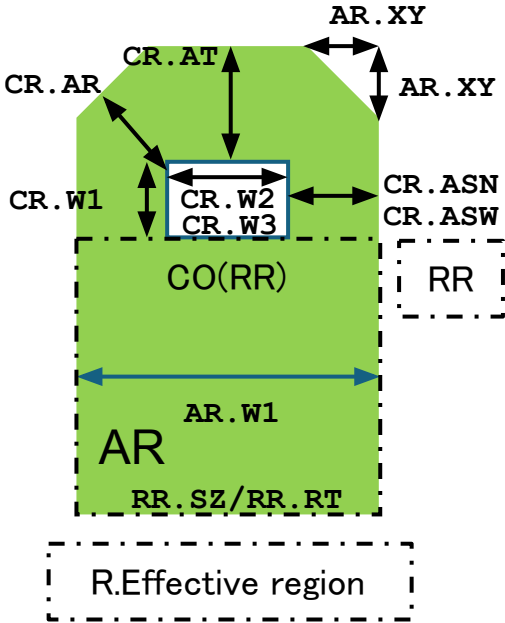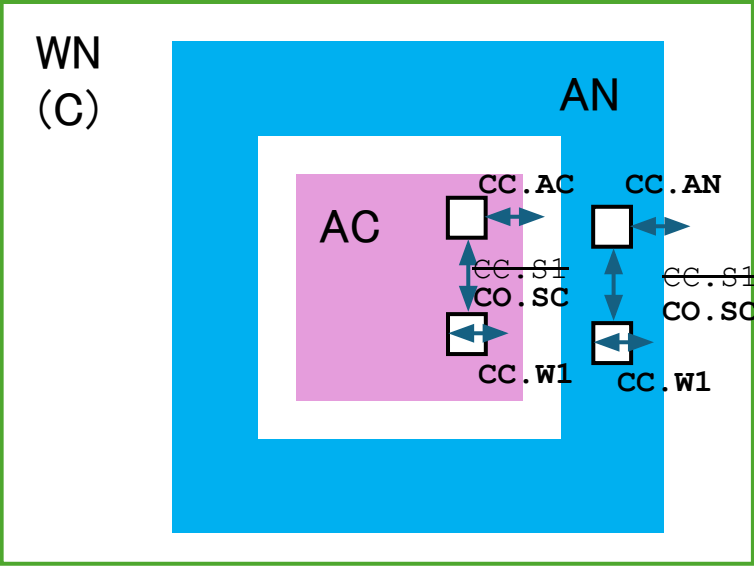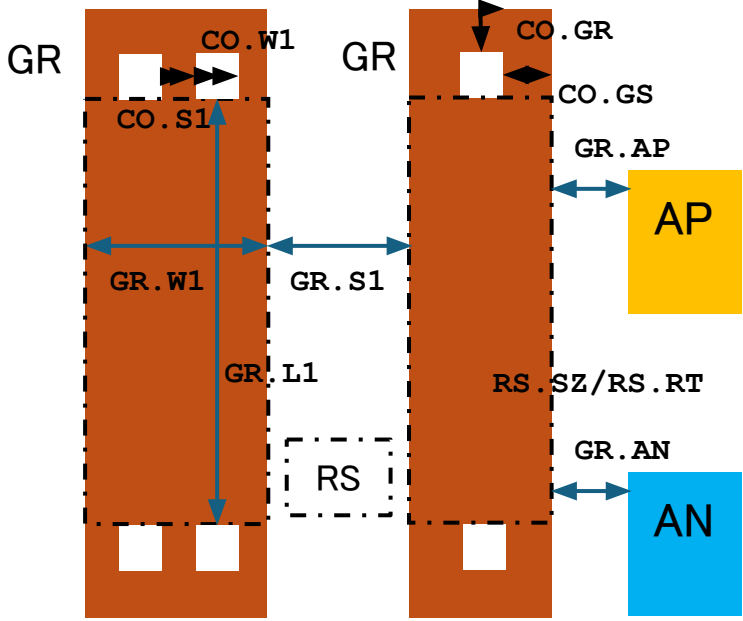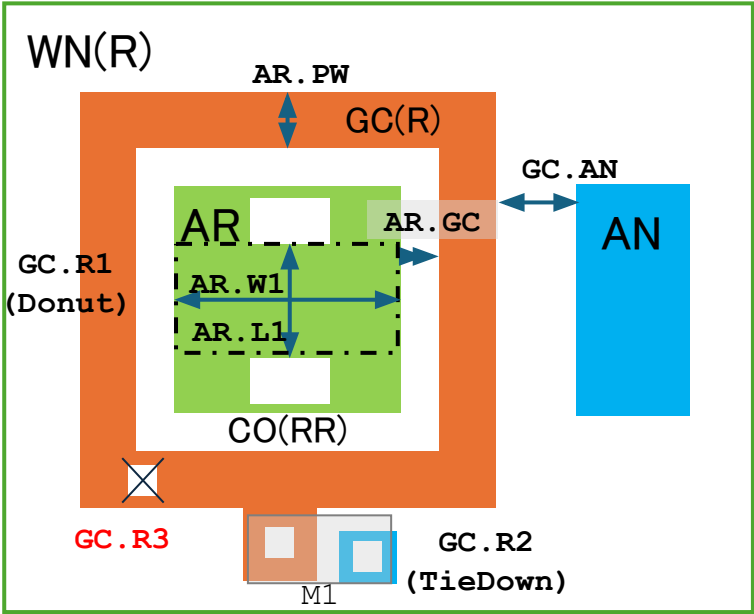

Rule	L1	L2	Func	MIN	MAX
AR.W1	RR	RR (W)	Wmin/max	2.8	20.0
AR.L1	RR	RR (L)	Lmin/max	13.0	100.0
RR.SZ	RR	RROK	Contain		
RR.RT	RR		Rect		
AR.GC	AR	GC	Sfix	1.0	
AR.PW	GC (R)		Wmin	2.0	
AR.XY	AR	Bevel	XYmin	1.0	
GC.AN	GC (R)	AN	Smin	???	???
GC.R1	AR	GC (R)	Donut	0.0	
GC.R2	GC (R)	WN (R)	TieDown	0.0	
GC.R3	GC (RR)	CO	Prohibit		
GR.W1	RS	RS (W)	Wmin/max	4.0	20.0
GR.L1	RS	RS (L)	Lmin/max	20.0	100.0
RS.SZ	RS	RSOK	Require		
RS.RT	RS		Rect		
GR.S1	RS	RS	Smin	2.0	
GR.AP	GR	AP	Smin	2.8	
GR.AN	GR	AN	Smin	2.8	
CR.W1	CO (RR)		Wmin	1.0	
CR.W2	CO (RRW)		Lmin/max	1.6	17.6
CR.W3	CO (RRN)		Wfix	1.0	1.0
CR.AR	CO (RR)	AR	Emin	0.8	
CR.AT	CO (RR)	AR (T)	Emin	1.5	
CR.ASN	CO (RRN)	ARN (S)	Efix	0.9	
CR.ASW	CO (RRW)	ARW (S)	Efix	1.2	
CC.W1	CO (C)		Wfix	1.2	1.2
CC.S1	CO (C)	CO (C)	SFIX	1.2	1.2
CO.SC	CO (C)	CO	Smin	1.2	
CC.AC	CO (C)	AC	Emin	2.9	
CC.AN	CO (C)	AN	Emin	1.2	
ES.S1	CO (RS)	CO (RS)	SFIX	1.0	1.0
CO.GR	CO	GR	Emin	0.8	
CO.GS	CO (RSM)	GR (S)	Efix	1.5	1.5
CO.RT	CO (RSM)		Rect		

RR(W) : Width of AR effective

RR(L) : Length of AR effective

RROK : Allowed W=2.8,4,6,12,20

GC(R) : GC in WN(R)

RS(W) : Width of GR effective

RS(L) : Length of GR effective

RSOK : Allowed W=4,6,12,20

WC : WN interacting AC

AR(T) : AR top fringe

CO(RR) : CO on AR

CO(RRW) : CO on AR (W>=4.0)

CO(RRN) : CO on AR (W=2.8)

ARN(S) : AR side fringe (W=2.8)

ARW(S) : AR side fringe (W>=4.0)

CO(C) : CO on WC


CO(RS) : CO on GR

GR(S) : GR side fringe

CO(RSM) : CO(sized) & GR(S)

*Strike-through rules are not yet implemented


Cat-6: M1/V1/M2 related

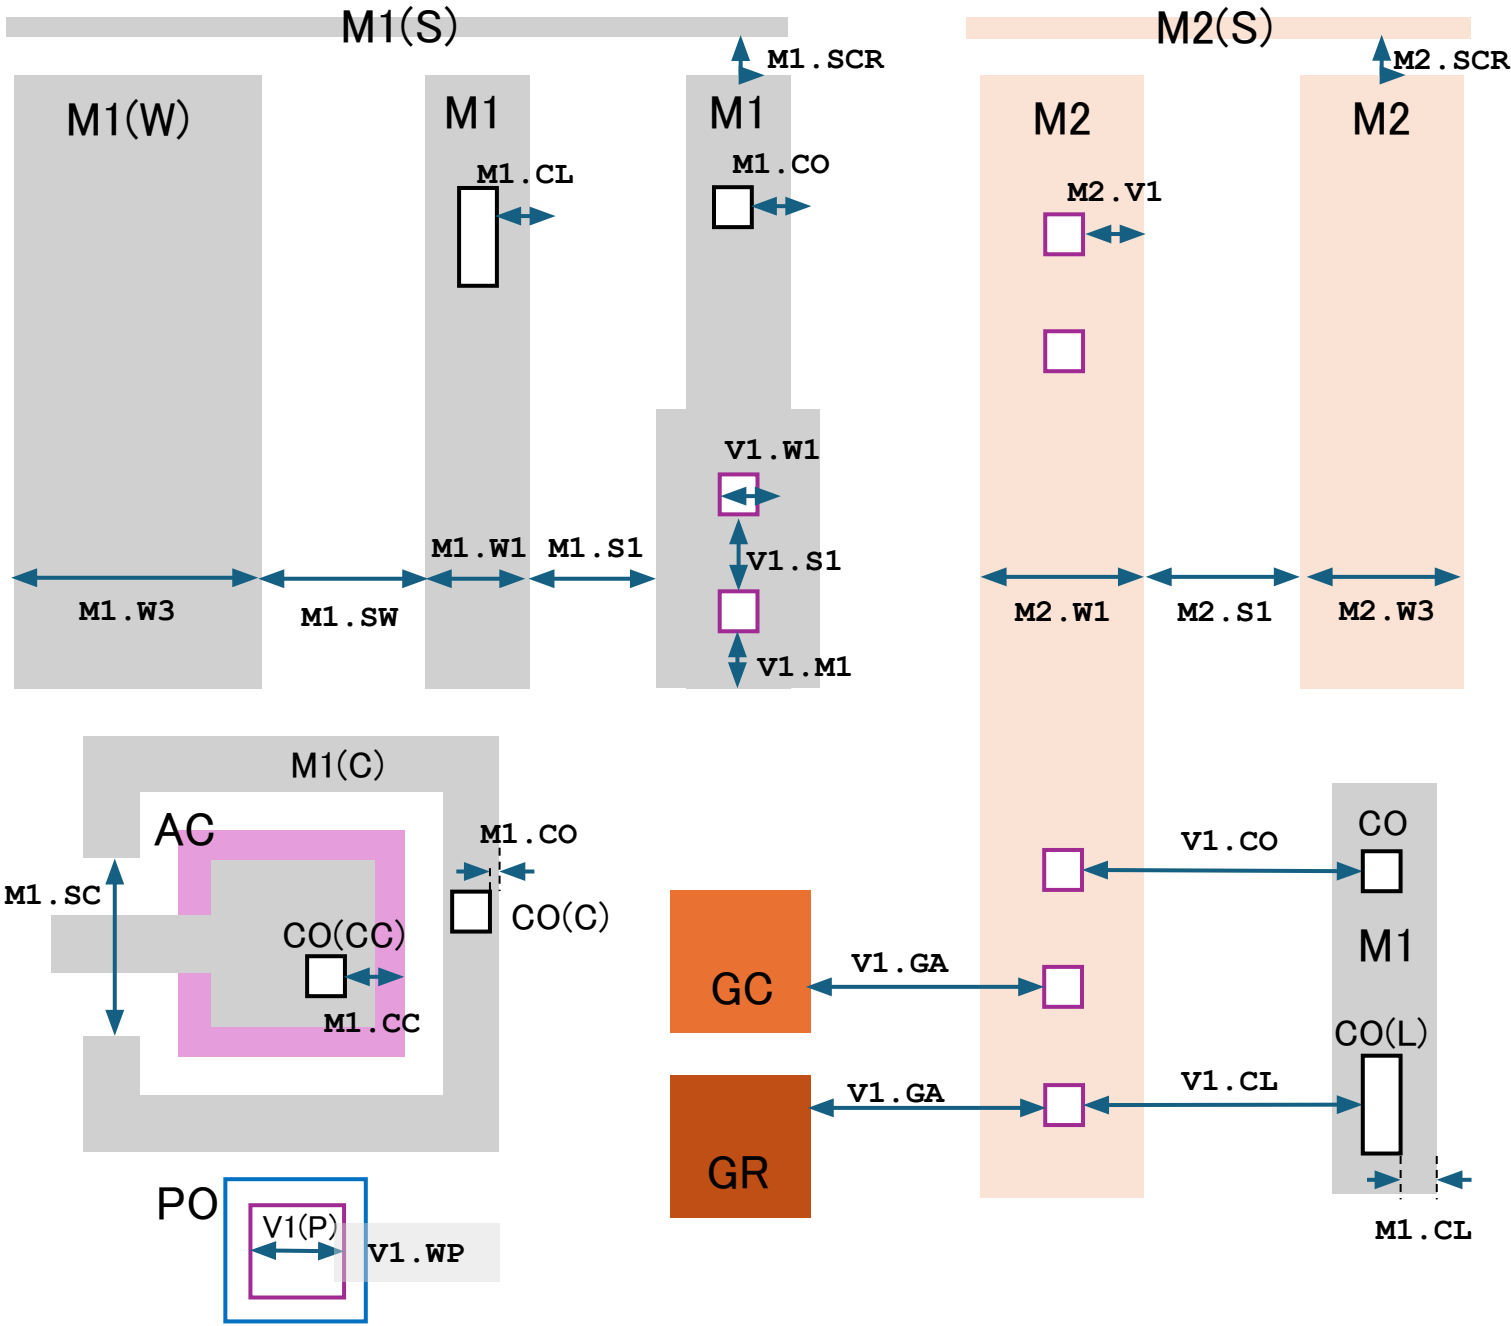

Rule	L1	L2	Func	MIN	MAX
M1.W1	M1		Wmin	1.8	
M1.W2	M1 (W)		WMIN	10.0	
M1.W3	M1 (I)		Wmax		45.0
M1.S1	M1	M1	Smin	1.4	
M1.SC	ANC	M1C	Smin/Smax	10.0	10.0
M1.CO	M1	CO	Fmin	0.8	
M1.CC	M1	CO (CC)	Fmin	1.3	
M1.CL	M1	CO (L)	Fmin	1.2	
M1.SW	M1 (W)	M1	Smin	2.0	
V1.W1	V1 (S)		Wfix	1.4	1.4
V1.WP	V1 (P)		Wmin	60.0	
V1.S1	V1	V1	Smin	1.5	
V1.M1	V1	M1	Emin	1.0	
V1.GA	V1	GA	Smin	1.2	
V1.CO	V1	CO	Smin	1.0	
V1.CL	V1	CO (L)	Smin	1.4	
M2.W1	M2		Wmin	3.0	
M2.W3	M2 (I)		Wmax		45.0
M2.S1	M2	M2	Smin	2.0	
M2.V1	M2	V1	Fmin	1.0	
M1.SCR	M1 (S)	M1	Smin	5.0	
M2.SCR	M2 (S)	M2	Smin	5.0	

GA : GC/GR(all poly)
M1 (W) : Wide M1 (W>10.0um)
M1 (I) : M1 outside Pad/Capacitor
M2 (I) : M2 outside Pad/Capacitor
M1 (C) /M1C : M1 ring for Capacitor WN
M1 (S) : M1 in scribe ring
M2 (S) : M2 in scribe ring
CO (C) : CO on M1 (C) (W=1.2um)
CO (CC) : CO on AC (W=1.2um)
CO (L) : CO large contact (Area>=1.5um²)
V1 (S) : V1 in core region
V1 (P) : V1 on Pad

Cat-7: ESD MOS transistor related

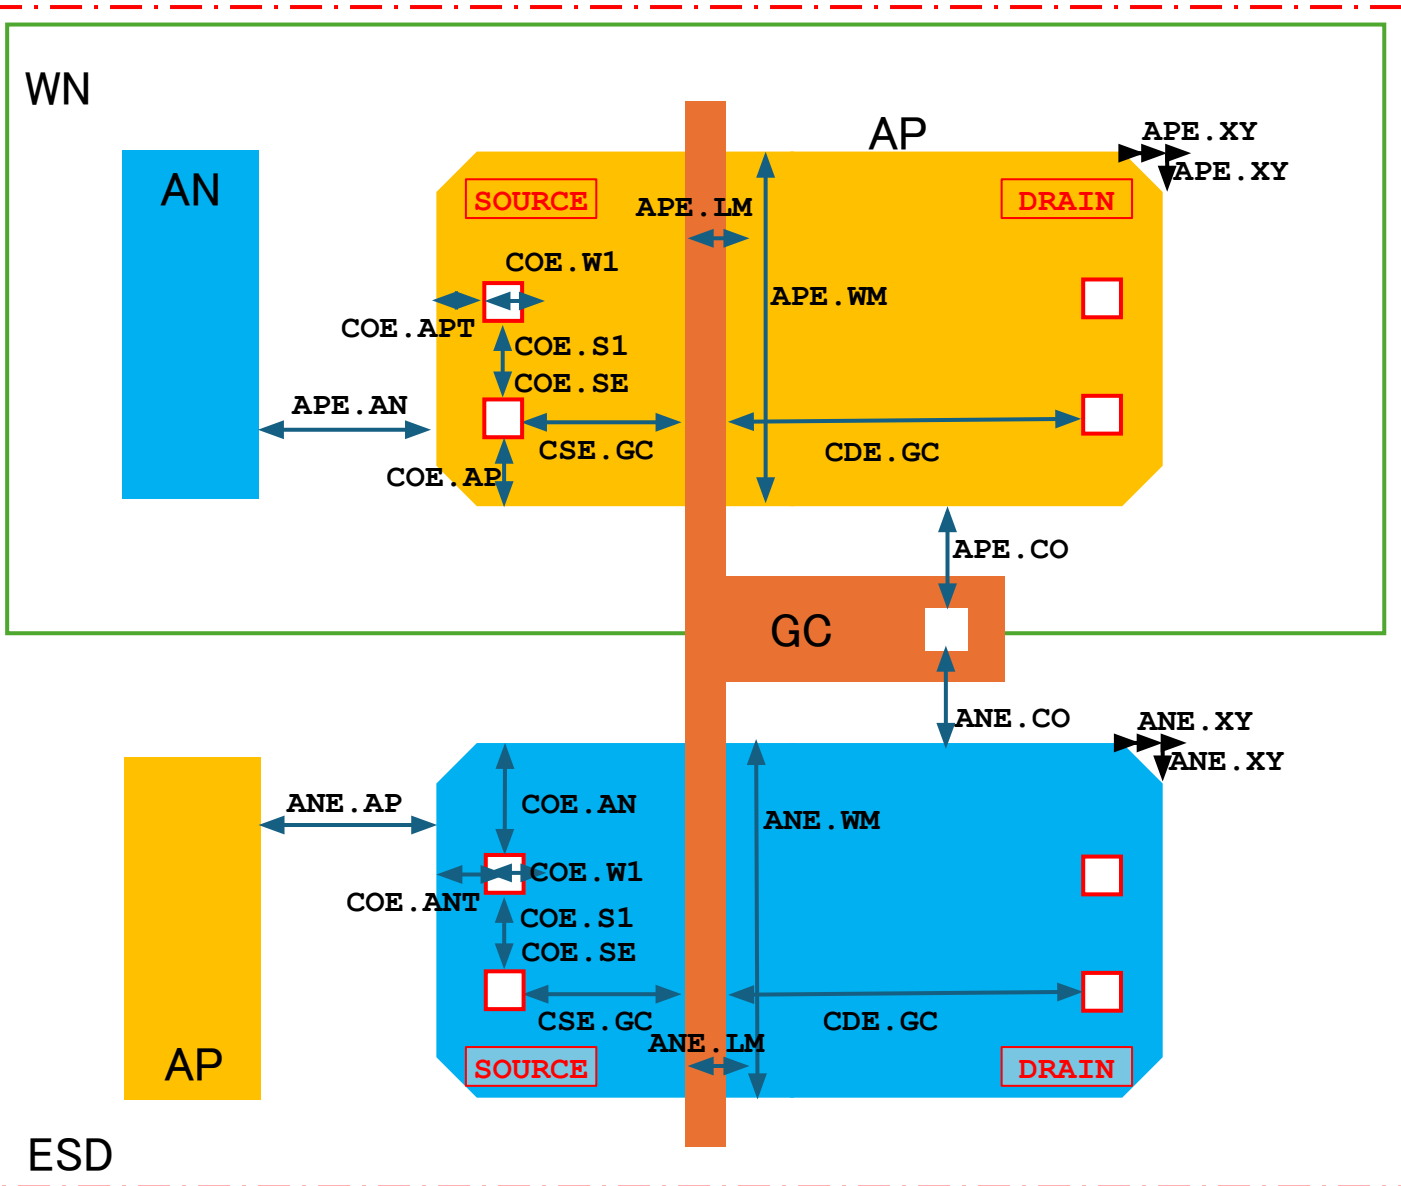

Rule	L1	L2	Func	MIN	MAX
APE.WM	PMOSE	APE-GC	Wmin/max	11.0	60.0
APE.LM	PMOSE	GC-APE	Lmin/max	2.0	30.0
APE.AN	APE	AN	Smin	10.0	
APE.XY	APE	Bevel	XYmin	1.4	
APE.CO	APE	CO	Smin	2.0	
ANE.WM	NMOSE	ANE-GC	Wmin/max	11.0	60.0
ANE.LM	NMOSE	GC-ANE	Lmin/max	2.0	30.0
ANE.AP	ANE	AP	Smin	10.0	
ANE.XY	ANE	Bevel	XYmin	1.4	
ANE.CO	ANE	CO	Smin	2.0	
COE.W1	CO(E)		Wfix	3.0	3.0
COE.S1	CO(E)	CO	Smin	1.6	
COE.SE	CO(E)	CO(E)	Sfix	1.6	1.6
CDE.GC	CD(E)	GC	Sfix	7.0	
CSE.GC	CS(E)	GC	Sfix	3.0	
COE.AP	CO(E)	AP	Emin	2.5	
COE.AN	CO(E)	AN	Emin	2.5	
COE.APT	CO(E)	AP(T)	Emin	4.0	
COE.ANT	CO(E)	AN(T)	Emin	4.0	

MPE : AP for ESD PMOS

CO (E) : CO on ESD

MNE : AN for ESD NMOS

CD (E) : CO on ESD/Drain

PMOSE : ESD PMOS Gate

CS (E) : CO on ESD/Source

NM0SE : ESD NMOS Gate


APE : MPE

ANE : MNE

AP (T) : AP Side Edges

AN (T) : AN Side Edges

Cat-8: PAD related

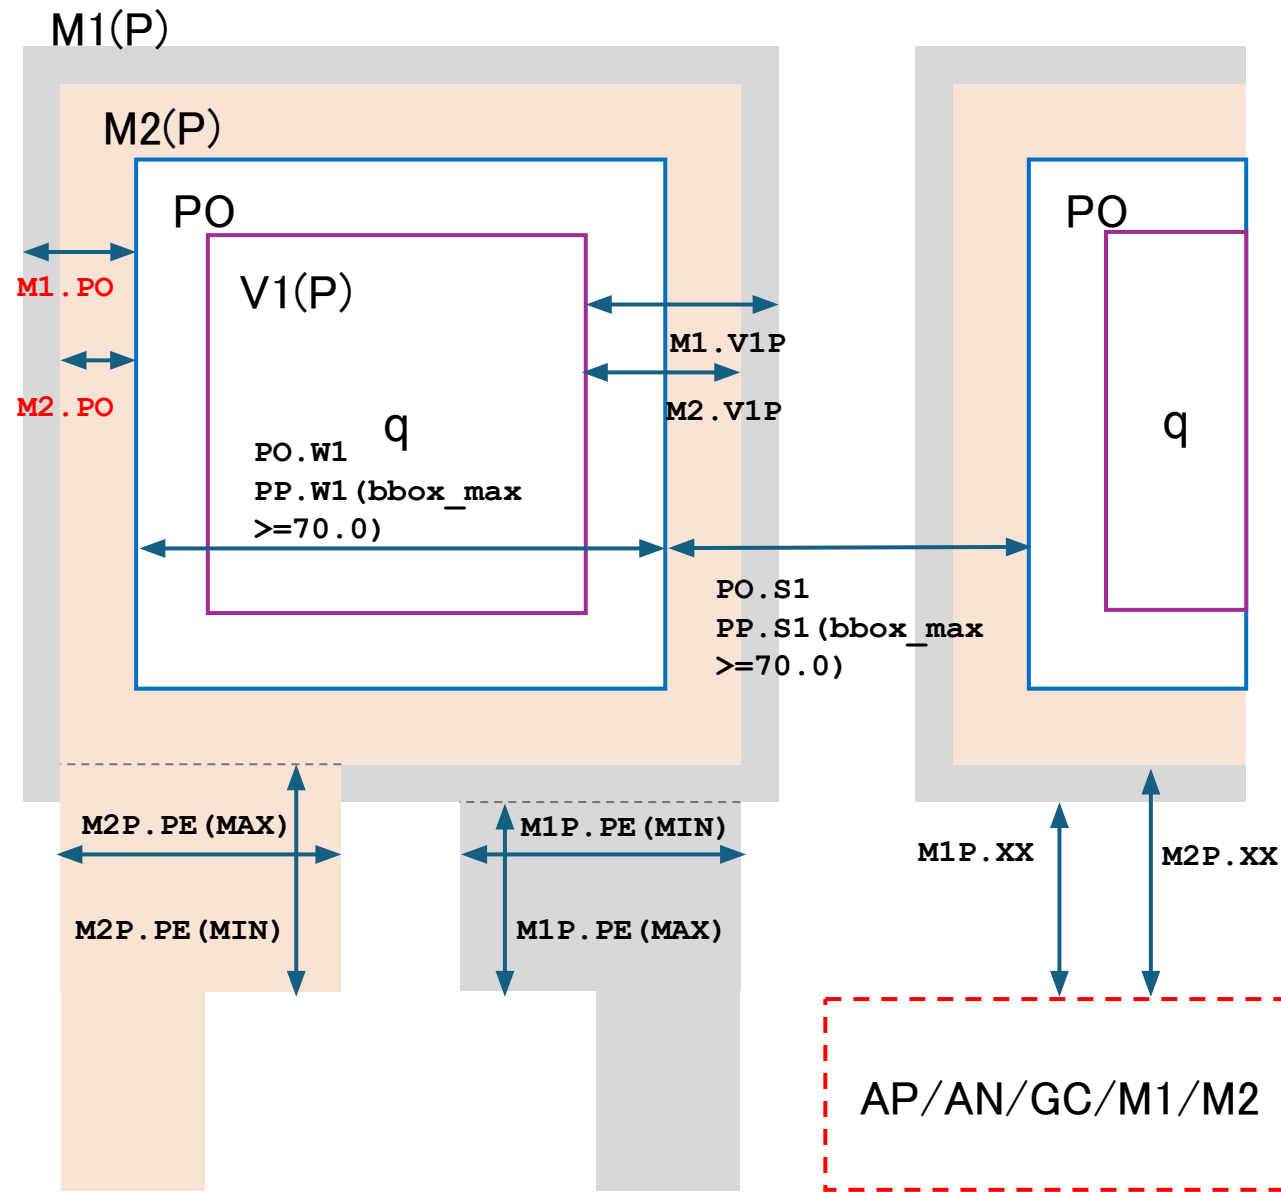

Rule	L1	L2	Func	MIN	MAX
PO.W1	PO		Rect	10.0	
PO.S1	PO	PO	Smin	20.0	
PP.W1	PP		Wmin	70.0	
PP.S1	PP	PP	Smin	64.0	
M1.PO	M1	PO	Fmin	5.0	
M2.PO	M2	PO	Fmin	5.0	
M1.V1P	M1	V1 (P)	Fmin	15.0	
M2.V1P	M2	V1 (P)	Fmin	15.0	
M1P.AA	M1 (P)	AA	Smin	14.0	
M2P.AA	M2 (P)	AA	Smin	14.0	
M1P.GA	M1 (P)	GA	Smin	14.0	
M2P.GA	M2 (P)	GA	Smin	14.0	
M1P.M1	M1 (P)	M1	Smin	14.0	
M2P.M2	M2 (P)	M2	Smin	14.0	
M1P.PE	M1 (P)	M1	Ext	14.0	40.0
M2P.PE	M2 (P)	M2	Ext	14.0	40.0
M2.PW	M2		EXTW	40.0	
M1.PW	M2		EXTW	40.0	

PP : PO for Pad (max dimension of the bbox>=70.0um)
M1 (P) : M1 covering PO
M2 (P) : M2 covering PO
V1 (P) : V1 through M1 (P) -M2 (P)


Design Rule control

DRC integrity

DRC

Document

PCell

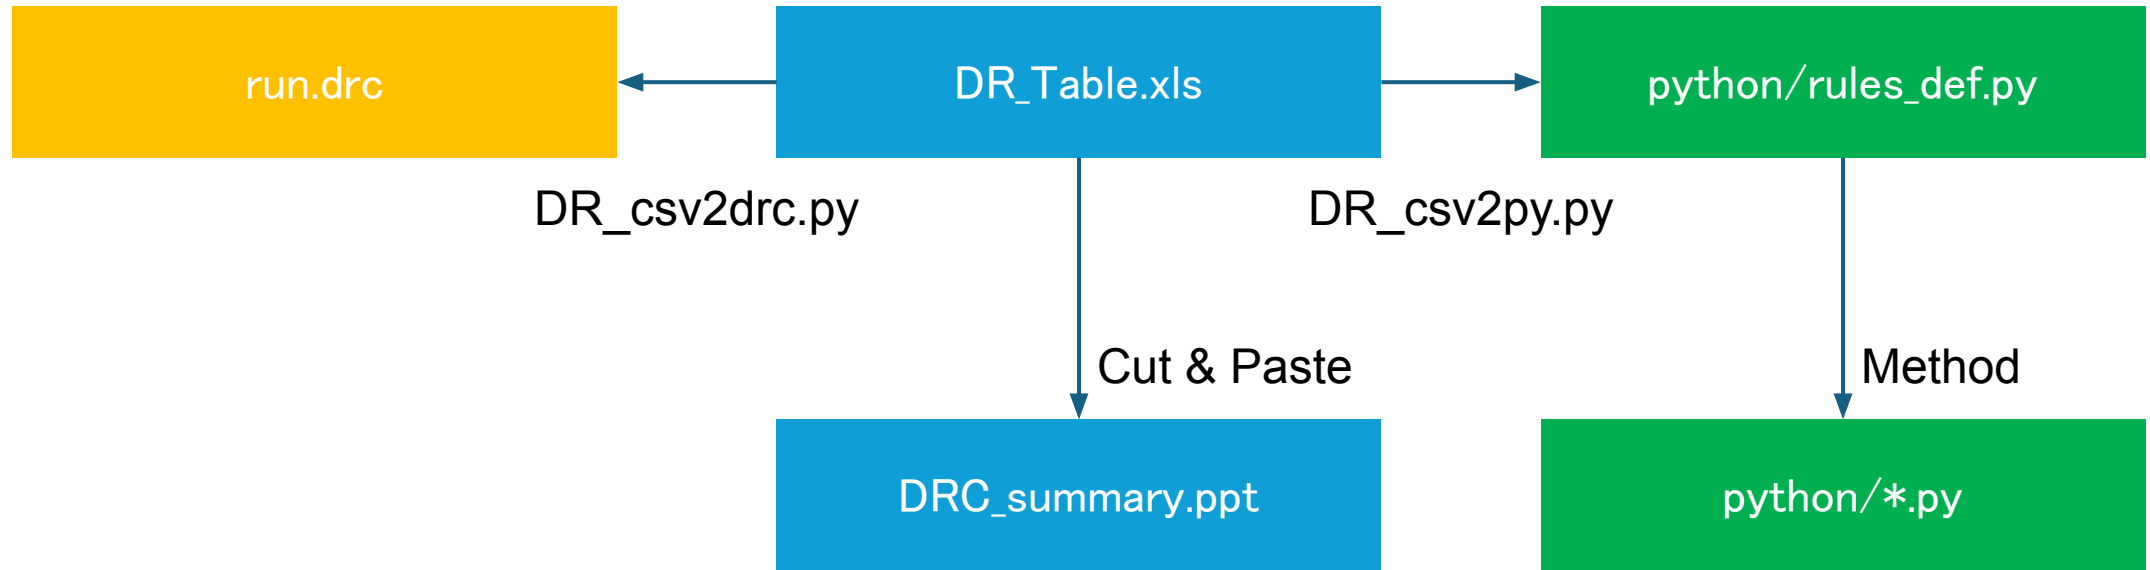


ALL Critical Dimension parameters are referenced by 'XX.YY' rule's name.

Design to Tapeout Process

Mask Data Preparation


Designer

local

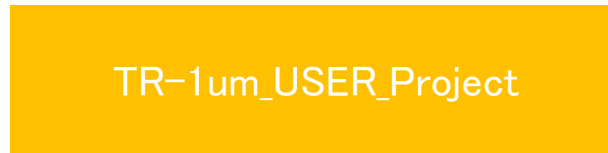


[push]

remote

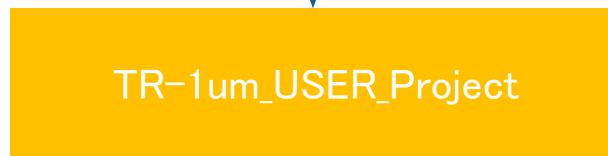

[action]
Precheck
DRC
MDP

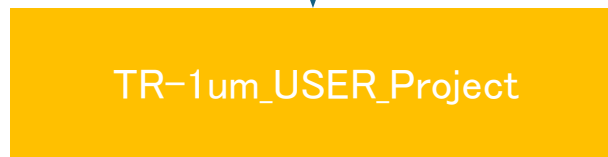

[clone]





[Import artifact]



[action]
Logo insertion
Aggregation
DRC



Tokai Rika

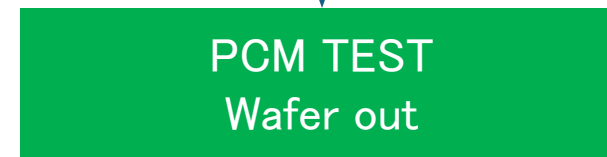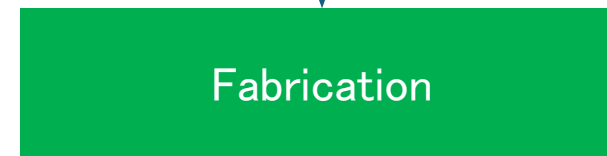

Download GDSII





Obsolete slides

2026/08/06






Reflected GitHub issues

<https://github.com/OpenSUSI/TR-1um/issues>

Cat-1: Prohibited

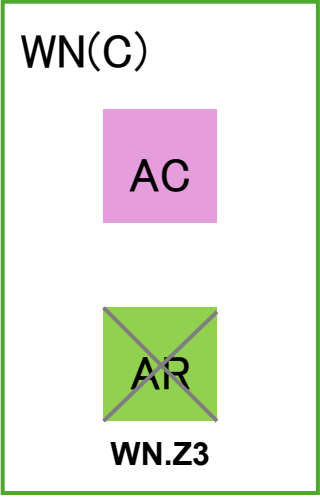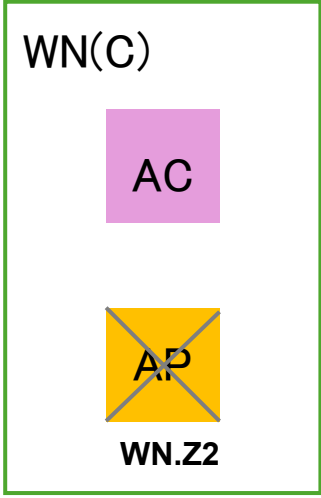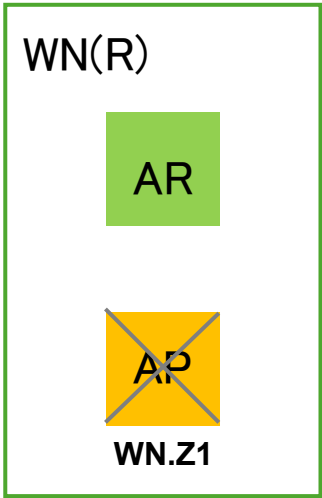

Rule	L1	L2	Func	MIN	MAX
WN.Z1	WN(R)	AP	Prohibit		
WN.Z2	WN(C)	AP	Prohibit		
WN.Z3	WN(C)	AR	Prohibit		
CO.Z1	CO	AA+GC+GR	Require		
CO.Z3	CO	M1	Require		
V1.Z1	V1	M1	Require		
V1.Z2	V1	M2	Require		
PO.Z1	PO	M1	Require		
PO.Z2	PO	M2	Require		
PO.Z3	PO	V1(P)	Contain		



Function:

Wmin/max: L1 Width min/max
Smin/max: L1 Space min/max (L1=L2)
Smin/max: L1 Separate L2 min/max
Emin/max: L1 Enclosed L2 min/max
Fmin/max: L1 Enclosing L2 min/max
Wfix: L1 Width equal
Sfix: Space equal
Nmin: L1 Notch min
Efix: Fixed enclosure
Donut: L1 Souuounded by L2
Prohibit: Must not overlap
Require: Must not be outside
Contain: Must contain
Rect: Must be a rectangle


AA : AP + AN + AC + AR

WN(R) : WN covering AR

WN(C) : WN covering AC

V1(P) : V1 interacting PO


Cat-2: WN to AP/AN/AR/AC related

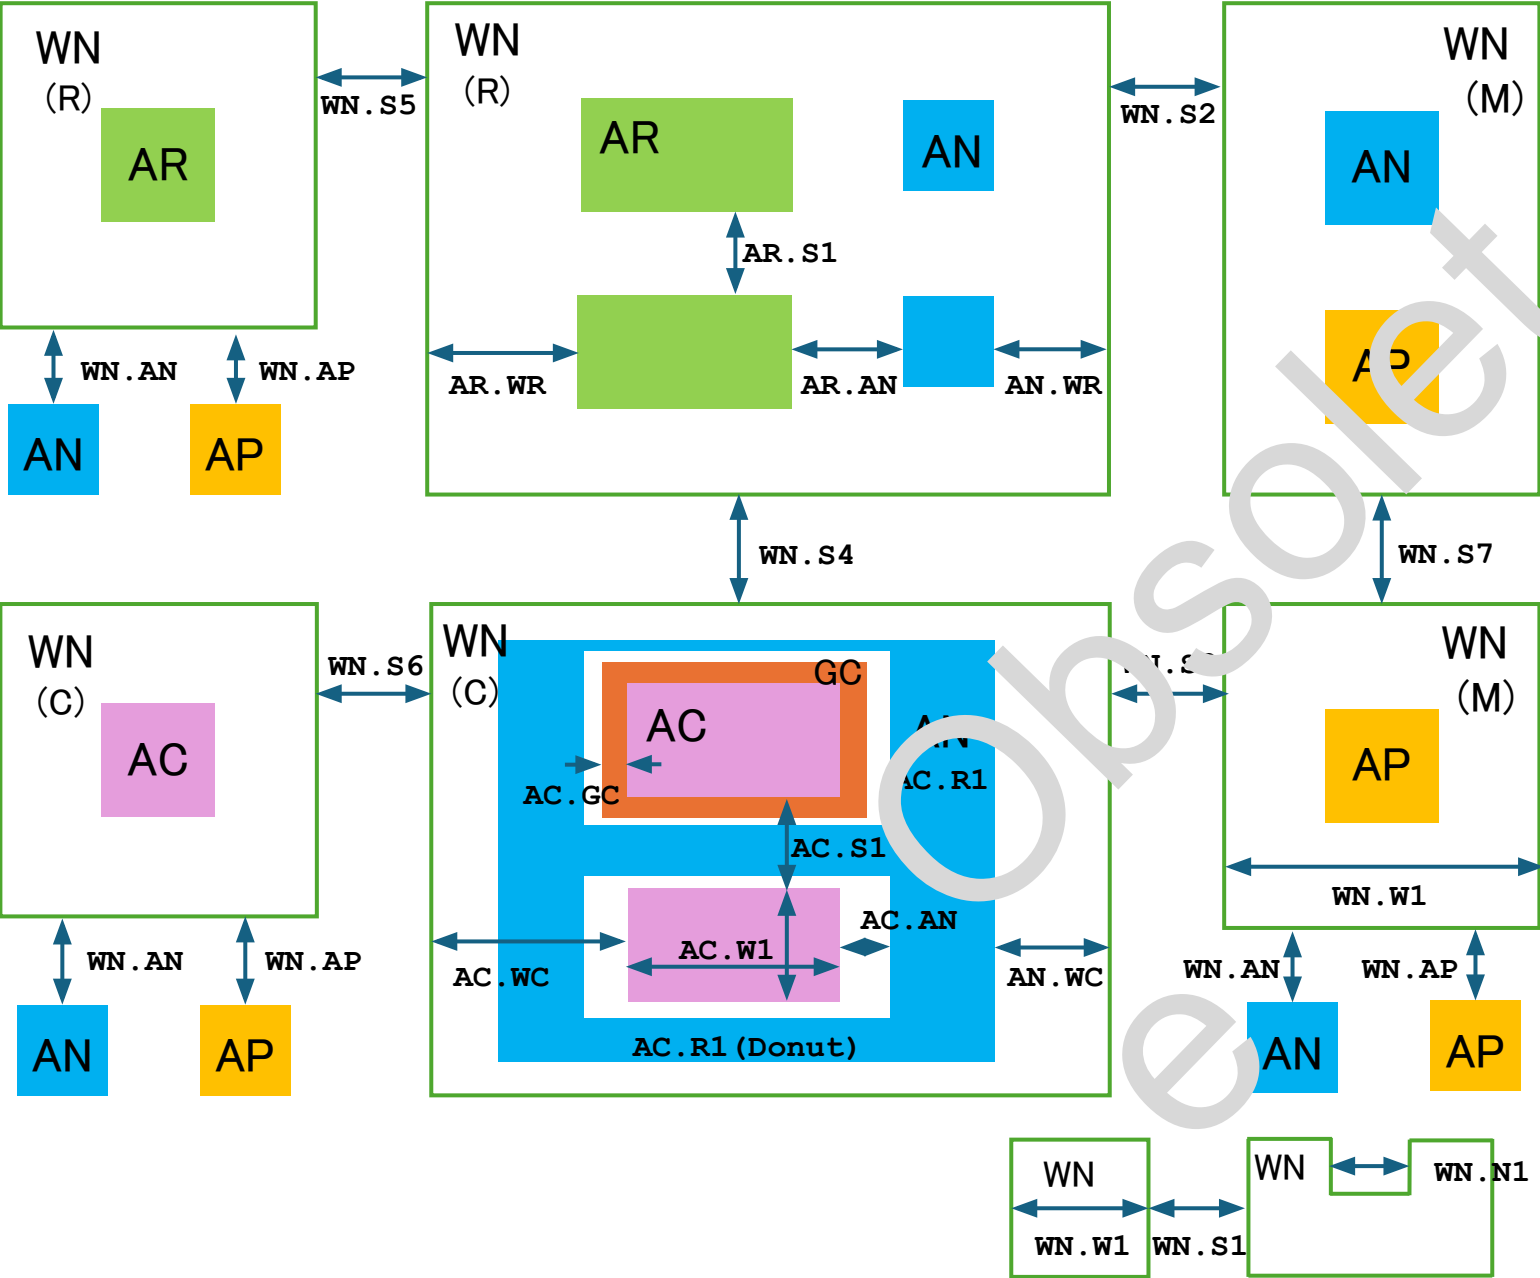

Rule	L1	L2	Func	MIN	MAX
WN.W1	WN		Wmin	8.0	
WN.S1	WN	WN	Smin	4.0	
WN.N1	WN	WN	Nmin	7.0	
WN.S2	WN (R)	WN (M)	Smin	9.5	
WN.S3	WN (C)	WN (M)	Smin	12.0	
WN.S4	WN (R)	WN (C)	Smin	9.5	
WN.S5	WN (R)	WN (R)	Smin	8.0	
WN.S6	WN (C)	WN (C)	Smin	12.0	
WN.S7	WN (M)	WN (M)	Smin	12.0	
WN.AP	WN	AP	Smin	5.0	
WN.AN	WN	AN	Smin	10.0	
AR.S1	AR	AR	Smin	4.0	
AR.WR	AR	WN (R)	Emin	10.0	
AN.WR	AN	WN (R)	Emin	5.0	
AR.AN	AR	AN	Smin	4.0	
AC.W1	AC		Rect	28.5	120.0
AC.S1	AC	AC	Smin	6.4	
AC.WC	AC	WN (C)	Emin	8.0	
AN.WC	AN	WN (C)	Emin	3.0	
AC.AN	AC	AN	Sfix	2.8	2.8
AC.GC	AC	GC	Efix	1.4	1.4
AC.R1	AC	AN (C)	Donut	0.0	

WN (R) : WN covering Resistor (AR)
WN (C) : WN covering Capacitor (AC)
WN (M) : WN covering MOS/Diode (AP)
AN (C) : AN ring for Capacitor WN (C)


Cat-3: MOS transistor related

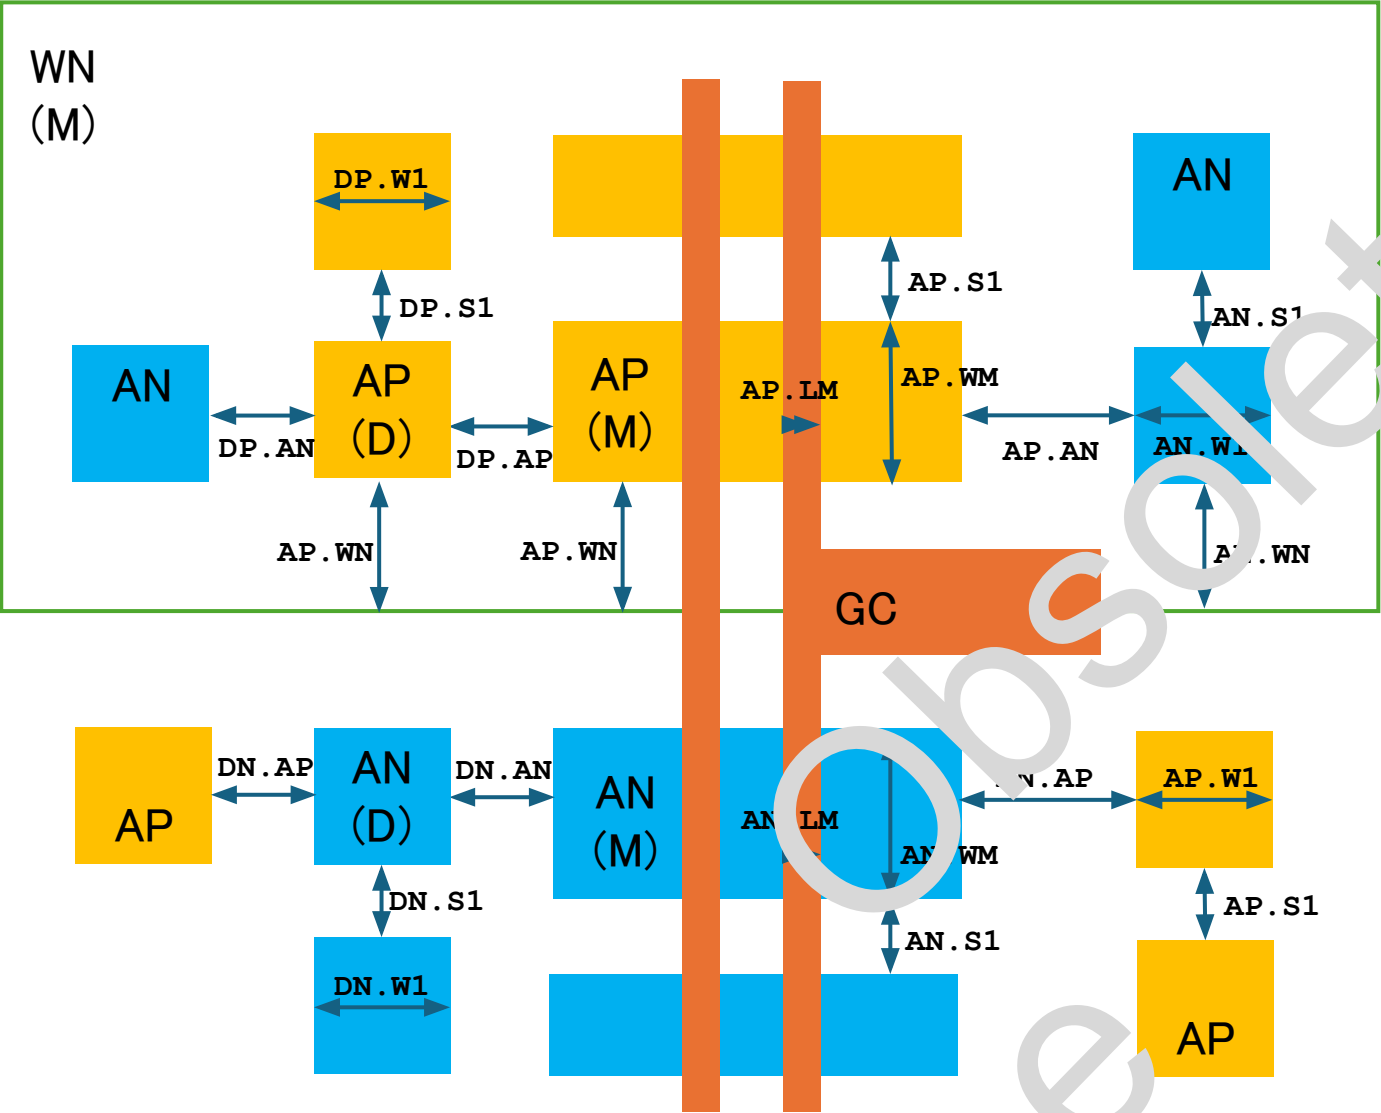

Rule	L1	L2	Func	MIN	MAX
AP.W1	AP		Wmin	1.4	
AP.S1	AP	AP	Smin	1.4	
AP.AN	AP	AN	Smin	2.8	
AP.WM	PMOS	AP-GC	Wmin/max	3.4	60.0
AP.LM	PMOS	GC-AP	Lmin/max	1.0	30.0
AP.WN	AP	WN	Emin	7.0	
DP.W1	DP		Wmin	3.6	
DP.S1	DP	DP	Smin	1.4	
DP.AP	DP	AP (M)	Smin	2.8	
DP.AN	DP	AN	Smin	2.8	
AN.W1	AN		Wmin	1.4	
AN.S1	AN	AN	Smin	1.4	
AN.AP	AN	AP	Smin	2.8	
AN.WM	NMOS	AN-GC	Wmin/max	3.4	60.0
AN.LM	NMOS	GC-AN	Lmin/max	1.0	30.0
AN.WN	AN	WN (M)	Emin	5.0	
DN.W1	DN		Wmin	3.6	
DN.S1	DN	DN	Smin	1.4	
DN.AP	DN	AP	Smin	2.8	
DN.AN	DN	AN (M)	Smin	2.8	

AP (M) / PMOS : AP for 5V PMOS
AN (M) / NMOS : AN for 5V NMOS
AP (D) / DP : AP for P-Diode
AN (D) / DN : AN for N-Diode
WN (M) : WN covering PMOS





Cat-4: Contact and Poly related

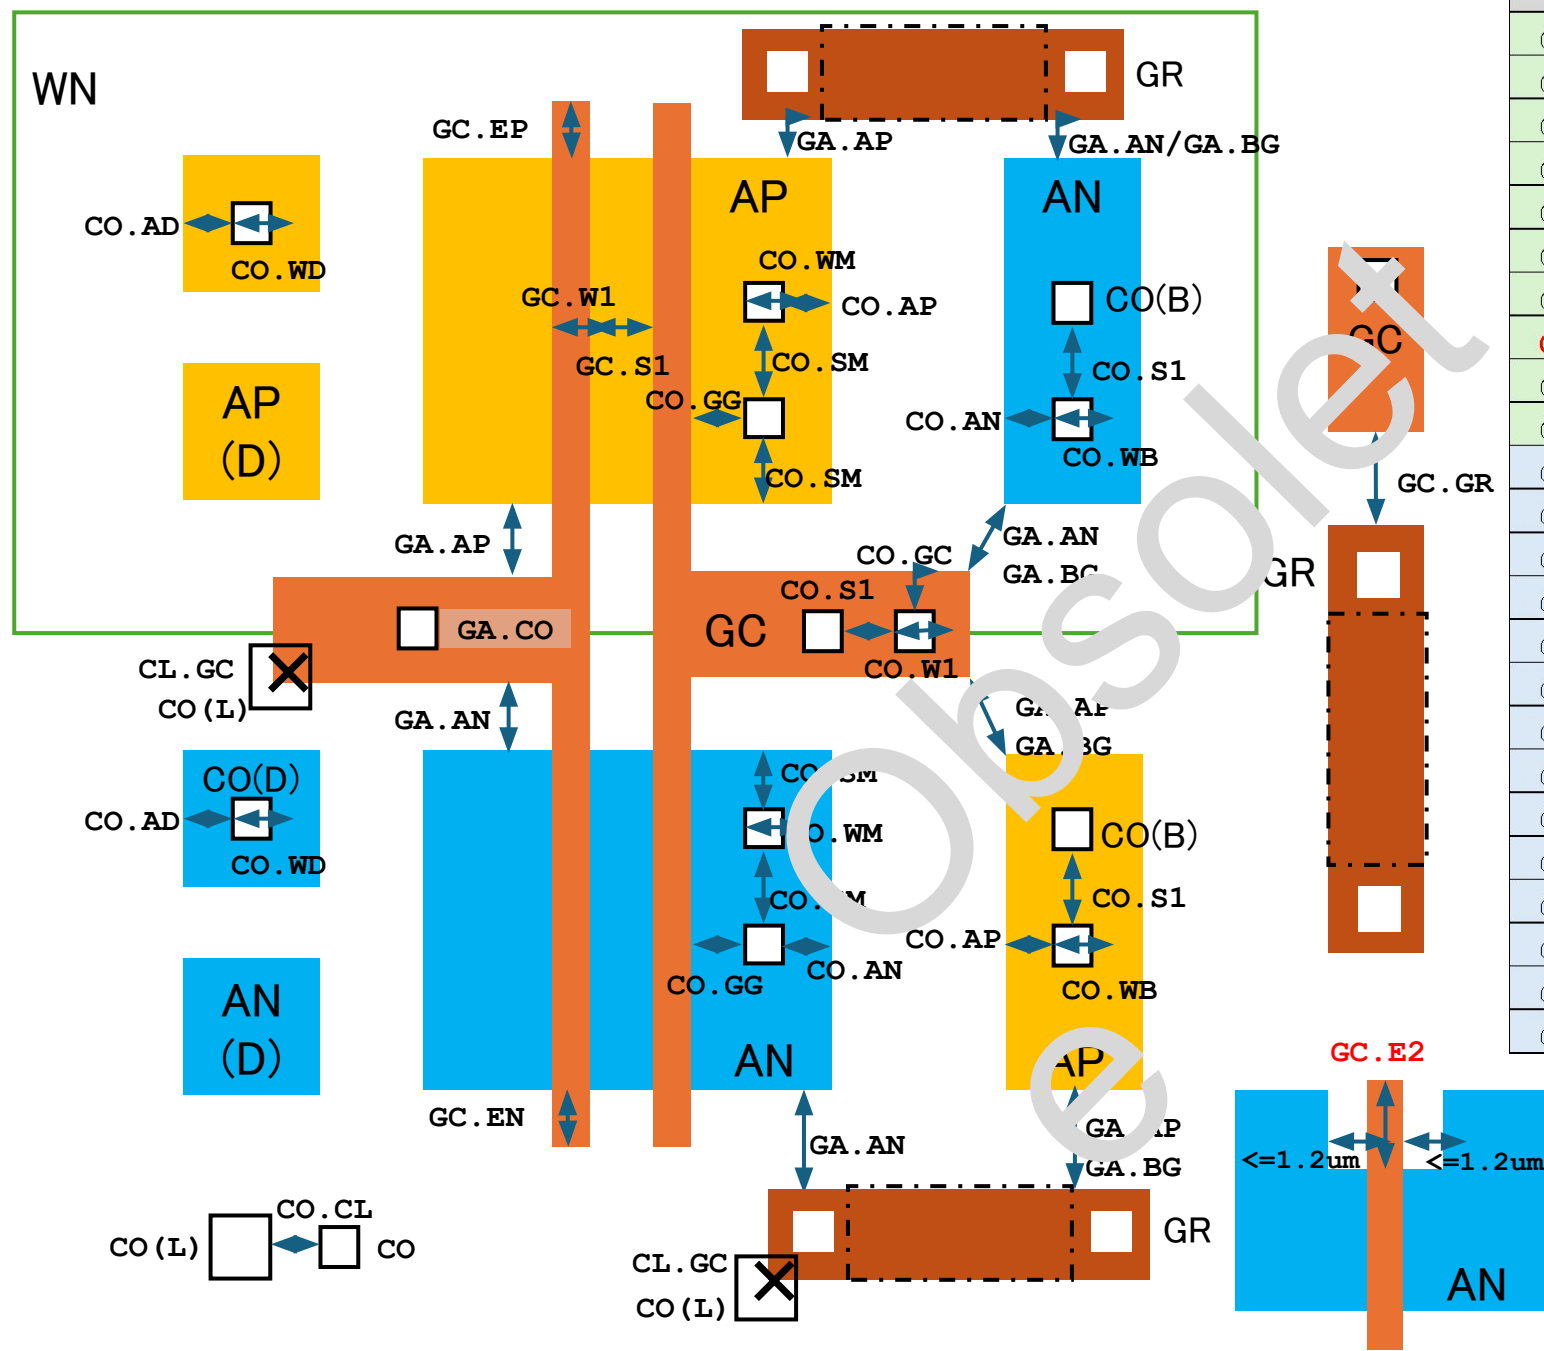

Rule	L1	L2	Func	MIN	MAX
GC.W1	GC		Wmin	1.0	
GC.S1	GC	GC	Smin	1.2	
GC.GR	GC	GR	Smin	1.2	
GA.AP	GA	AP	Smin	0.4	
GA.AN	GA	AN	Smin	0.4	
GC.EP	AP	GC	Emin	1.2	
GC.EN	AN	GC	Emin	1.2	
GC.E2	AM	GC	ECmin	2.4	
GA.BG	GA	BG	Prohibit		
GA.CO	GA	CO	Contain		
CO.W1	CO		Rect	1.0	97.0
CO.WM	CO (M)		Wfix	1.0	1.0
CO.WB	CO (B)		Wfix	1.0	1.0
CO.S1	CO	CO	Smin	1.0	
CO.CL	CO (L)	CO	Smin	1.6	
CO.SM	CO (M)	CO (M)	Sfix	1.0	1.0
CO.WD	CO (D)		Wfix	1.2	1.2
CO.SD	CO (D)	CO	Smin	1.2	
CO.AD	CO (D)	AP+AN	Emin	1.2	
CO.AP	CO	AP	Emin	0.8	
CO.AN	CO	AN	Emin	0.8	
CL.GC	CO (L)	GC+GR	Prohibit		
CO.GG	CO (M)	GC	Sfix	1.0	1.0
CO.GC	CO	GC+GR	Emin	0.8	

GA : GC/GR (all Poly)
 BG : AP/AN for MOS Back-gate
 CO(M) : CO on PMOS/NMOS source/drain
 CO(B) : CO on BG
 CO(D) : CO on AP(D)/AN(D)
 CO(L) : CO (Area>=1.5um²)

Cat-5: Resistors(AR/GR) and Capacitor(AC) related

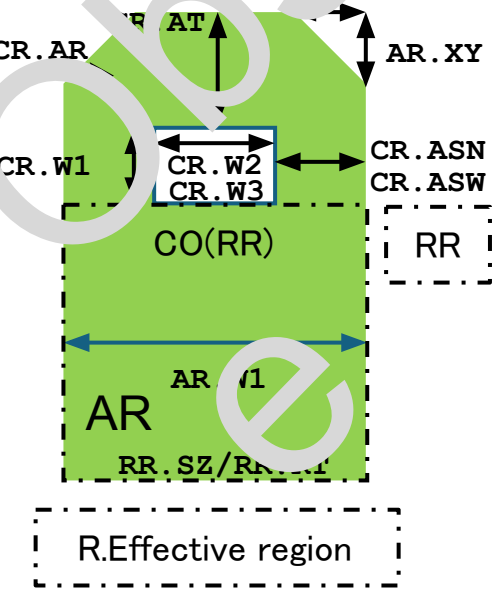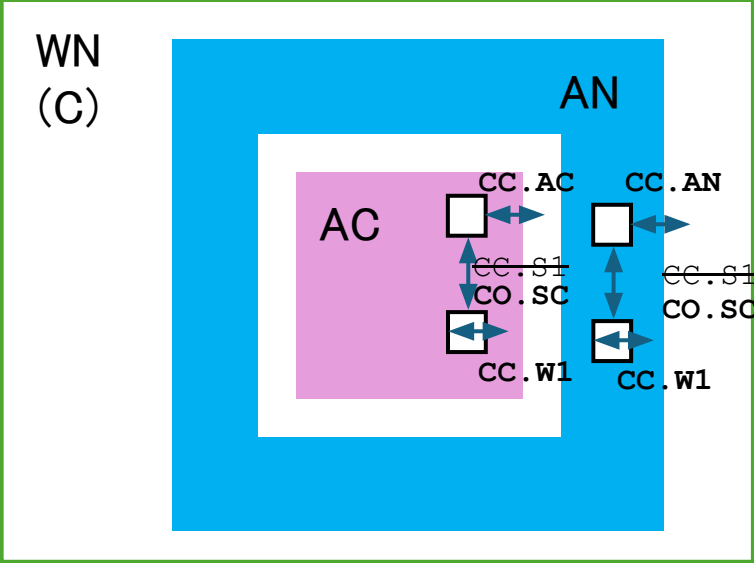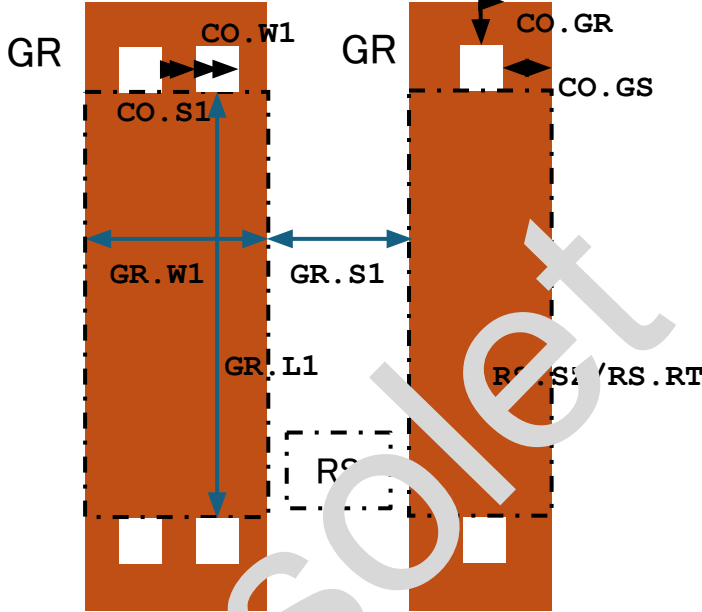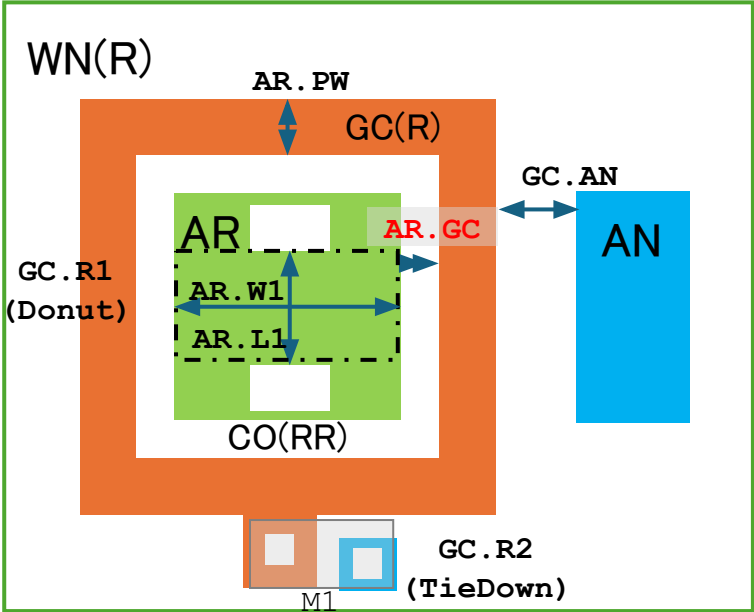

Rule	L1	L2	Func	MIN	MAX
AR.W1	RR	RR(W)	Wmin/max	2.8	20.0
AR.L1	RR	RR(L)	Lmin/max	13.0	100.0
RR.SZ	RR	RROK	Contain		
RR.RT	RR		Rect		
AR.GC	AR	GC	Sfix	1.0	
AR.PW	GC(R)		Wmin	2.0	
AR.XY	AR	Bevel	XYmin	1.0	
GC.AN	GC(R)	AN	Smin	???	???
GC.R1	AR	GC(R)	Donut	0.0	
GC.R2	GC(R)	WN(R)	TieDown	0.0	
GR.W1	RS	RS(W)	Wmin/max	4.0	20.0
GR.L1	RS	RS(L)	Lmin/max	20.0	100.0
RS.SZ	RS	RSOK	Require		
RS.RT	RS		Rect		
GR.S1	RS	RS	Smin	2.0	
CR.W1	CO(RR)		Wmin	1.0	
CR.W2	CO(RRW)		Lmin/max	1.6	17.6
CR.W3	CO(RRN)		Wfix	1.0	1.0
CR.AR	CO(RR)	AR	Emin	0.8	
CR.AT	CO(RR)	AR(T)	Emin	1.5	
CR.ASN	CO(RRN)	ARN(S)	Efix	0.9	
CR.ASW	CO(RRW)	ARW(S)	Efix	1.2	
CC.W1	CO(C)		Wfix	1.2	1.2
CC.S1	CO(C)	CO(C)	SFIX	1.2	1.2
CO.SC	CO(C)	CO	Smin	1.2	
CC.AC	CO(C)	AC	Emin	2.9	
CC.AN	CO(C)	AN	Emin	1.2	
CS.S1	CO(RS)	CO(RS)	SFIX	1.0	1.0
CO.GR	CO	GR	Emin	0.8	
CO.GS	CO(RSM)	GR(S)	Efix	1.5	1.5
CO.RT	CO(RSM)		Rect		

RR(W) : Width of AR effective

RR(L) : Length of AR effective

RROK : Allowed W=2.8,4,6,12,20

GC(R) : GC in WN(R)

RS(W) : Width of GR effective

RS(L) : Length of GR effective

RSOK : Allowed W=4,6,12,20

WC : WN interacting AC

AR(T) : AR top fringe

CO(RR) : CO on AR

CO(RRW) : CO on AR(W>=4.0)

CO(RRN) : CO on AR(W=2.8)

ARN(S) : AR side fringe (W=2.8)

ARW(S) : AR side fringe (W>=4.0)

CO(C) : CO on WC


CO(RS) : CO on GR

GR(S) : GR side fringe

CO(RSM) : CO(sized) & GR(S)

*Strike-through rules are not yet implemented


Cat-6: M1/V1/M2 related

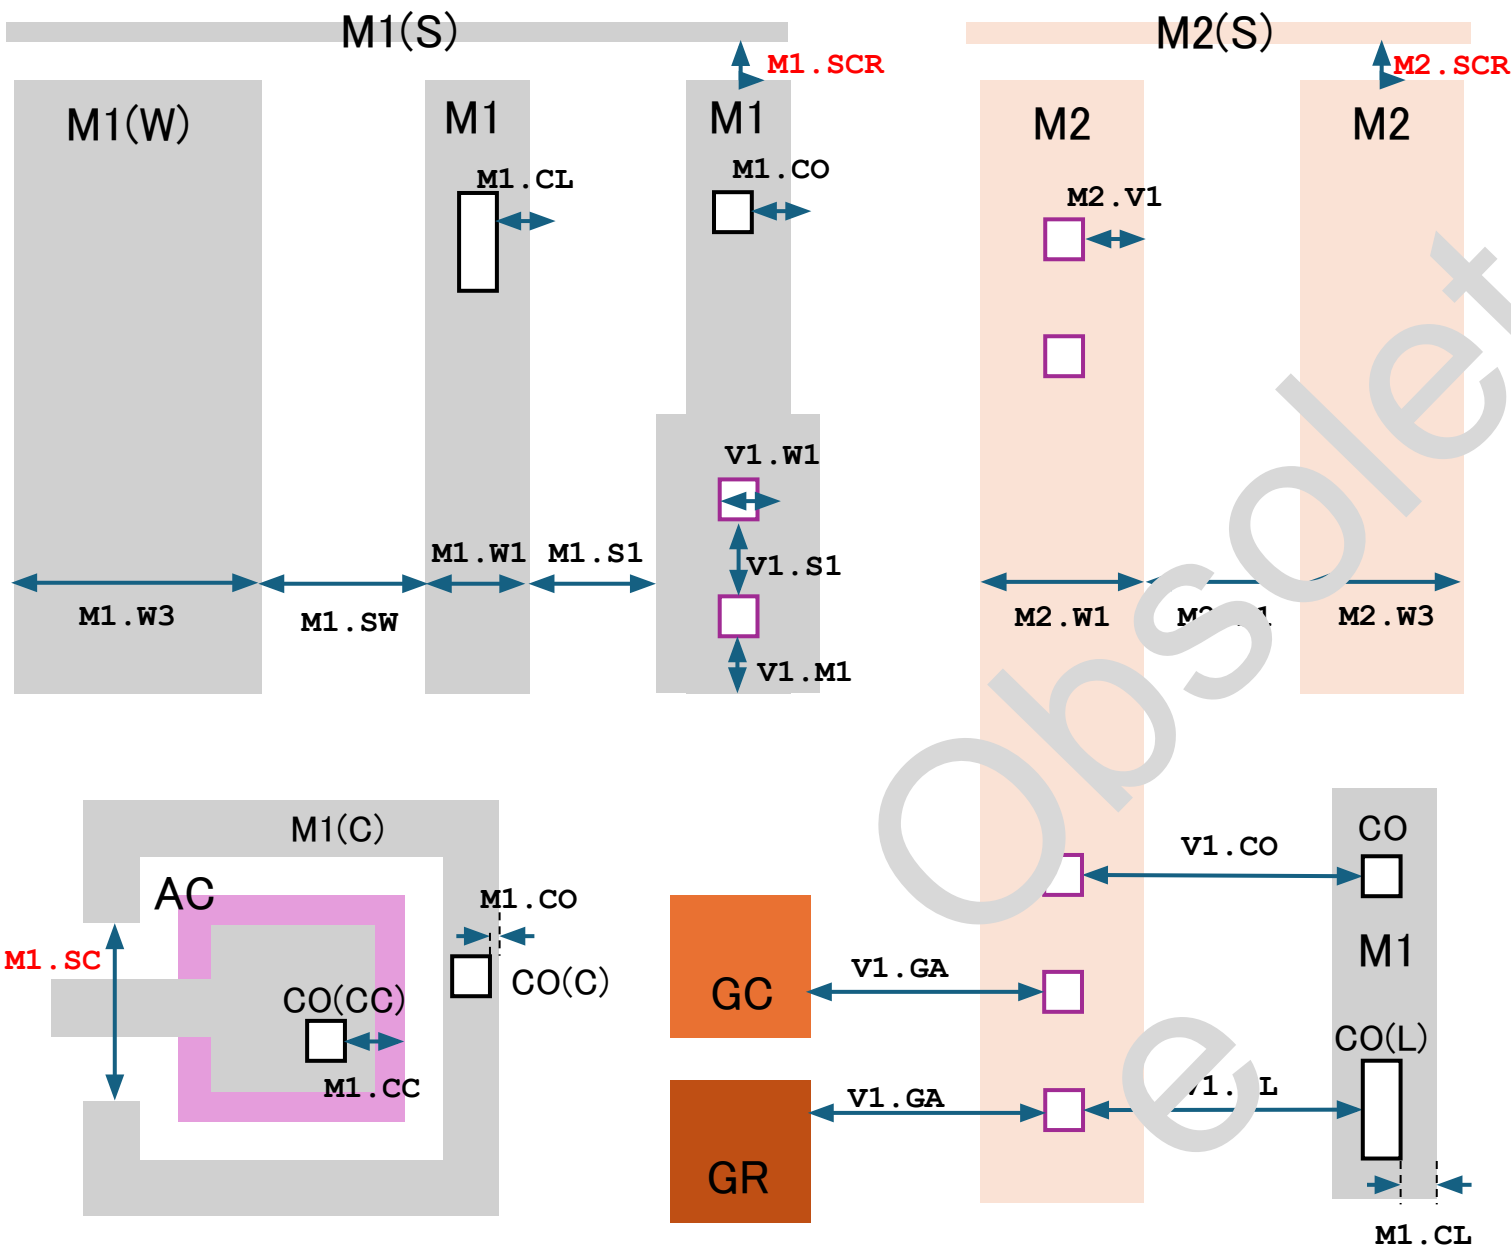

Rule	L1	L2	Func	MIN	MAX
M1.W1	M1		Wmin	1.8	
M1.W2	M1 (W)		WMIN	10.0	
M1.W3	M1 (I)		Wmax		45.0
M1.S1	M1	M1	Smin	1.4	
M1.SC	ANC	M1C	Smin/Smax	10.0	10.0
M1.CO	M1	CO	Fmin	0.8	
M1.CC	M1	CO (CC)	Fmin	1.3	
M1.CL	M1	CO (L)	Fmin	1.2	
M1.SW	M1 (W)	M1	Smin	2.0	
V1.W1	V1		Wfix	1.4	1.4
V1.S1	V1	V1	Smin	1.5	
V1.M1	V1	M1	Emin	1.0	
V1.GA	V1	GA	Smin	1.2	
V1.CO	V1	CO	Smin	1.0	
V1.CL	V1	CO (L)	Smin	1.4	
M2.W1	M2		Wmin	3.0	
M2.W3	M2 (I)		Wmax		45.0
M2.S1	M2	M2	Smin	2.0	
M2.V1	M2	V1	Fmin	1.0	
M1.SCR	M1 (S)	M1	Smin	5.0	
M2.SCR	M2 (S)	M2	Smin	5.0	

GA	: GC/GR(all poly)
M1(W)	: Wide M1 (W>10.0um)
M1(I)	: M1 outside Pad/Capacitor
M2(I)	: M2 outside Pad/Capacitor
M1(C)/M1C	: M1 ring for Capacitor WN
M1(S)	: M1 in scribe ring
M2(S)	: M2 in scribe ring
CO(C)	: CO on M1(C) (W=1.2um)
CO(CC)	: CO on AC (W=1.2um)
CO(L)	: CO large contact (Area>=1.5um ²)

Cat-7: ESD MOS transistor related

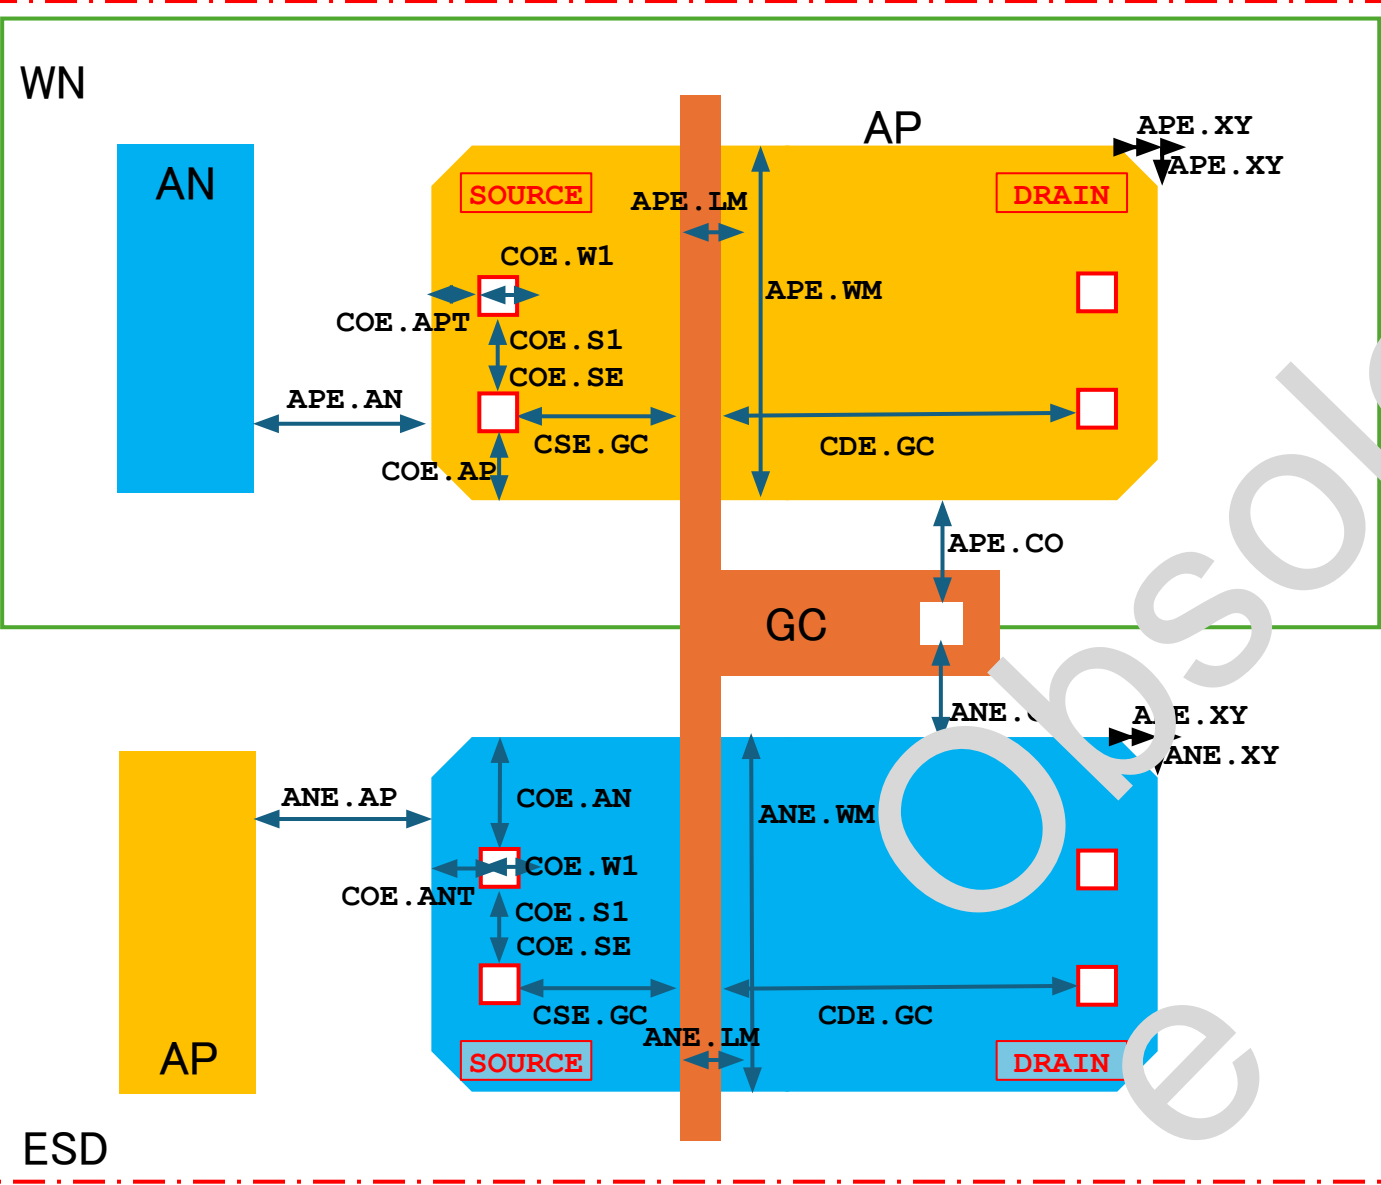


Rule	L1	L2	Func	MIN	MAX
APE.WM	PMOSE	APE-GC	Wmin/max	11.0	60.0
APE.LM	PMOSE	GC-APE	Lmin/max	2.0	30.0
APE.AN	APE	AN	Smin	10.0	
APE.XY	APE	Bevel	XYmin	1.4	
APE.CO	APE	CO	Smin	2.0	
ANE.WM	NMOSE	ANE-GC	Wmin/max	11.0	60.0
ANE.LM	NMOSE	GC-ANE	Lmin/max	2.0	30.0
ANE.AP	ANE	AP	Smin	10.0	
ANE.XY	ANE	Bevel	XYmin	1.4	
ANE.CO	ANE	CO	Smin	2.0	
COE.W1	CO(E)		Wfix	3.0	3.0
COE.S1	CO(E)	CO	Smin	1.6	
COE.SE	CO(E)	CO(E)	Sfix	1.6	1.6
CDE.GC	CD(E)	GC	Sfix	7.0	
CSE.GC	CS(E)	GC	Sfix	3.0	
COE.AP	CO(E)	AP	Emin	2.5	
COE.AN	CO(E)	AN	Emin	2.5	
COE.APT	CO(E)	AP(T)	Emin	4.0	
COE.ANT	CO(E)	AN(T)	Emin	4.0	

MPE : AP for ESD PMOS
MNE : AN for ESD NMOS
PMOSE : ESD PMOS Gate
NMOSE : ESD NMOS Gate
APE : MPE
ANE : MNE
AP(T) : AP Side Edges
AN(T) : AN Side Edges

CO(E) : CO on ESD
CD(E) : CO on ESD/Drain
CS(E) : CO on ESD/Source

Cat-8: PAD related

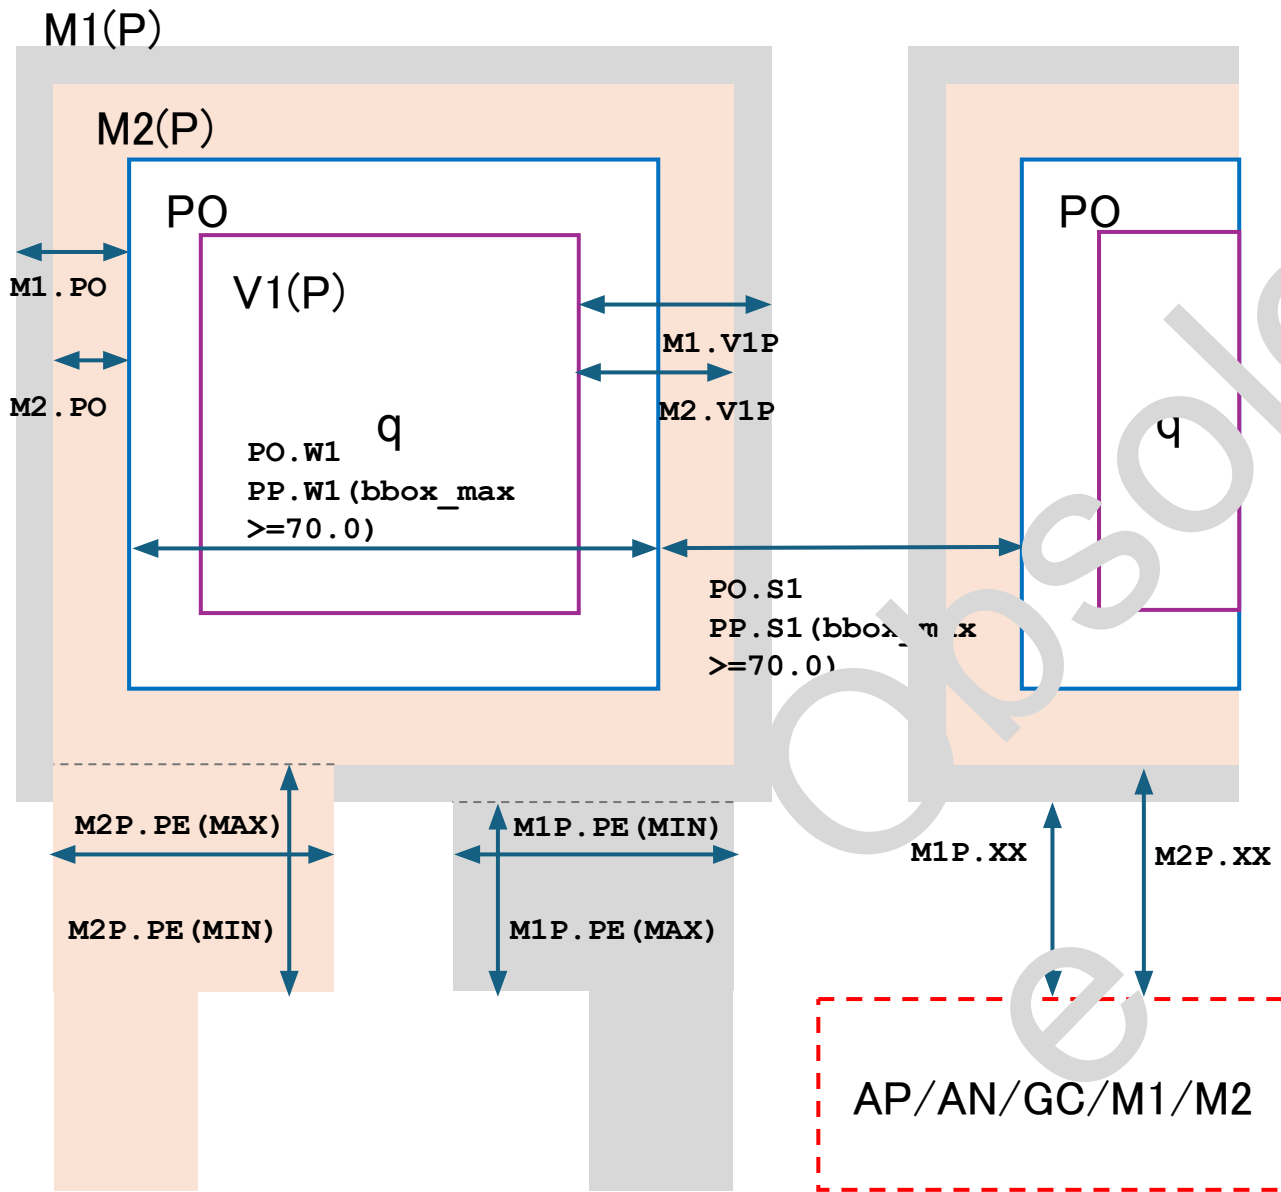

Rule	L1	L2	Func	MIN	MAX
PO.W1	PO		Rect	10.0	
PO.S1	PO	PO	Smin	20.0	
PP.W1	PP		Wmin	70.0	
PP.S1	PP	PP	Smin	64.0	
M1.PO	M1	PO	Fmin	5.0	
M2.PE	M2	PO	Fmin	5.0	
M1.V1P	M1	V1(P)	Fmin	15.0	
M2.V1P	M2	V1(P)	Fmin	15.0	
M1P.AA	M1(P)	AA	Smin	14.0	
M2P.AA	M2(P)	AA	Smin	14.0	
M1P.GA	M1(P)	GA	Smin	14.0	
M2P.GA	M2(P)	GA	Smin	14.0	
M1P.M1	M1(P)	M1	Smin	14.0	
M2P.M2	M2(P)	M2	Smin	14.0	
M1P.PE	M1(P)	M1	Ext	14.0	40.0
M2P.PE	M2(P)	M2	Ext	14.0	40.0
M2.PW	M2		EXTW	40.0	
M1.PW	M2		EXTW	40.0	

PP : PO for Pad (max dimension of the bbox>=70.0um)
M1(P) : M1 covering PO
M2(P) : M2 covering PO
V1(P) : V1 through M1(P)-M2(P)





Obsolete slides

2026/07/31






Reflected GitHub issues

<https://github.com/OpenSUSI/TR-1um/issues>

Cat-1: Prohibited

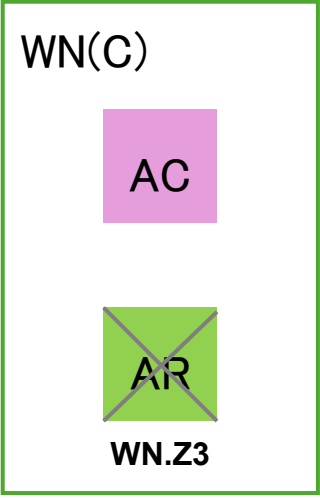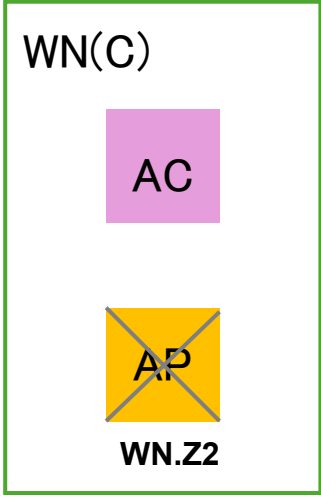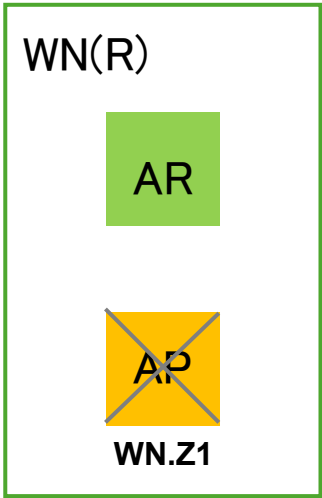

Rule	L1	L2	Func	MIN	MAX
WN.Z1	WN(R)	AP	Prohibit		
WN.Z2	WN(C)	AP	Prohibit		
WN.Z3	WN(C)	AR	Prohibit		
CO.Z1	CO	AA+GC+GR	Require		
CO.Z3	CO	M1	Require		
V1.Z1	V1	M1	Require		
V1.Z2	V1	M2	Require		
PO.Z1	PO	M1	Require		
PO.Z2	PO	M2	Require		
PO.Z3	PO	V1(P)	Contain		



Function:

Wmin/max: L1 Width min/max
Smin/max: L1 Space min/max (L1=L2)
Smin/max: L1 Separate L2 min/max
Emin/max: L1 Enclosed L2 min/max
Fmin/max: L1 Enclosing L2 min/max
Wfix: L1 Width equal
Sfix: Space equal
Nmin: L1 Notch min
Efix: Fixed enclosure
Donut: L1 Souuounded by L2
Prohibit: Must not overlap
Require: Must not be outside
Contain: Must contain
Rect: Must be a rectangle


AA : AP + AN + AC + AR

WN(R) : WN covering AR

WN(C) : WN covering AC

V1(P) : V1 interacting PO


Cat-2: WN to AP/AN/AR/AC related

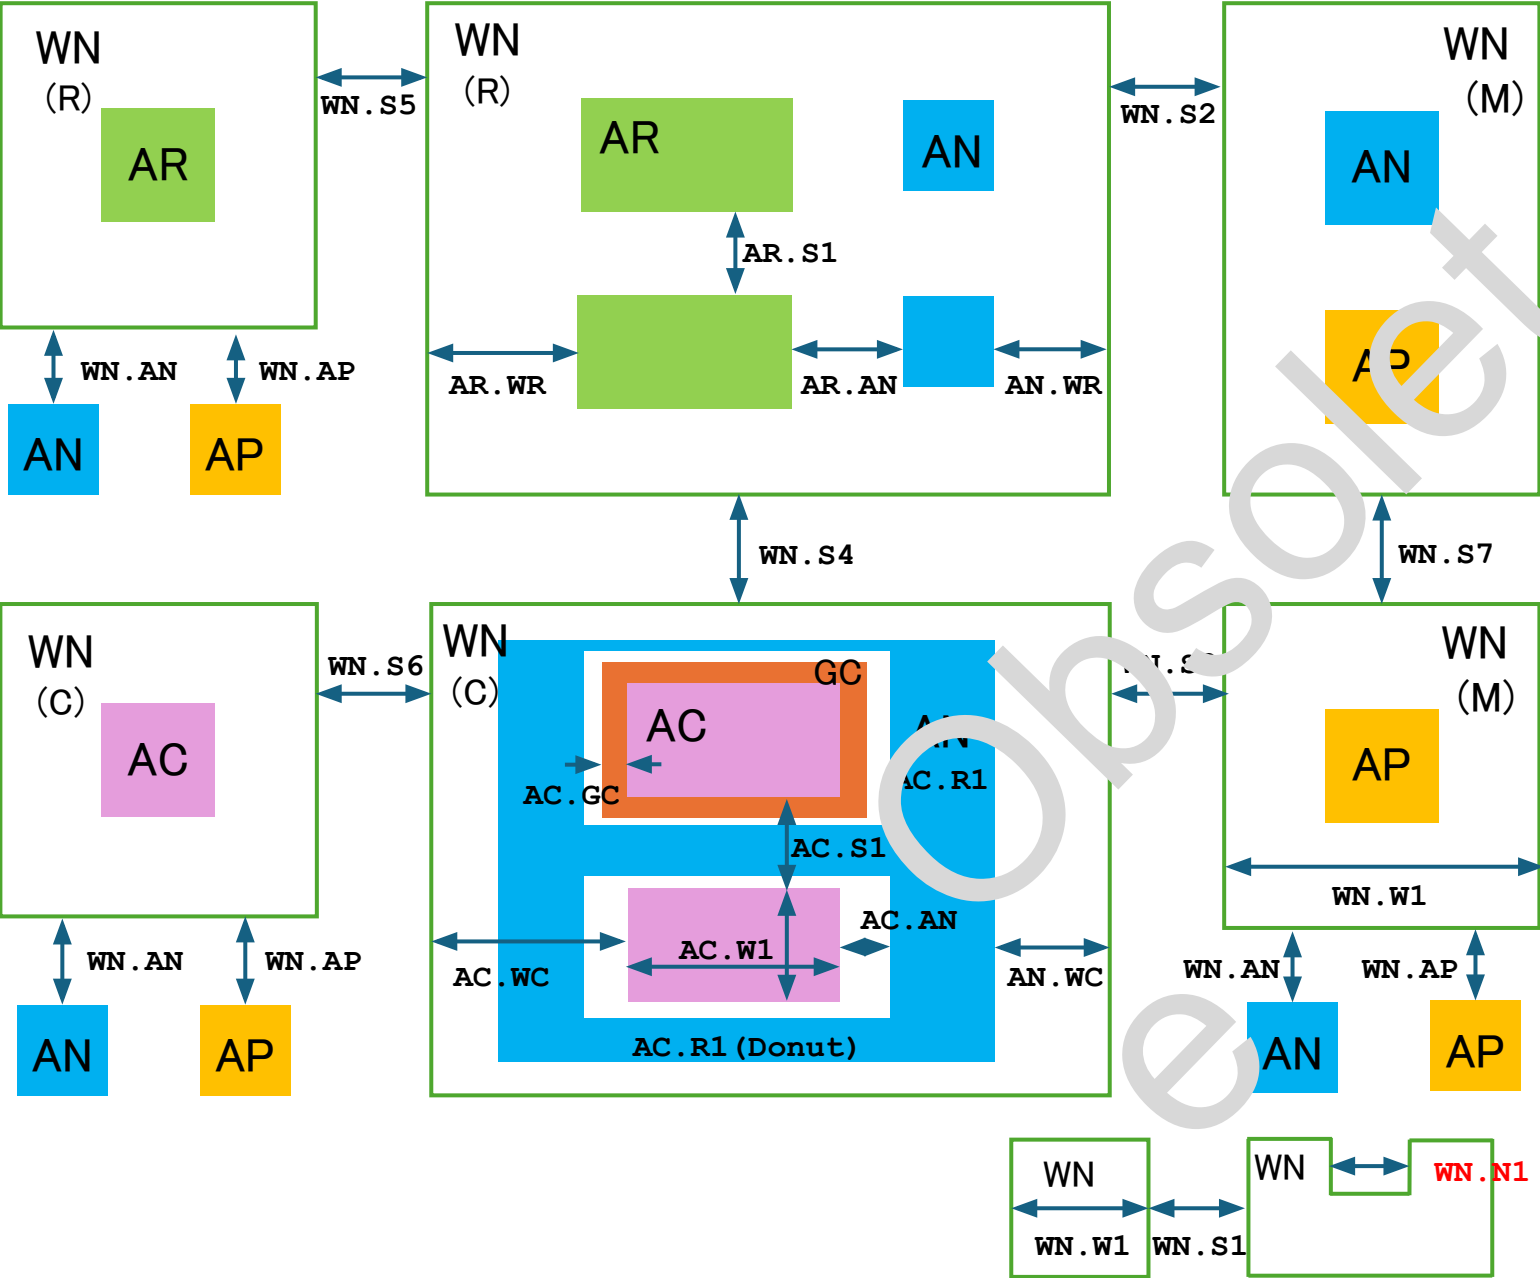

Rule	L1	L2	Func	MIN	MAX
WN.W1	WN		Wmin	8.0	
WN.S1	WN	WN	Smin	4.0	
WN.N1	WN	WN	Nmin	7.0	
WN.S2	WN (R)	WN (M)	Smin	9.5	
WN.S3	WN (C)	WN (M)	Smin	12.0	
WN.S4	WN (R)	WN (C)	Smin	9.5	
WN.S5	WN (R)	WN (R)	Smin	8.0	
WN.S6	WN (C)	WN (C)	Smin	12.0	
WN.S7	WN (M)	WN (M)	Smin	12.0	
WN.AP	WN	AP	Smin	5.0	
WN.AN	WN	AN	Smin	10.0	
AR.S1	AR	AR	Smin	4.0	
AR.WR	AR	WN (R)	Emin	10.0	
AN.WR	AN	WN (R)	Emin	5.0	
AR.AN	AR	AN	Smin	4.0	
AC.W1	AC		Rect	28.5	120.0
AC.S1	AC	AC	Smin	6.4	
AC.WC	AC	WN (C)	Emin	8.0	
AN.WC	AN	WN (C)	Emin	3.0	
AC.AN	AC	AN	Sfix	2.8	2.8
AC.GC	AC	GC	Efix	1.4	1.4
AC.R1	AC	AN (C)	Donut	0.0	

WN (R) : WN covering Resistor (AR)
WN (C) : WN covering Capacitor (AC)
WN (M) : WN covering MOS/Diode (AP)
AN (C) : AN ring for Capacitor WN (C)

Cat-3: MOS transistor related

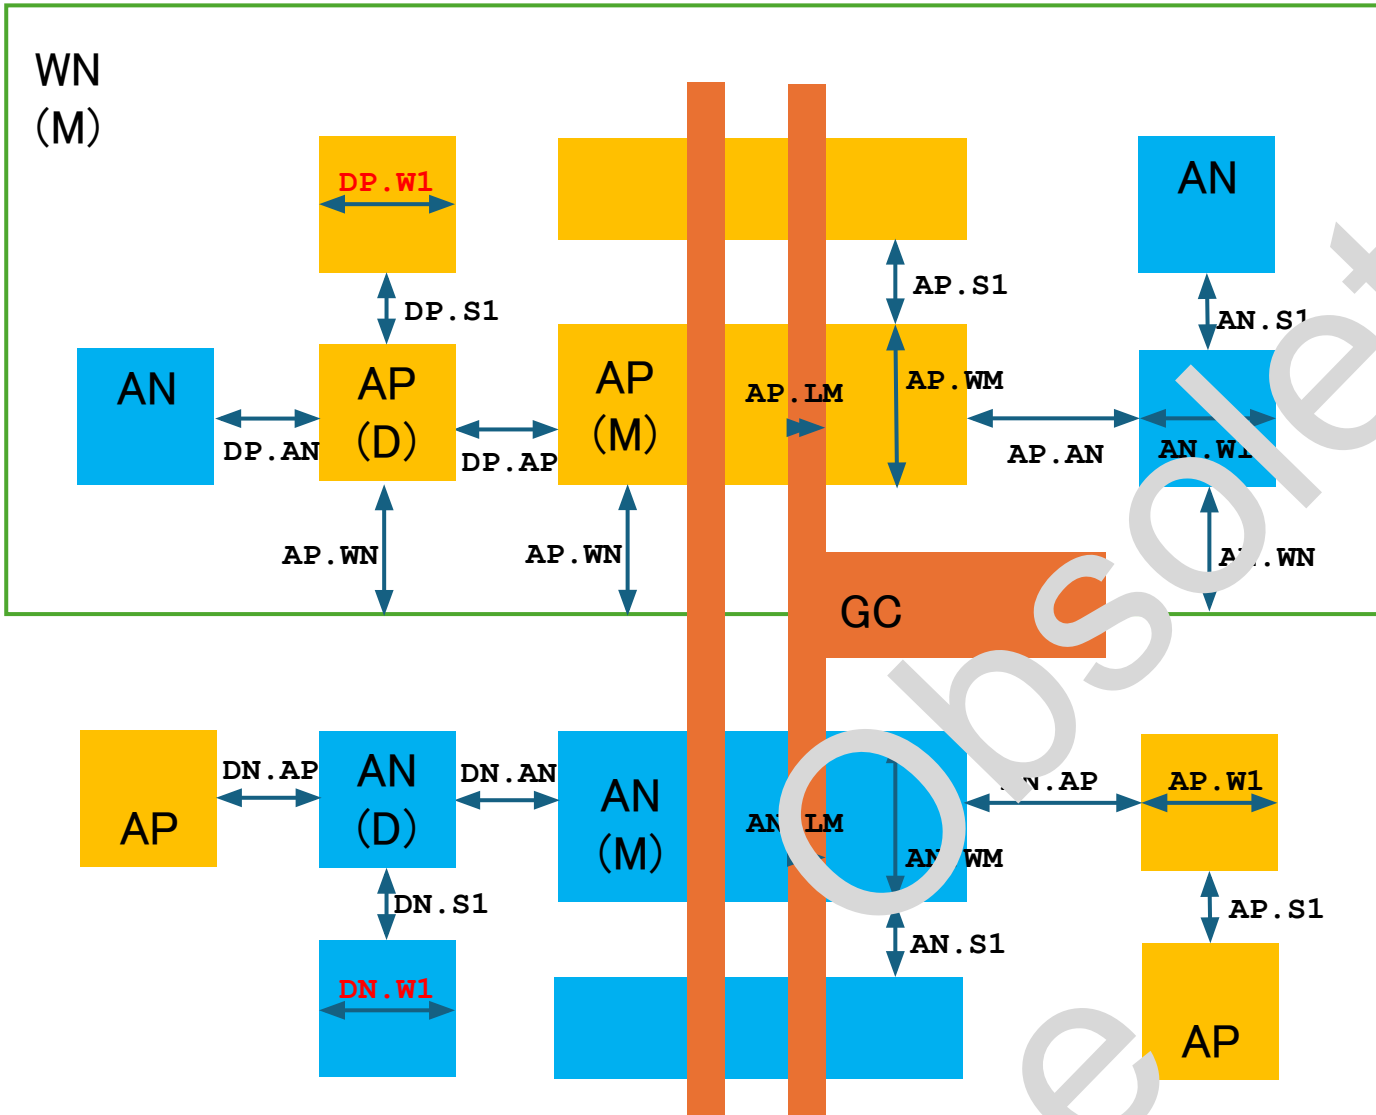


Rule	L1	L2	Func	MIN	MAX
AP.W1	AP		Wmin	1.4	
AP.S1	AP	AP	Smin	1.4	
AP.AN	AP	AN	Smin	2.8	
AP.WM	PMOS	AP-GC	Wmin/max	3.4	60.0
AP.LM	PMOS	GC-AP	Lmin/max	1.0	30.0
AP.WN	AP	WN	Emin	7.0	
DP.W1	DP		Wmin	3.6	
DP.S1	DP	DP	Smin	1.4	
DP.AP	DP	AP (M)	Smin	2.8	
DP.AN	DP	AN	Smin	2.8	
AN.W1	AN		Wmin	1.4	
AN.S1	AN	AN	Smin	1.4	
AN.AP	AN	AP	Smin	2.8	
AN.WM	NMOS	AN-GC	Wmin/max	3.4	60.0
AN.LM	NMOS	GC-AN	Lmin/max	1.0	30.0
AN.WN	AN	WN (M)	Emin	5.0	
DN.W1	DN		Wmin	3.6	
DN.S1	DN	DN	Smin	1.4	
DN.AP	DN	AP	Smin	2.8	
DN.AN	DN	AN (M)	Smin	2.8	

```

AP (M) /PMOS : AP for 5V PMOS
AN (M) /NMOS : AN for 5V NMOS
AP (D) /DP   : AP for P-Diode
AN (D) /DN   : AN for N-Diode
WN (M)       : WN covering PMOS

```






Cat-4: Contact and Poly related

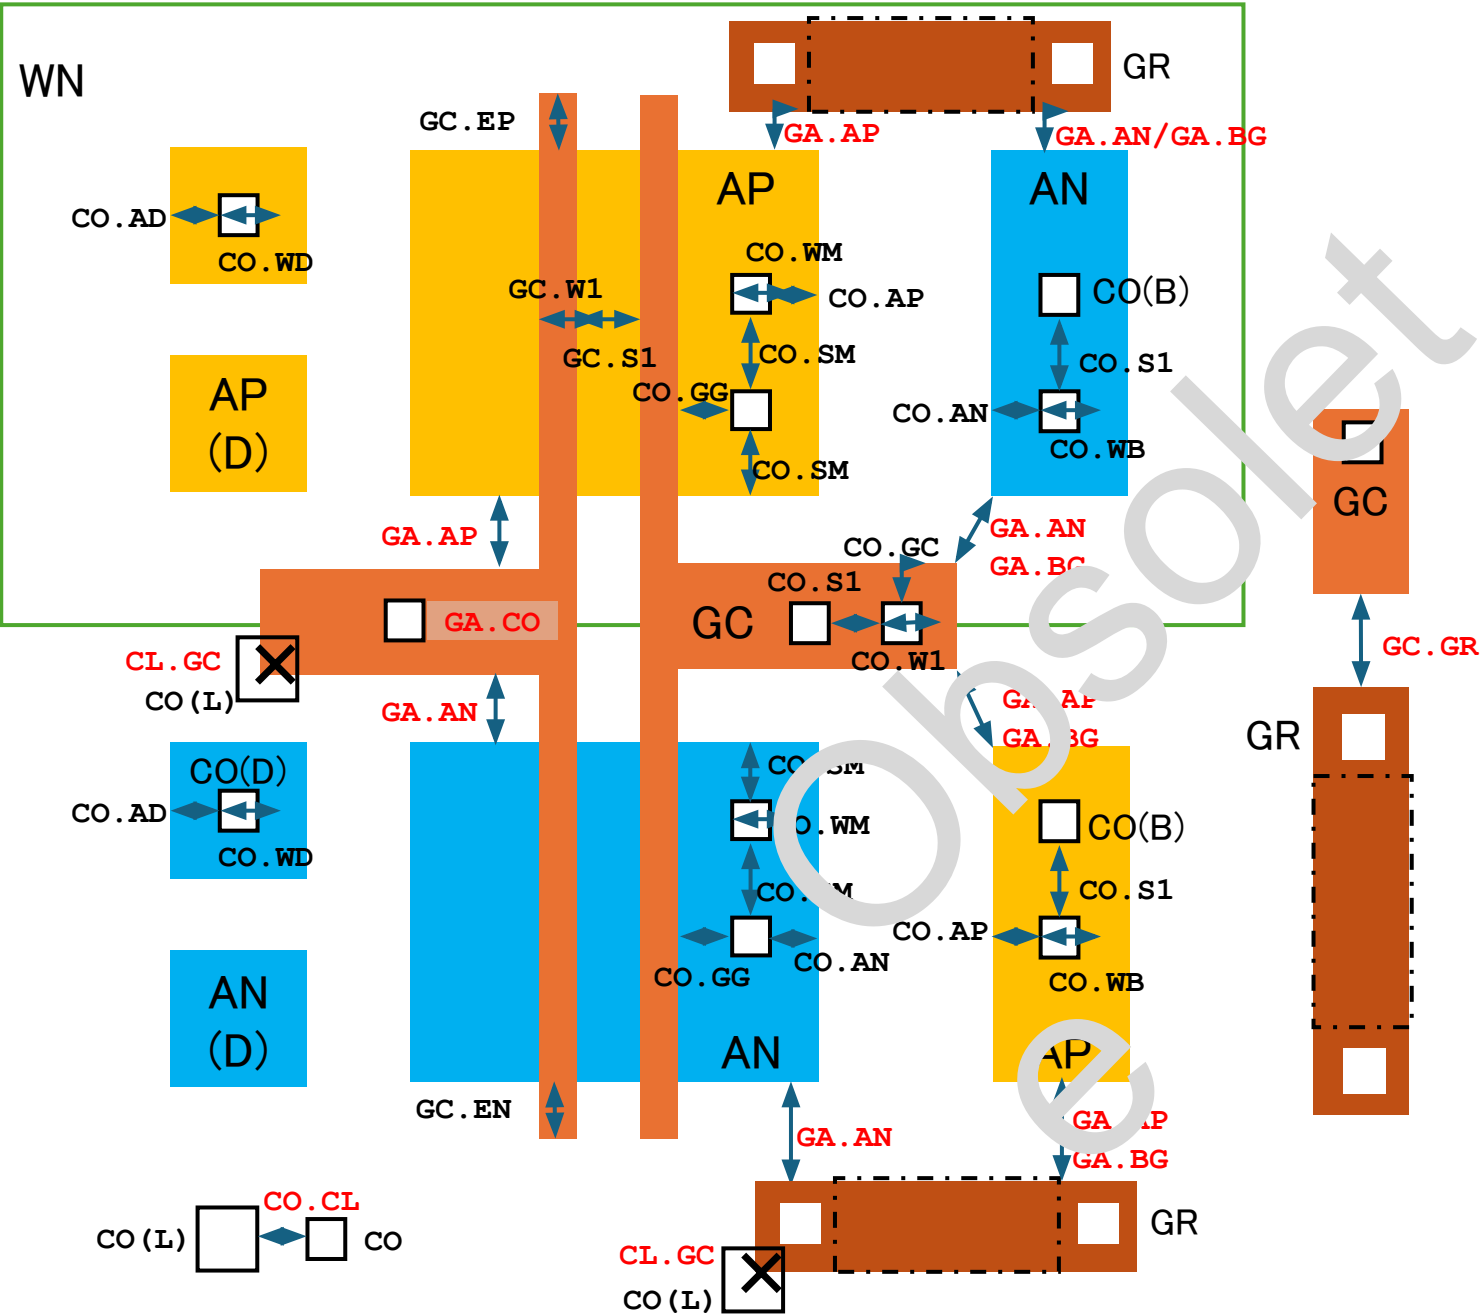

Rule	L1	L2	Func	MIN	MAX
GC.W1	GC		Wmin	1.0	
GC.S1	GC	GC	Smin	1.2	
GC.GR	GC	GR	Smin	1.2	
GA.AP	GA	AP	Smin	0.4	
GA.AN	GA	AN	Smin	0.4	
GC.EP	AP	GC	Emin	1.2	
GC.EN	AN	GC	Emin	1.2	
GA.BG	GA	BG	Prohibit		
GA.CO	GA	CO	Contain		
CO.W1	CO		Rect	1.0	97.0
CO.WM	CO(M)		Wfix	1.0	1.0
CO.WB	CO(B)		Wfix	1.0	1.0
CO.S1	CO	CO	Smin	1.0	
CO.CL	CO(L)	CO	Smin	1.6	
CO.SM	CO(M)	CO(M)	Sfix	1.0	1.0
CO.WD	CO(D)		Wfix	1.2	1.2
CO.SD	CO(D)	CO	Smin	1.2	
CO.AD	CO(D)	AP+AN	Emin	1.2	
CO.AP	CO	AP	Emin	0.8	
CO.AN	CO	AN	Emin	0.8	
CL.GC	CO(L)	GC+GR	Prohibit		
CO.GG	CO(M)	GC	Sfix	1.0	1.0
CO.GC	CO	GC+GR	Emin	0.8	

GA : GC/GR (all Poly)
BG : AP/AN for MOS Back-gate
CO(M) : CO on PMOS/NMOS source/drain
CO(B) : CO on BG
CO(D) : CO on AP(D) /AN(D)
CO(L) : CO (Area>=1.5um²)

Cat-5: Resistors(AR/GR) and Capacitor(AC) related

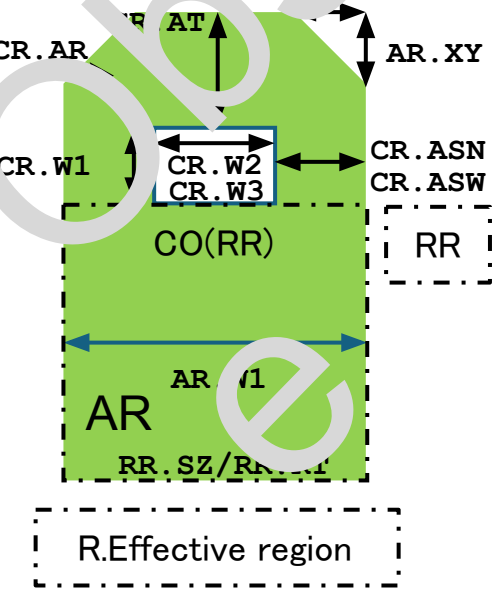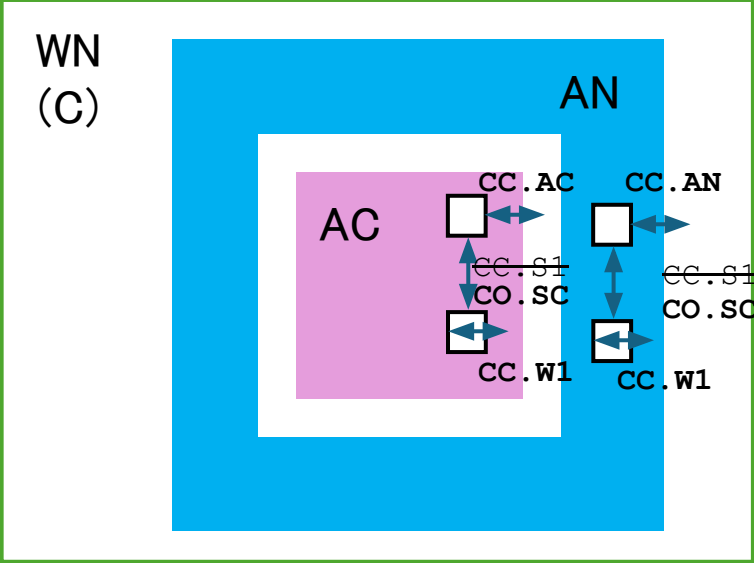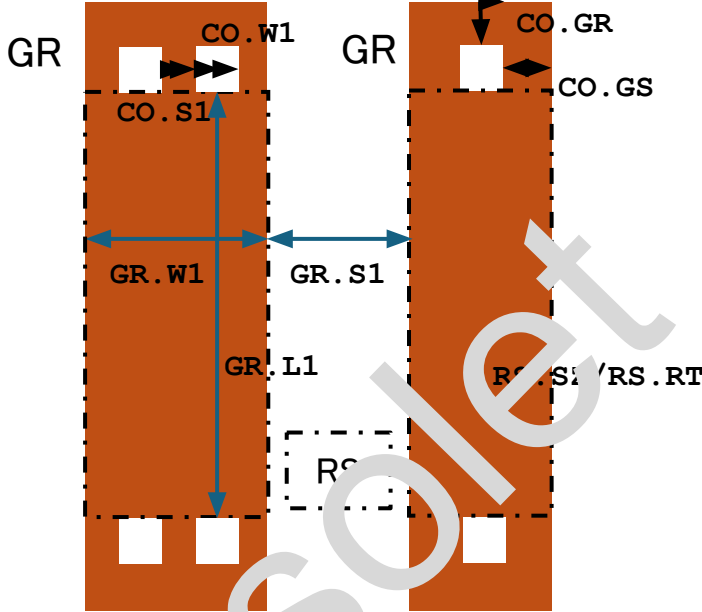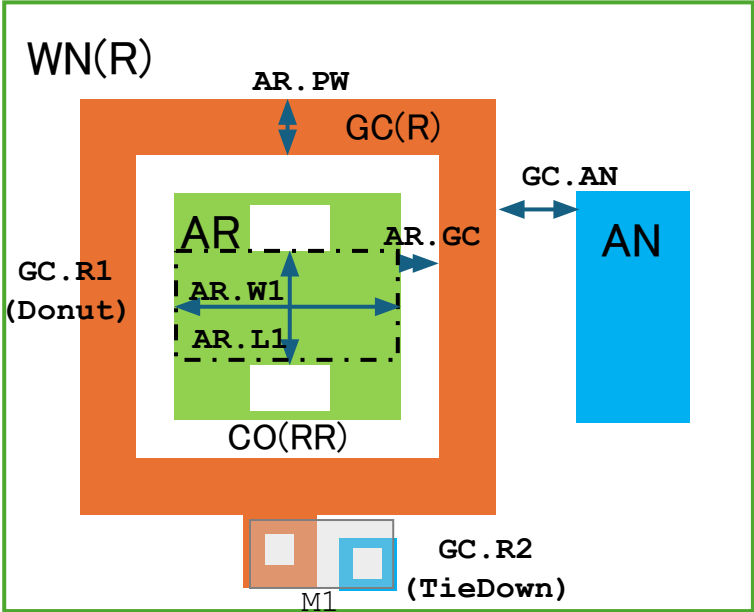

Rule	L1	L2	Func	MIN	MAX
AR.W1	RR	RR(W)	Wmin/max	2.8	20.0
AR.L1	RR	RR(L)	Lmin/max	13.0	100.0
RR.SZ	RR	RROK	Contain		
RR.RT	RR		Rect		
AR.GC	GC	AR	Smin	1.0	
AR.PW	GC(R)		Wmin	2.0	
AR.XY	AR	Bevel	XYmin	1.0	
GC.AN	GC(R)	AN	Smin	???	???
GC.R1	AR	GC(R)	Donut	0.0	
GC.R2	GC(R)	WN(R)	TieDown	0.0	
GR.W1	RS	RS(W)	Wmin/max	4.0	20.0
GR.L1	RS	RS(L)	Lmin/max	20.0	100.0
RS.SZ	RS	RSOK	Require		
RS.RT	RS		Rect		
GR.S1	RS	RS	Smin	2.0	
CR.W1	CO(RR)		Wmin	1.0	
CR.W2	CO(RRW)		Lmin/max	1.6	17.6
CR.W3	CO(RRN)		Wfix	1.0	1.0
CR.AR	CO(RR)	AR	Emin	0.8	
CR.AT	CO(RR)	AR(T)	Emin	1.5	
CR.ASN	CO(RRN)	ARN(S)	Efix	0.9	
CR.ASW	CO(RRW)	ARW(S)	Efix	1.2	
CC.W1	CO(C)		Wfix	1.2	1.2
CC.S1	CO(C)	CO(C)	SFIX	1.2	1.2
CO.SC	CO(C)	CO	Smin	1.2	
CC.AC	CO(C)	AC	Emin	2.9	
CC.AN	CO(C)	AN	Emin	1.2	
CS.S1	CO(RS)	CO(RS)	SFIX	1.0	1.0
CO.GR	CO	GR	Emin	0.8	
CO.GS	CO(RSM)	GR(S)	Efix	1.5	1.5
CO.RT	CO(RSM)		Rect		

RR(W) : Width of AR effective
RR(L) : Length of AR effective
RROK : Allowed W=2.8,4,6,12,20
GC(R) : GC in WN(R)
RS(W) : Width of GR effective
RS(L) : Length of GR effective
RSOK : Allowed W=4,6,12,20
WC : WN interacting AC
AR(T) : AR top fringe

CO(RR) : CO on AR
CO(RRW) : CO on AR (W>=4.0)
CO(RRN) : CO on AR (W=2.8)
ARN(S) : AR side fringe (W=2.8)
ARW(S) : AR side fringe (W>=4.0)
CO(C) : CO on WC
CO(RS) : CO on GR
GR(S) : GR side fringe
CO(RSM) : CO(sized) & GR(S)

*Strike-through rules are not yet implemented

The diagram illustrates a building's energy system with various components and energy flows. The components are represented by colored blocks and labeled with their respective names and parameters. The energy flows are indicated by arrows and labeled with their respective names and parameters.

Components and Parameters:


- M1(W):** A grey block representing a water system, with a parameter $M1.W3$.
- M1:** A grey block representing a main system, with parameters $M1.CL$, $M1.CO$, $M1.W1$, $M1.S1$, $M1.SW$, $M1.CT$, and $M1.CC$.
- M1(C):** A grey block representing a cooling system, with parameters $M1.CO$, $M1.CC$, $M1.SC$, and $CO(C)$.
- M2:** An orange block representing a second main system, with parameters $M2.V1$, $M2.W1$, and $M2.W3$.
- GC:** A brown block representing a gas condenser, with a parameter $V1.GA$.
- GR:** A brown block representing a gas radiator, with a parameter $V1.GA$.
- CO:** A grey block representing a condenser, with parameters $V1.CO$ and $CO(L)$.
- AC:** A pink block representing an air conditioning system, with parameters $M1.CC$ and $CO(CC)$.
- V1:** A grey block representing a ventilation system, with parameters $V1.W1$, $V1.S1$, and $V1.M1$.

Energy Flows:

- $M1.W3$: Energy flow from M1(W) to M1.
- $M1.SW$: Energy flow from M1 to M1(W).
- $M1.W1$: Energy flow from M1 to V1.
- $M1.S1$: Energy flow from V1 to M1.
- $M1.CL$: Energy flow from M1 to M1(W).
- $M1.CO$: Energy flow from M1 to M1(C).
- $V1.W1$: Energy flow from V1 to M1.
- $V1.S1$: Energy flow from M1 to V1.
- $V1.M1$: Energy flow from V1 to M1.
- $M2.W1$: Energy flow from M2 to M1.
- $M2.V1$: Energy flow from M2 to M1.
- $M2.W3$: Energy flow from M2 to M1.
- $M1.SC$: Energy flow from M1(C) to M1.
- $M1.CO$: Energy flow from M1(C) to M1.
- $CO(C)$: Energy flow from M1(C) to M1.
- $CO(CC)$: Energy flow from M1(C) to M1.
- $M1.CC$: Energy flow from M1(C) to M1.
- $V1.CO$: Energy flow from V1 to CO.
- $V1.GA$: Energy flow from GC to V1.
- $V1.GA$: Energy flow from GR to V1.
- $V1.L$: Energy flow from V1 to CO.
- $CO(L)$: Energy flow from CO to M1.
- $M1.CT$: Energy flow from M1 to M1(C).

```
GA      : GC/GR(all poly)
M1(W)   : Wide M1 (W>10.0um)
M1(I)   : M1 outside Pad/Capacitor
M2(I)   : M2 outside Pad/Capacitor
M1(C)   : M1 ring for Capacitor WN
CO(C)   : CO on M1(C) (W=1.2um)
CO(CC)  : CO on AC (W=1.2um)
CO(L)   : CO large contact (Area>=1.5um2)
```

Cat-7: ESD MOS transistor related

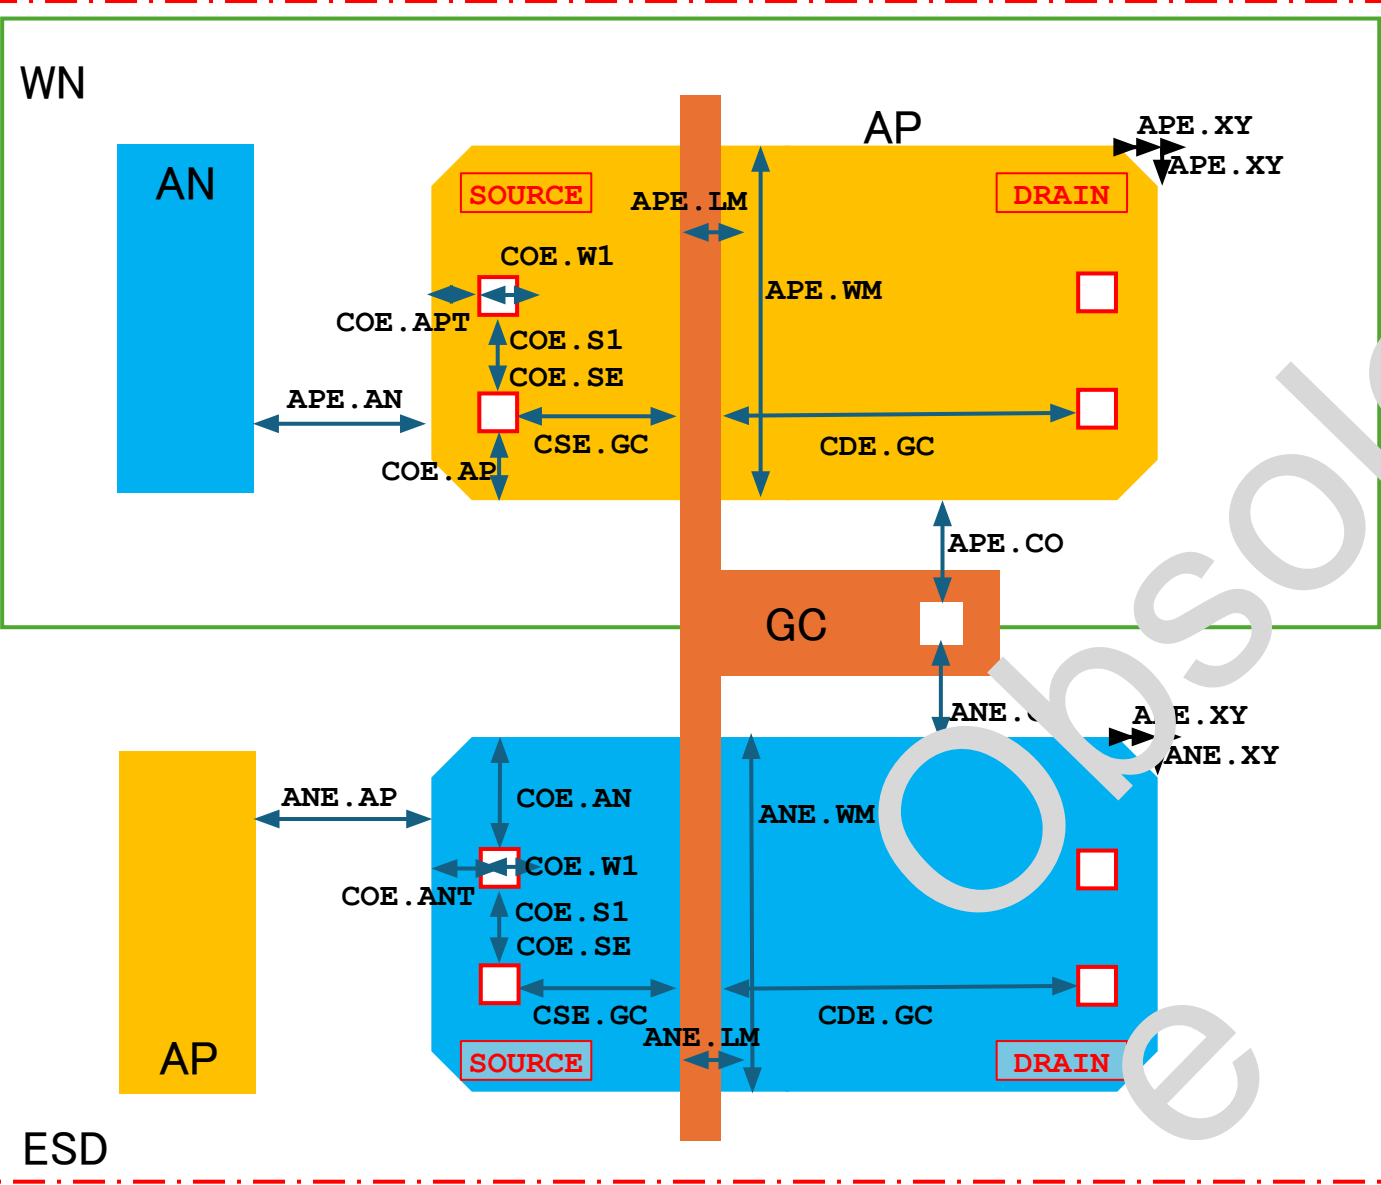


Rule	L1	L2	Func	MIN	MAX
APE.WM	PMOSE	APE-GC	Wmin/max	11.0	60.0
APE.LM	PMOSE	GC-APE	Lmin/max	2.0	30.0
APE.AN	APE	AN	Smin	10.0	
APE.XY	APE	Bevel	XYmin	1.4	
APE.CO	APE	CO	Smin	2.0	
ANE.WM	NMOSE	ANE-GC	Wmin/max	11.0	60.0
ANE.LM	NMOSE	GC-ANE	Lmin/max	2.0	30.0
ANE.AP	ANE	AP	Smin	10.0	
ANE.XY	ANE	Bevel	XYmin	1.4	
ANE.CO	ANE	CO	Smin	2.0	
COE.W1	CO(E)		Wfix	3.0	3.0
COE.S1	CO(E)	CO	Smin	1.6	
COE.SE	CO(E)	CO(E)	Sfix	1.6	1.6
CDE.GC	CD(E)	GC	Sfix	7.0	
CSE.GC	CS(E)	GC	Sfix	3.0	
COE.AP	CO(E)	AP	Emin	2.5	
COE.AN	CO(E)	AN	Emin	2.5	
COE.APT	CO(E)	AP(T)	Emin	4.0	
COE.ANT	CO(E)	AN(T)	Emin	4.0	

MPE : AP for ESD PMOS
MNE : AN for ESD NMOS
PMOSE : ESD PMOS Gate
NMOSE : ESD NMOS Gate
APE : MPE
ANE : MNE
AP(T) : AP Side Edges
AN(T) : AN Side Edges

CO(E) : CO on ESD
CD(E) : CO on ESD/Drain
CS(E) : CO on ESD/Source

Cat-8: PAD related

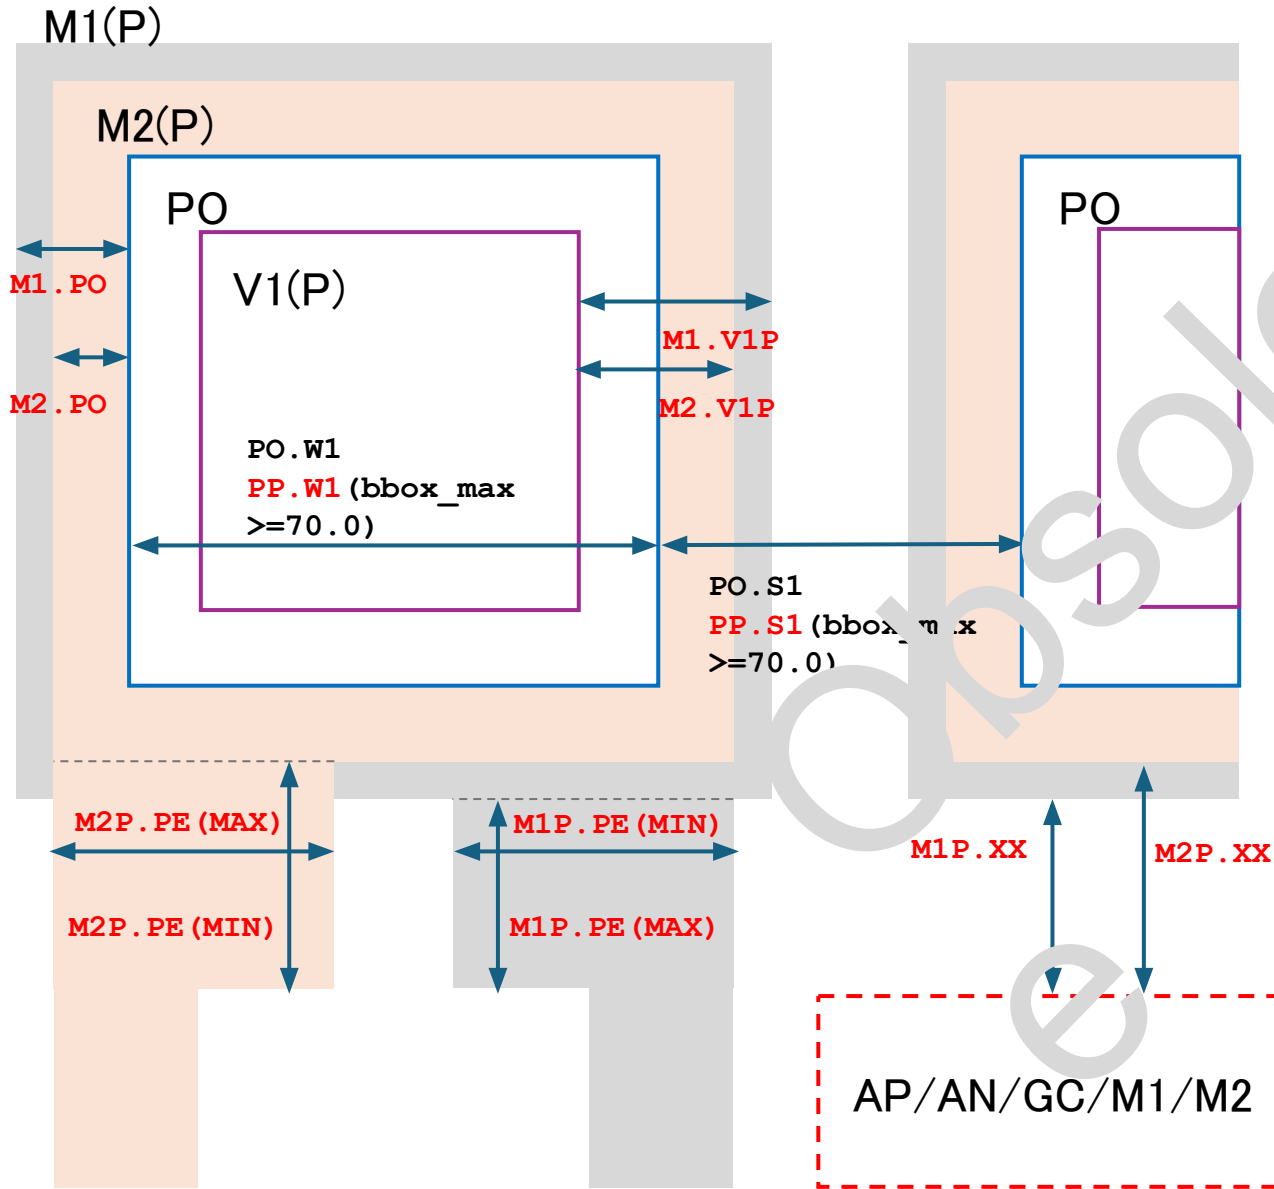

Rule	L1	L2	Func	MIN	MAX
PO.W1	PO		Rect	10.0	
PO.S1	PO	PO	Smin	20.0	
PP.W1	PP		Wmin	70.0	
PP.S1	PP	PP	Smin	64.0	
M1.PO	M1	PO	Fmin	5.0	
M2.PO	M2	PO	Fmin	5.0	
M1.V1P	M1	V1 (P)	Fmin	15.0	
M2.V1P	M2	V1 (P)	Fmin	15.0	
M1P.AA	M1 (P)	AA	Smin	14.0	
M2P.AA	M2 (P)	AA	Smin	14.0	
M1P.GA	M1 (P)	GA	Smin	14.0	
M2P.GA	M2 (P)	GA	Smin	14.0	
M1P.M1	M1 (P)	M1	Smin	14.0	
M2P.M2	M2 (P)	M2	Smin	14.0	
M1P.PE	M1 (P)	M1	Ext	14.0	40.0
M2P.PE	M2 (P)	M2	Ext	14.0	40.0
M2.PW	M2		EXTW	40.0	
M1.PW	M2		EXTW	40.0	

PP : PO for Pad (max dimension of the bbox >= 70.0um)
M1 (P) : M1 covering PO
M2 (P) : M2 covering PO
V1 (P) : V1 through M1 (P) - M2 (P)


Obsolete slides

2026/07/27


Reflected GitHub issues

<https://github.com/OpenSUSI/TR-1um/issues>

Cat-1: Prohibited

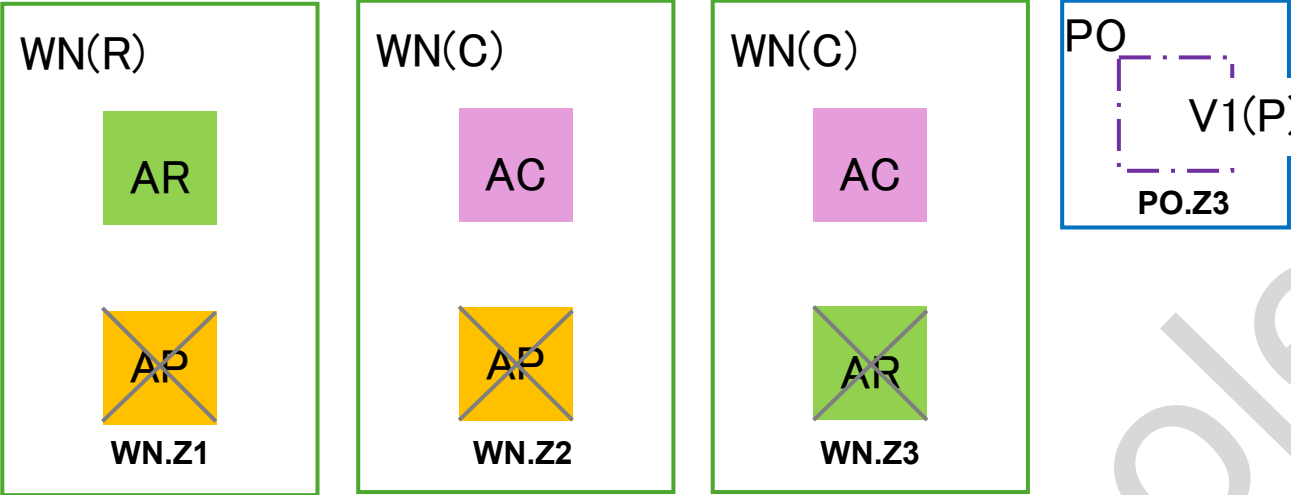

Rule	L1	L2	Func	MIN	MAX
WN.Z1	WN(R)	AP	Prohibit		
WN.Z2	WN(C)	AP	Prohibit		
WN.Z3	WN(C)	AR	Prohibit		
CO.Z1	CO	AA+GC+GR	Require		
PO.Z3	CO	M1	Require		
V1.Z1	V1	M1	Require		
V1.Z2	V1	M2	Require		
PO.Z1	PO	M1	Require		
PO.Z2	PO	M2	Require		
PO.Z3	PO	V1(P)	Contain		

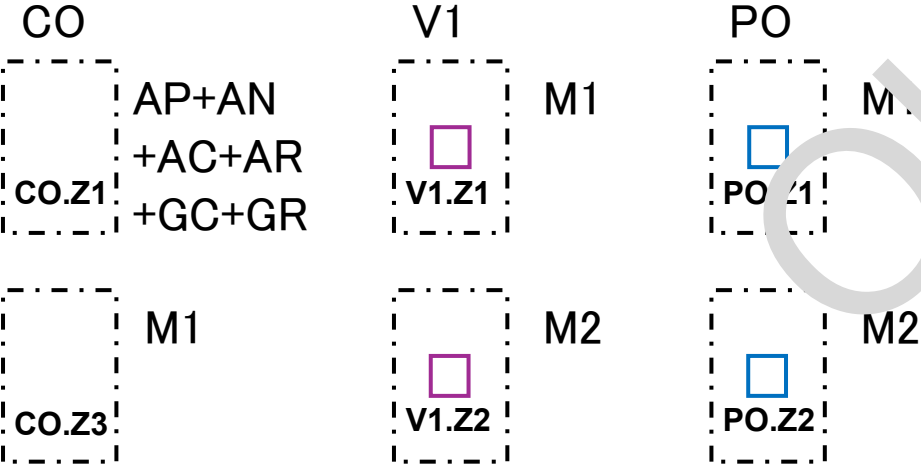


Function:

Wmin/max: L1 Width min/max
Smin/max: L1 Space min/max (L1=L2)
Smin/max: L1 Separate L2 min/max
Emin/max: L1 Enclosed L2 min/max
Fmin/max: L1 Enclosing L2 min/max
Wfix: L1 Width equal
Sfix: Space equal
Efix: Fixed enclosure
Donut: L1 Souuounded by L2
Prohibit: Must not overlap
Require: Must not be outside
Contain: Must contain
Rect: Must be a rectangle

AA : AP+AN+AC+AR
WN(R) : WN covering AR
WN(C) : WN covering AC
V1(P) : V1 interacting PO


Cat-2: WN to AP/AN/AR/AC related

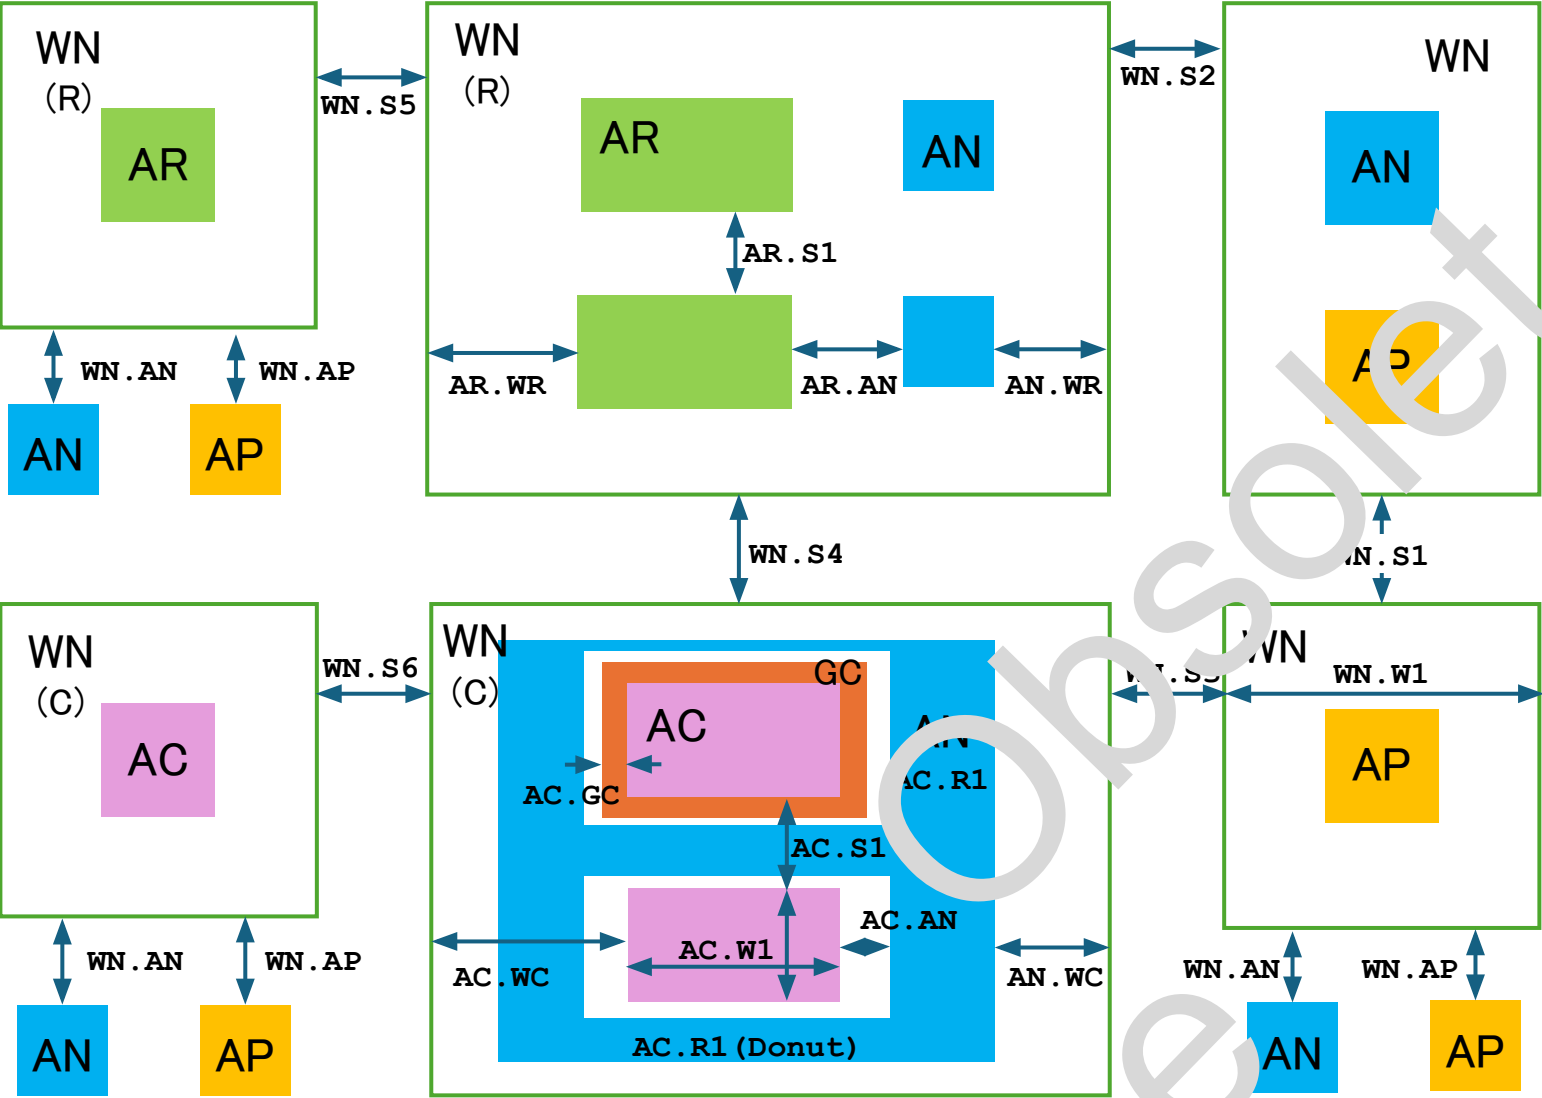

Rule	L1	L2	Func	MIN	MAX
WN.W1	WN		Wmin	8.0	
WN.S1	WN	WN	Smin	12.0	
WN.S2	WN (R)	WN	Smin	9.5	
WN.S3	WN (C)	WN	Smin	12.0	
WN.S4	WN (R)	WN (C)	Smin	9.5	
WN.S5	WN (R)	WN (R)	Smin	8.0	
WN.S6	WN (C)	WN (C)	Smin	12.0	
WN.AP	WN	AP	Smin	5.0	
WN.AN	WN	AN	Smin	10.0	
AR.S1	AR	AR	Smin	4.0	
AR.WR	AR	WN (R)	Emin	10.0	
AN.WR	AN	WN (R)	Emin	5.0	
AR.AN	AR	AN	Smin	4.0	
AC.W1	AC		Rect	28.5	120.0
AC.S1	AC	AC	Smin	6.4	
AC.WC	AC	WN (C)	Emin	8.0	
AN.WC	AN	WN (C)	Emin	3.0	
AC.AN	AC	AN	Sfix	2.8	2.8
AC.GC	AC	GC	Efix	1.4	1.4
AC.R1	AC	AN (C)	Donut	0.0	

WN(R) : WN covering AR
WN(C) : WN covering AC
AN(C) : AN in WN(C)


Cat-3: MOS transistor related

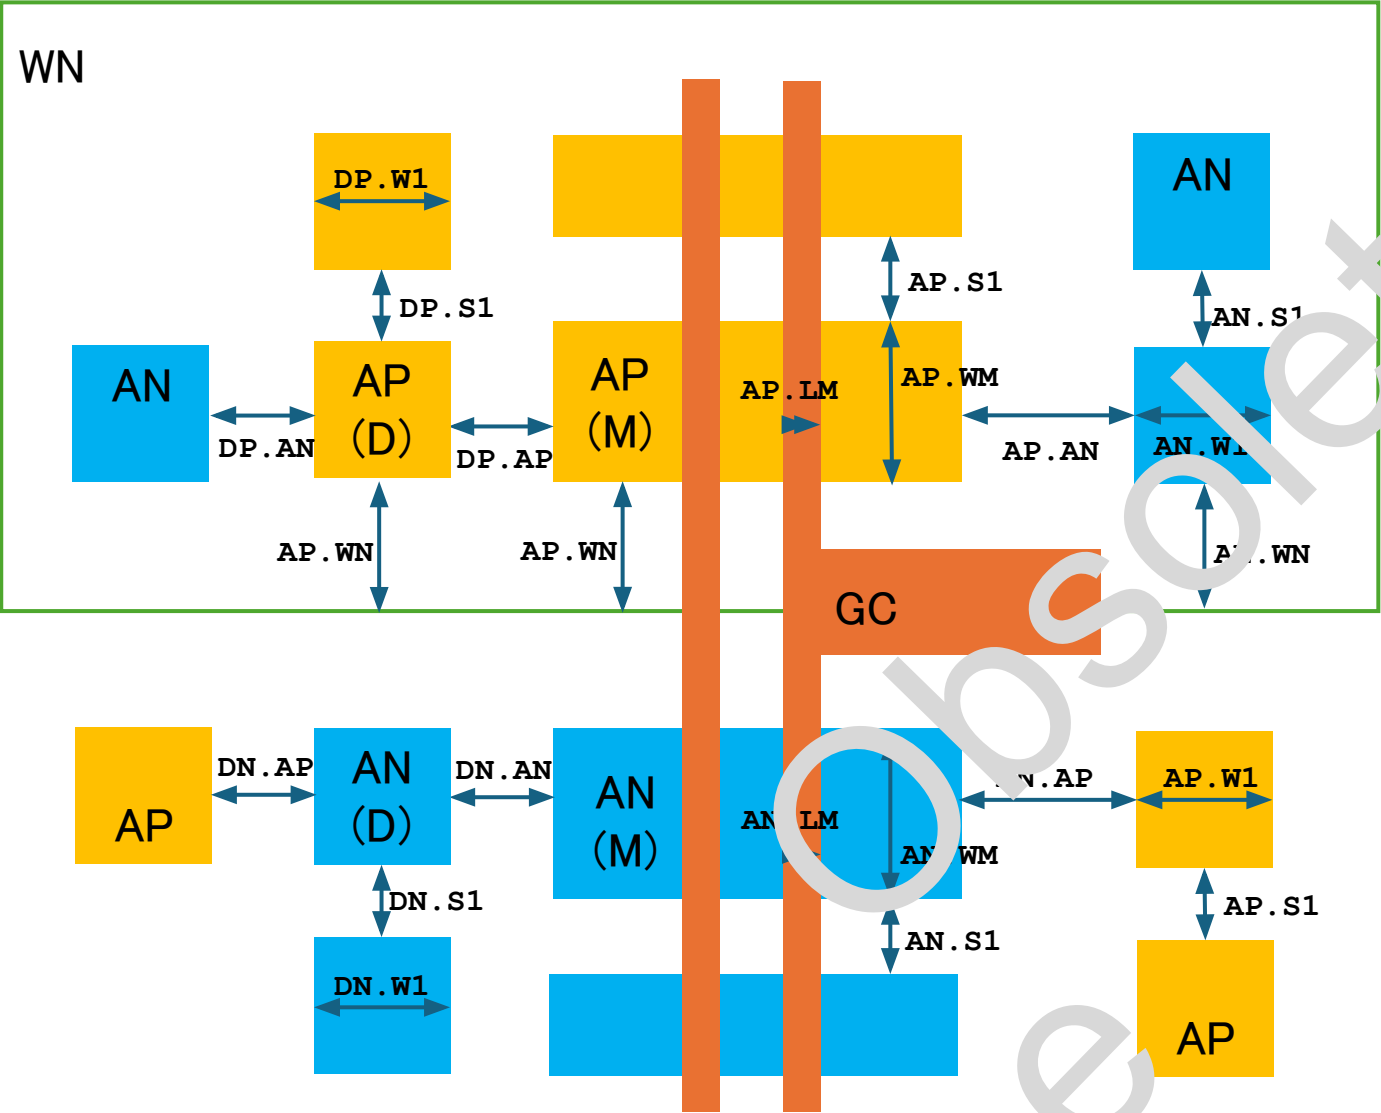

Rule	L1	L2	Func	MIN	MAX
AP.W1	AP		Wmin	1.4	
AP.S1	AP	AP	Smin	1.4	
AP.AN	AP	AN	Smin	2.8	
AP.WM	PMOS	AP-GC	Wmin/max	3.4	60.0
AP.LM	PMOS	GC-AP	Lmin/max	1.0	30.0
AP.WN	AP	WN	Emin	7.0	
DP.W1	DP		Wmin	2.8	
DP.S1	DP	DP	Smin	1.4	
DP.AP	DP	AP (M)	Smin	2.8	
DP.AN	DP	AN	Smin	2.8	
AN.W1	AN		Wmin	1.4	
AN.S1	AN	AN	Smin	1.4	
AN.AP	AN	AP	Smin	2.8	
AN.WM	NMOS	AN-GC	Wmin/max	3.4	60.0
AN.LM	NMOS	GC-AN	Lmin/max	1.0	30.0
AN.WN	AN	WN (M)	Emin	5.0	
DN.W1	DN		Wmin	2.8	
DN.S1	DN	DN	Smin	1.4	
DN.AP	DN	AP	Smin	2.8	
DN.AN	DN	AN (M)	Smin	2.8	

PMOS : AP&GC-ESD
NMOS : AN&GC-ESD
DP/AP (D) : AP not interacting(GC) inside WN
DN/AN (D) : AN not interacting(GC) outside WN
AN (M) : AN-AN (D)
AP (M) : AP-AP (D)
WN (M) : WN- (WN covering AC)

Cat-4: Contact and Poly related

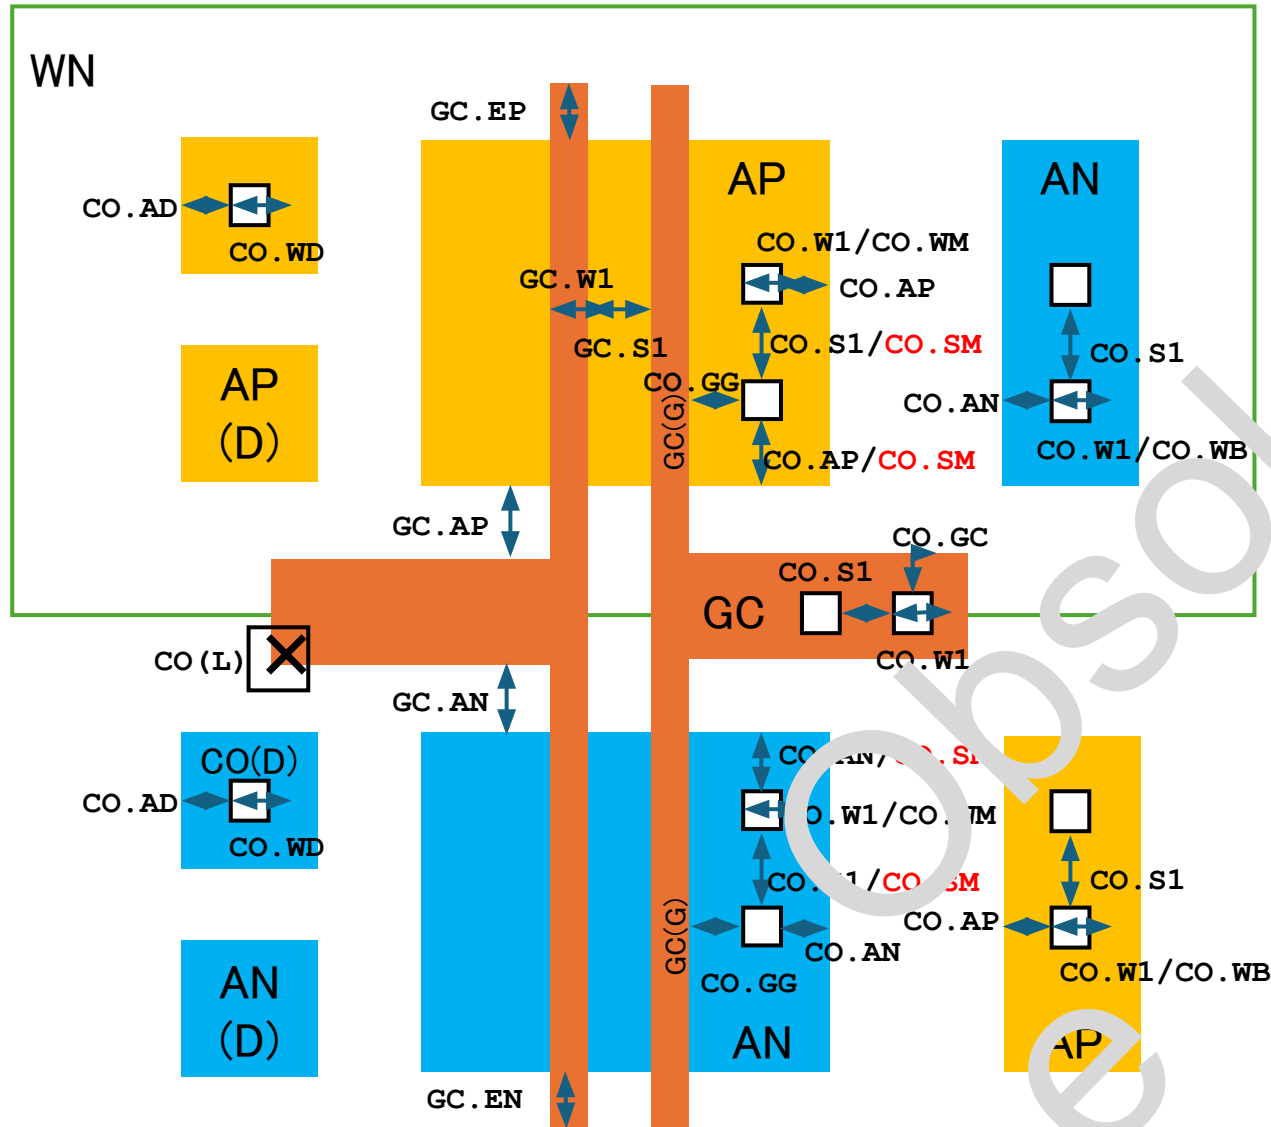

Rule	L1	L2	Func	MIN	MAX
GC.W1	GC		Wmin	1.0	
GC.S1	GC	GC	Smin	1.2	
GC.AP	GC	AP	Smin	0.4	
GC.AN	GC	AN	Smin	0.4	
GC.EP	AP	GC	Emin	1.2	
GC.AN	AN	GC	Emin	1.2	
CO.W1	CO		Rect	1.0	
CO.WM	CO (M)		Wfix	1.0	1.0
CO.WB	CO (B)		Wfix	1.0	1.0
CO.S1	CO	CO	Smin	1.0	
CO.SM	CO (M)	CO (M)	Sfix	1.0	1.0
CO.WD	CO (D)		Wfix	1.2	1.2
CO.SD	CO (D)	CO	Smin	1.2	
CO.AD	CO (D)	AP+AN	Emin	1.2	
CO.AP	CO	AP	Emin	0.8	
CO.AN	CO	AN	Emin	0.8	
CL.GC	CO (L)	GC+GR	Prohibit		
CO.GG	CO (M)	GC	Sfix	1.0	1.0
CO.GC	CO	GC+GR	Emin	0.8	

PMOS : AP&GC-ESD

NMOS : AN&GC-ESD

AP (D) : AP not interacting GC

AN (D) : AN not interacting GC

CO (M) : CO on PMOS/NMOS

CO (B) : CO on BG

$$\text{CO (D)} : \text{CO on AP (D) / AN (D)}$$

CO (L) : CO (Area $\geq 1.5\mu\text{m}^2$)





GP : AN&WN

GN : AP-WN

WC : WN covering AC

$$BG : (GP+GN) - WC$$

Cat-5: Resistors(AR/GR) and Capacitor(AC) related

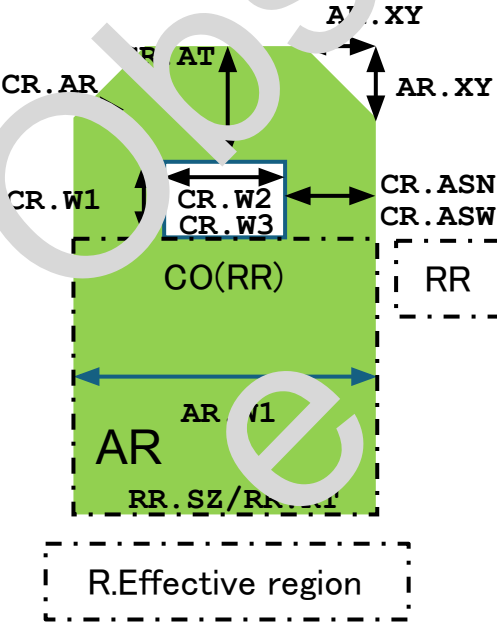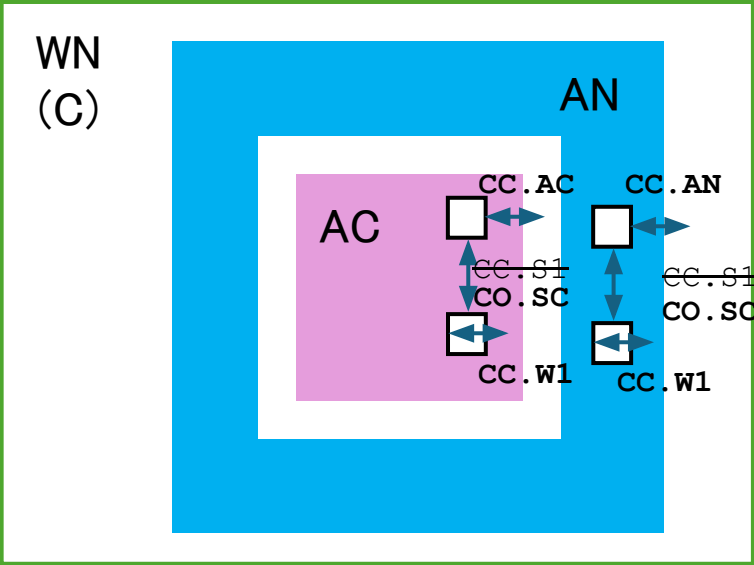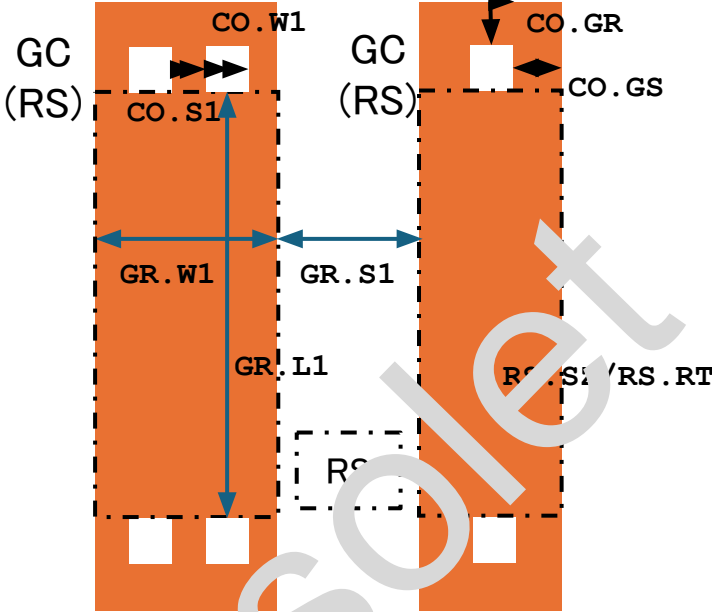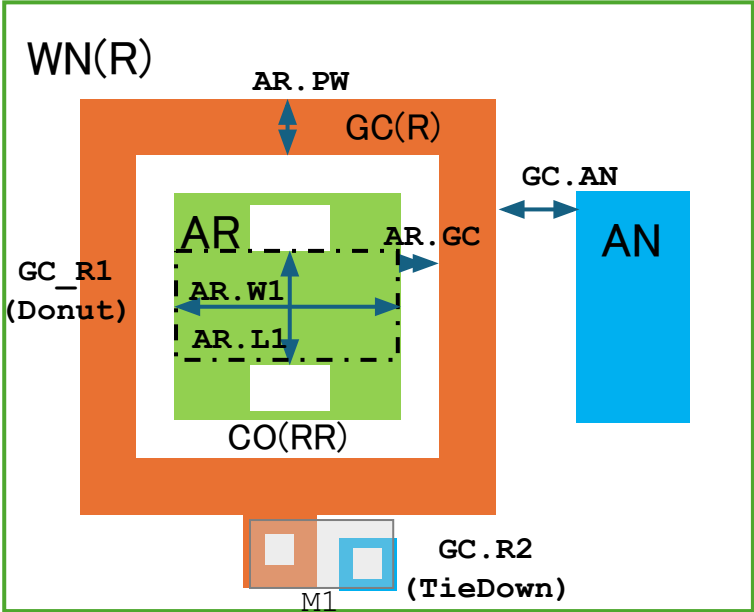


Rule	L1	L2	Func	MIN	MAX
AR.W1	RR	RR(W)	Wmin/max	2.8	20.0
AR.L1	RR	RR(L)	Lmin/max	13.0	100.0
RR.SZ	RR	RROK	Contain		
RR.RT	RR		Rect		
AR.GC	GC	AR	Smin	1.0	
AR.PW	GC(R)		Wmin	2.0	
AR.XY	AR	Bevel	XYmin	1.0	
GC.AN	GC(R)	AN	Smin	???	???
GC.R1	AR	GC(R)	Donut	0.0	
GC.R2	GC(R)	WN(R)	TieDown	0.0	
GR.W1	RS	RS(W)	Wmin/max	4.0	20.0
GR.L1	RS	RS(L)	Lmin/max	20.0	100.0
RS.SZ	RS	RSOK	Require		
RS.RT	RS		Rect		
GR.S1	RS	RS	Smin	2.0	
CR.W1	CO(RR)		Wmin	1.0	
CR.W2	CO(RRW)		Lmin/max	1.6	17.6
CR.W3	CO(RRN)		Wfix	1.0	1.0
CR.AR	CO(RR)	AR	Emin	0.8	
CR.AT	CO(RR)	AR(T)	Emin	1.5	
CR.ASN	CO(RRN)	ARN(S)	Efix	0.9	
CR.ASW	CO(RRW)	ARW(S)	Efix	1.2	
CC.W1	CO(C)		Wfix	1.2	1.2
CC.S1	CO(C)	CO(C)	SFIX	1.2	1.2
CO.SC	CO(C)	CO	Smin	1.2	
CC.AC	CO(C)	AC	Emin	2.9	
CC.AN	CO(C)	AN	Emin	1.2	
CS.S1	CO(RS)	CO(RS)	SFIX	1.0	1.0
CO.GR	CO	GR	Emin	0.8	
CO.GS	CO(RSM)	GR(S)	Efix	1.5	1.5
CO.RT	CO(RSM)		Rect		

RR(W) : Width of AR effective
RR(L) : Length of AR effective
RROK : Allowed W=2.8,4,6,12,20
GC(R) : GC in WN(R)
RS(W) : Width of GR effective
RS(L) : Length of GR effective
RSOK : Allowed W=4,6,12,20
WC : WN interacting AC
AR(T) : AR top fringe

CO(RR) : CO on AR
CO(RRW) : CO on AR (W>=4.0)
CO(RRN) : CO on AR (W=2.8)
ARN(S) : AR side fringe (W=2.8)
ARW(S) : AR side fringe (W>=4.0)
CO(C) : CO on WC
CO(RS) : CO on GR
GR(S) : GR side fringe
CO(RSM) : CO(sized) & GR(S)

*Strike-through rules are not yet implemented

Cat-6: M1/V1/M2 related

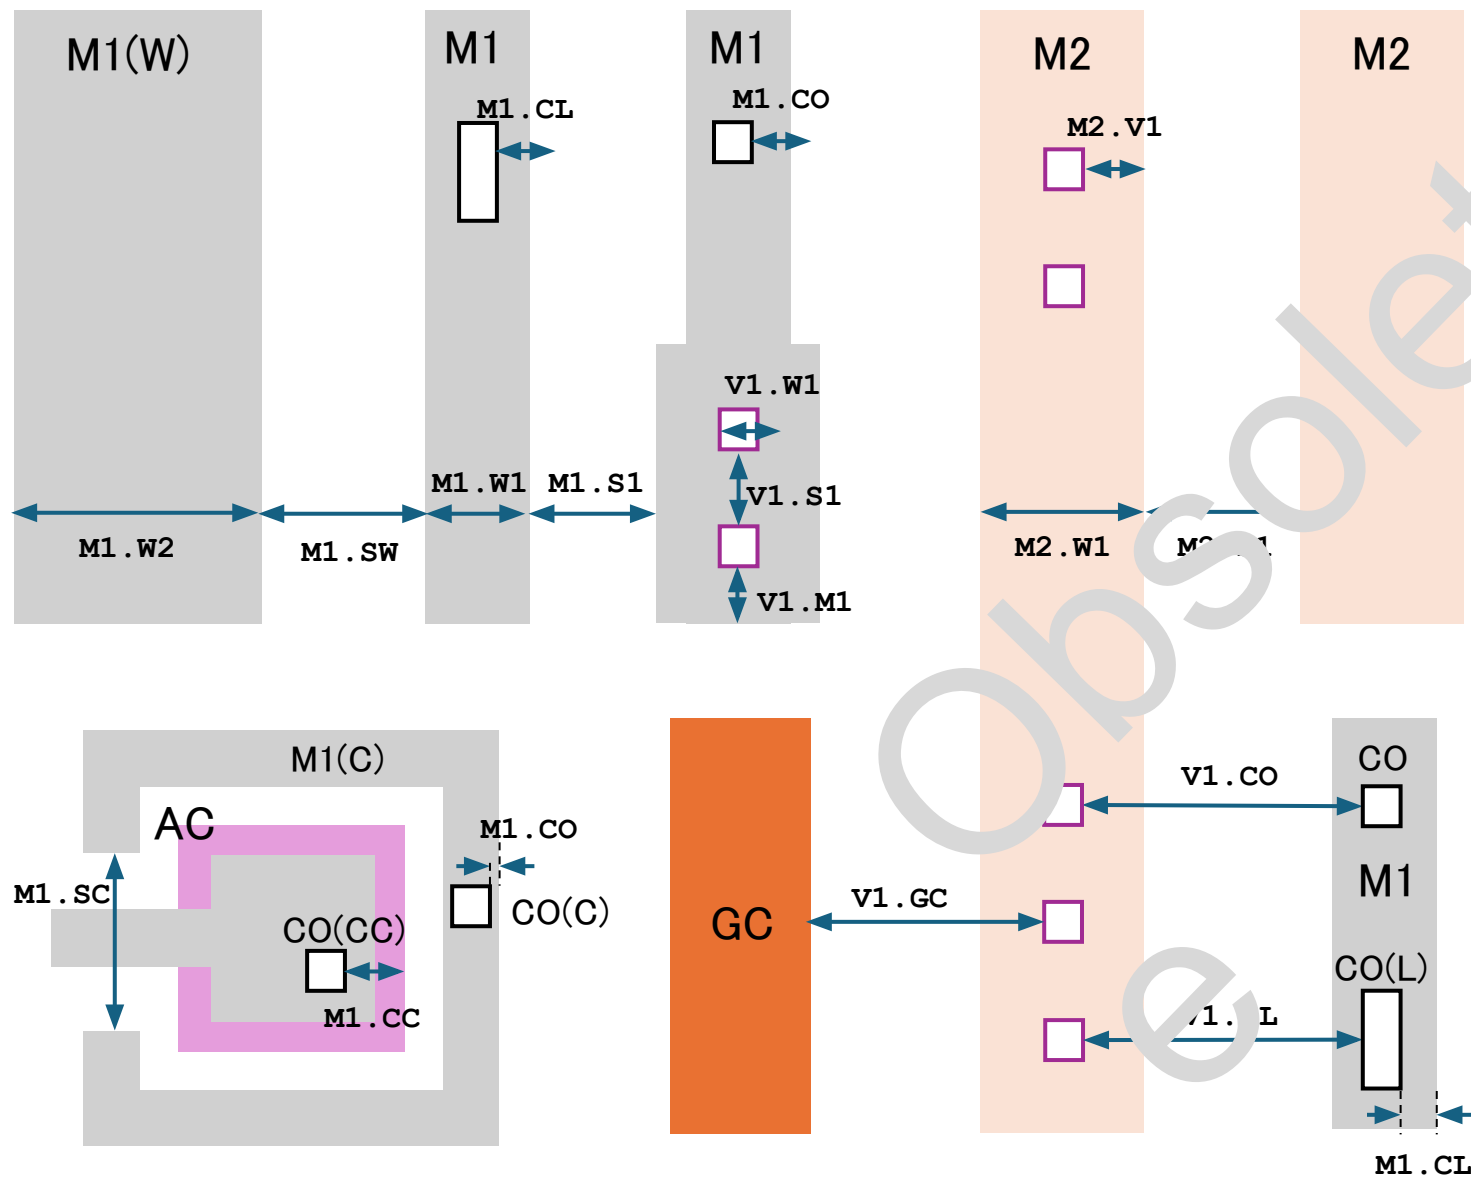


Rule	L1	L2	Func	MIN	MAX
M1.W1	M1		Wmin	1.8	
M1.W2	M1 (W)		Wmin	10.0	
M1.S1	M1	M1	Smin	1.4	
M1.SC	M1 (C)	M1 (C)	Smin/Smax	10.0	10.0
M1.CO	M1	CO	Fmin	0.8	
M1.CC	M1	CO (CC)	Fmin	1.3	
M1.CL	M1	CO (L)	Fmin	1.2	
M1.SW	M1 (W)	M1	Smin	2.0	
V1.W1	V1		Wfix	1.4	1.4
V1.S1	V1	V1	Smin	1.5	
V1.M1	V1	M1	Emin	1.0	
V1.GC	V1	GC	Smin	1.2	
V1.CO	V1	CO	Smin	1.0	
V1.CL	V1	CO (L)	Smin	1.4	
M2.W1	M2		Wmin	3.0	
M2.S1	M2	M2	Smin	2.0	
M2.V1	M2	V1	Fmin	1.0	

M1 (W) : Wide M1 (W>=10.0)
WN (C) : WN covering AC
M1 (C) : M1 interacting (AN & WN (C))
CO (C) : CO on M1 (C) (W=1.2um)
CO (CC) : CO on AC (W=1.2um)
CO (L) : CO large contact (Area>=1.5um²)

*Strike-through rules are not yet implemented

Cat-7: ESD MOS transistor related

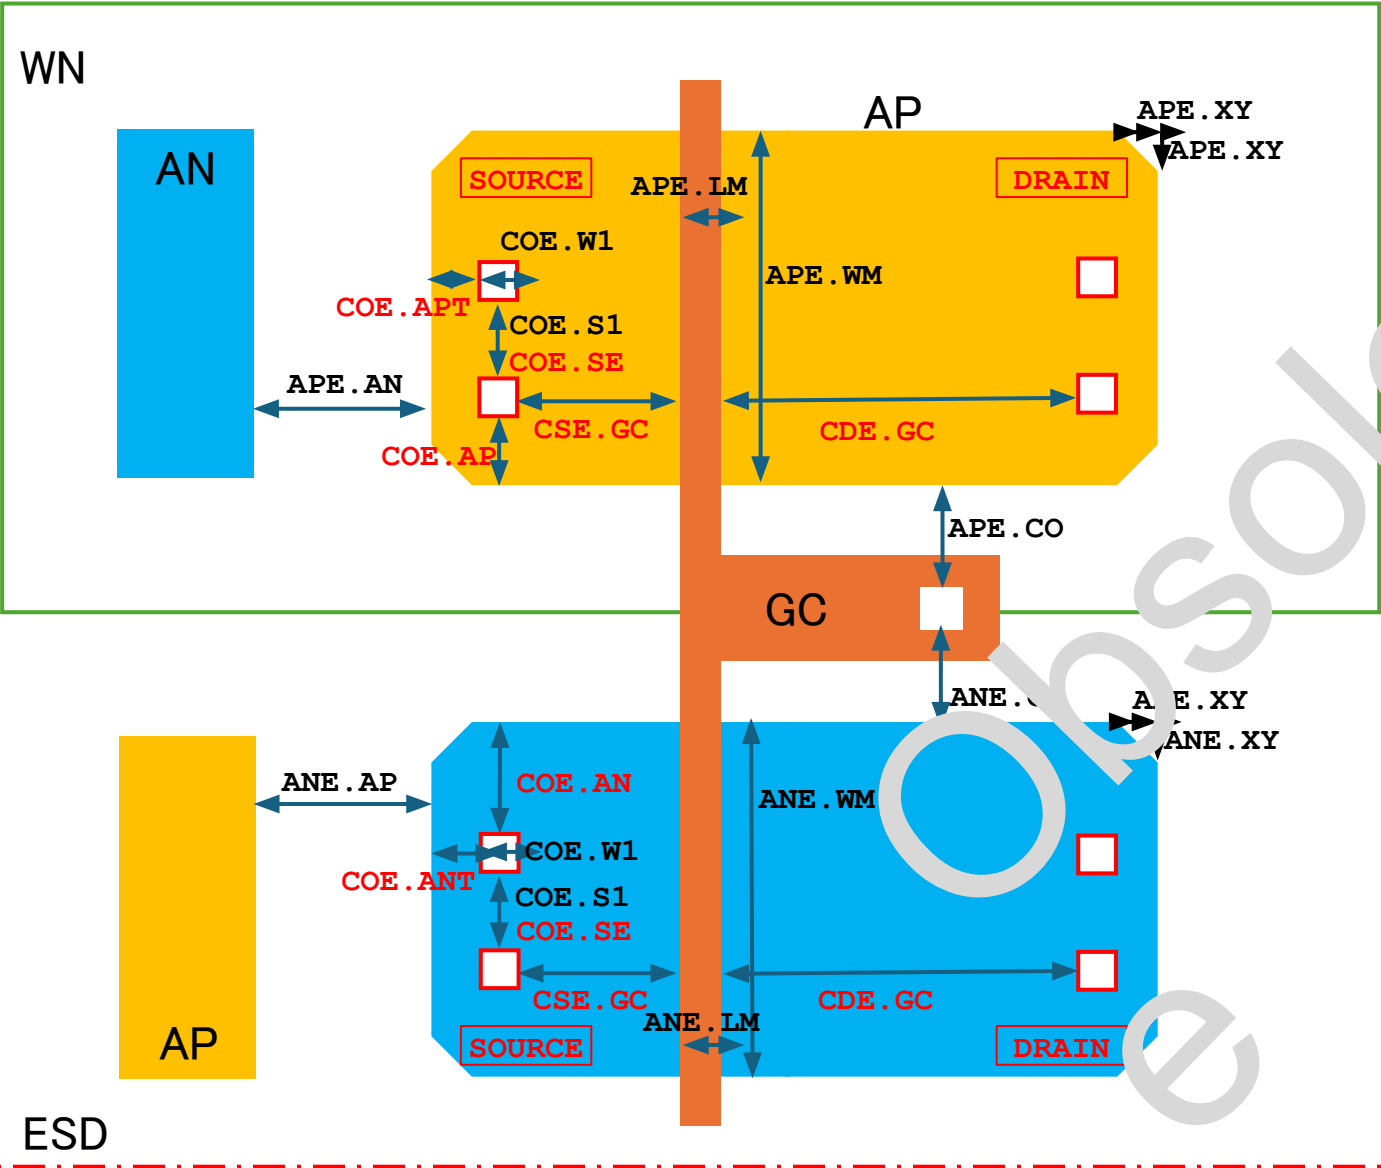


Rule	L1	L2	Func	MIN	MAX
APE.WM	PMOSE	APE-GC	Wmin/max	11.0	60.0
APE.LM	PMOSE	GC-APE	Lmin/max	2.0	30.0
APE.AN	APE	AN	Smin	10.0	
APE.XY	APE	Bevel	XYmin	1.4	
APE.CO	APE	CO	Smin	2.0	
ANE.WM	NMOSE	ANE-GC	Wmin/max	11.0	60.0
ANE.LM	NMOSE	GC-ANE	Lmin/max	2.0	30.0
ANE.AP	ANE	AP	Smin	10.0	
ANE.XY	ANE	Bevel	XYmin	1.4	
ANE.CO	ANE	CO	Smin	2.0	
COE.W1	CO(E)		Wfix	3.0	3.0
COE.S1	CO(E)	CO	Smin	1.6	
COE.SE	CO(E)	CO(E)	Sfix	1.6	1.6
CDE.GC	CD(E)	GC	Sfix	7.0	
CSE.GC	CS(E)	GC	Sfix	3.0	
COE.AP	CO(E)	AP	Emin	2.5	
COE.AN	CO(E)	AN	Emin	2.5	
COE.APT	CO(E)	AP(T)	Emin	4.0	
COE.ANT	CO(E)	AN(T)	Emin	4.0	

MPE : AP interacting(GC) & WN & ESD
MNE : AN interacting(GC) - WN & ESD
PMOSE : MPE & GC
NMOSE : MNE & GC
APE : MPE
ANE : MNE
AP(T) : AP Side Edges
AN(T) : AN Side Edges

CO(E) : CO on ESD
CD(E) : CO on ESD/Drain
CS(E) : CO on ESD/Source

Cat-8: PAD related

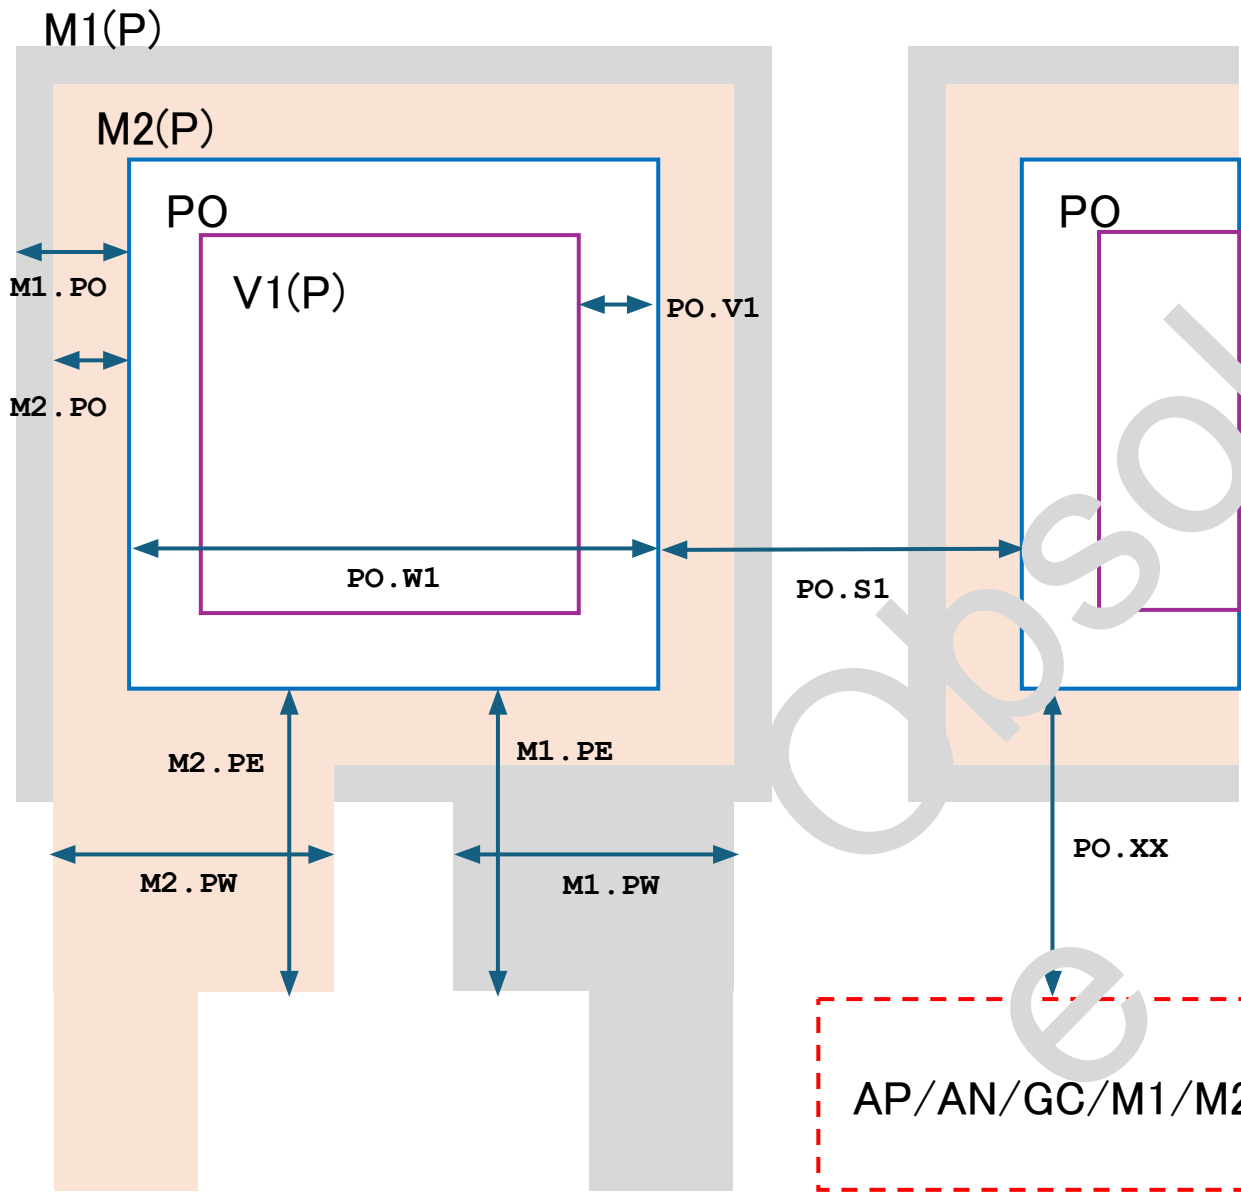

Rule	L1	L2	Func	MIN	MAX
PO.W1	PO		Wmin	70.0	
PO.S1	PO	PO	Smin	64.0	
M2.PO	M2 (P)	PO	Fmin	5.0	
M1.PO	M1 (P)	PO	Fmin	5.0	
PO.V1	PO	V1 (P)	Emin	10.0	
PO.AP	PO	AP	Smin	14.0	
PO.AN	PO	AN	Smin	14.0	
PO.GC	PO	GC	Smin	14.0	
PO.M1	PO	M1	Smin	14.0	
PO.M2	PO	M2	Smin	14.0	
M2.PE	M2		EXTL	19.0	
M2.PW	M2		EXTW	40.0	
M1.PE	M2		EXTL	19.0	
M1.PW	M2		EXTW	40.0	

**** Not yet implemented**

M1 (P) : M1 covering PO
M2 (P) : M2 covering PO
V1 (P) : V1 through M1 (P) -M2 (P)


Obsolete slides

2026/06/30


Reflected GitHub issues

<https://github.com/OpenSUSI/TR-1um/issues>

Cat-1: Prohibited

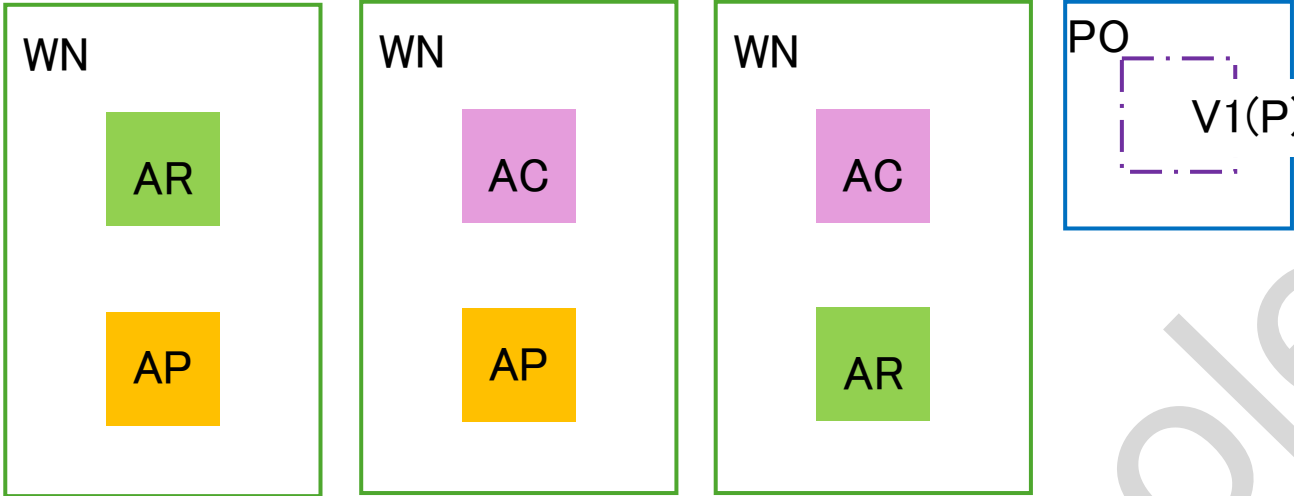

Rule	L1	L2	Func	MIN	MAX
WN.Z1	WN (R)	AP	Prohibit		
WN.Z2	WN (C)	AP	Prohibit		
WN.Z3	WN (C)	AR	Prohibit		
CO.Z1	CO	AA+GC+GR	Require		
CO.Z3	CO	M1	Require		
V1.Z1	V1	M1	Require		
V1.Z2	V1	M2	Require		
PO.Z1	PO	M1	Require		
PO.Z2	PO	M2	Require		
PO.Z3	PO	V1 (P)	Contain		

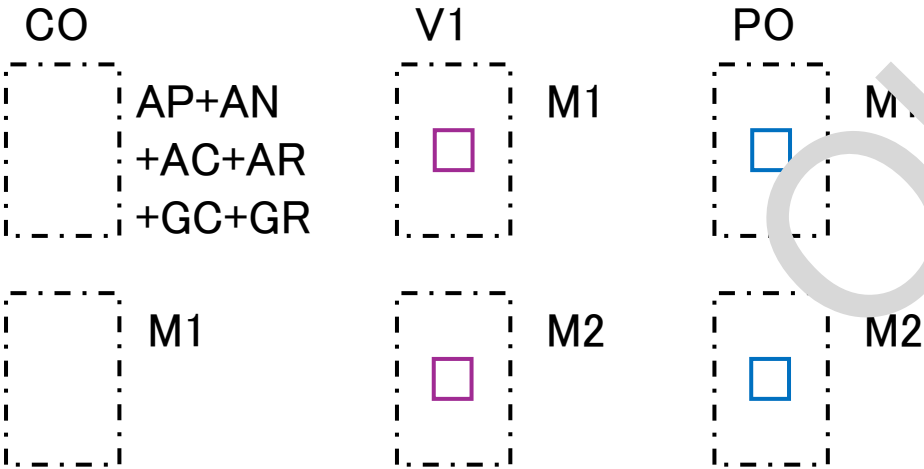

Function:

Wmin/max: L1 Width min/max

Smin/max: L1 Space min/max (L1=L2)

Smin/max: L1 Separate L2 min/max

Emin/max: L1 Enclosed L2 min/max

Fmin/max: L1 Enclosing L2 min/max

ECmin: MOS Endcap min

Wfix: L1 Width equal

Sfix: Space equal

Efix: Fixed enclosure

Donut: L1 Souuounded by L2

Prohibit: Must not overlap

Require: Must not be outside

Contain: Must contain


Rect: Must be a rectangle

WN (R) : WN covering AR

WN (C) : WN covering AC

V1 (P) : V1 interacting PO


Cat-2: WN to AP/AN/AR/AC related

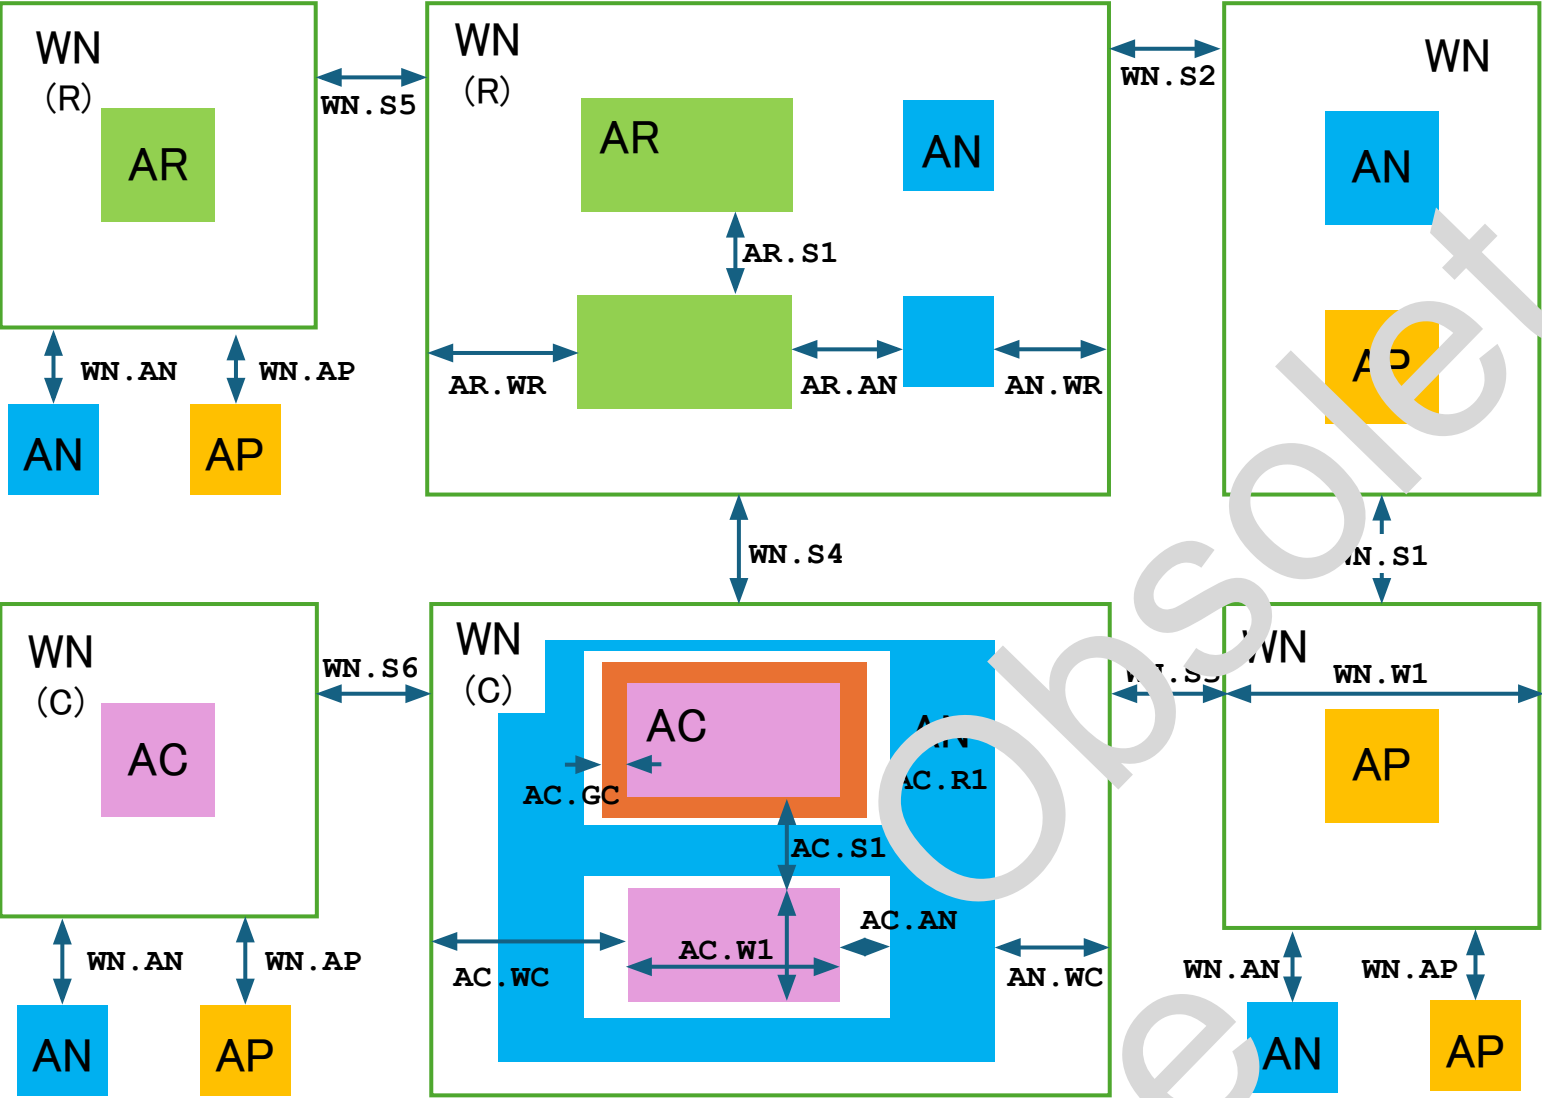

Rule	L1	L2	Func	MIN	MAX
WN.W1	WN		Wmin	8.0	
WN.S1	WN	WN	Smin	12.0	
WN.S2	WN (R)	WN	Smin	9.5	
WN.S3	WN (C)	WN	Smin	12.0	
WN.S4	WN (R)	WN (C)	Smin	9.5	
WN.S5	WN (R)	WN (R)	Smin	8.0	
WN.S6	WN (C)	WN (C)	Smin	12.0	
WN.AP	WN	AP	Smin	5.0	
WN.AN	WN	AN	Smin	10.0	
AR.S1	AR	AR	Smin	4.0	
AR.WR	AR	WN (R)	Emin	10.0	
AN.WR	AN	WN (R)	Emin	5.0	
AR.AN	AR	AN	Smin	4.0	
AC.W1	AC		Rect	28.5	120.0
AC.S1	AC	AC	Smin	6.4	
AC.WC	AC	WN (C)	Emin	8.0	
AN.WC	AN	WN (C)	Emin	3.0	
AC.AN	AC	AN	Sfix	2.8	2.8
AC.GC	AC	GC	Efix	1.4	1.4
AC.R1	AC	AN (C)	Donut	0.0	

WN(R) : WN covering AR
WN(C) : WN covering AC
AN(C) : AN in WN(C)


Cat-3: MOS transistor related

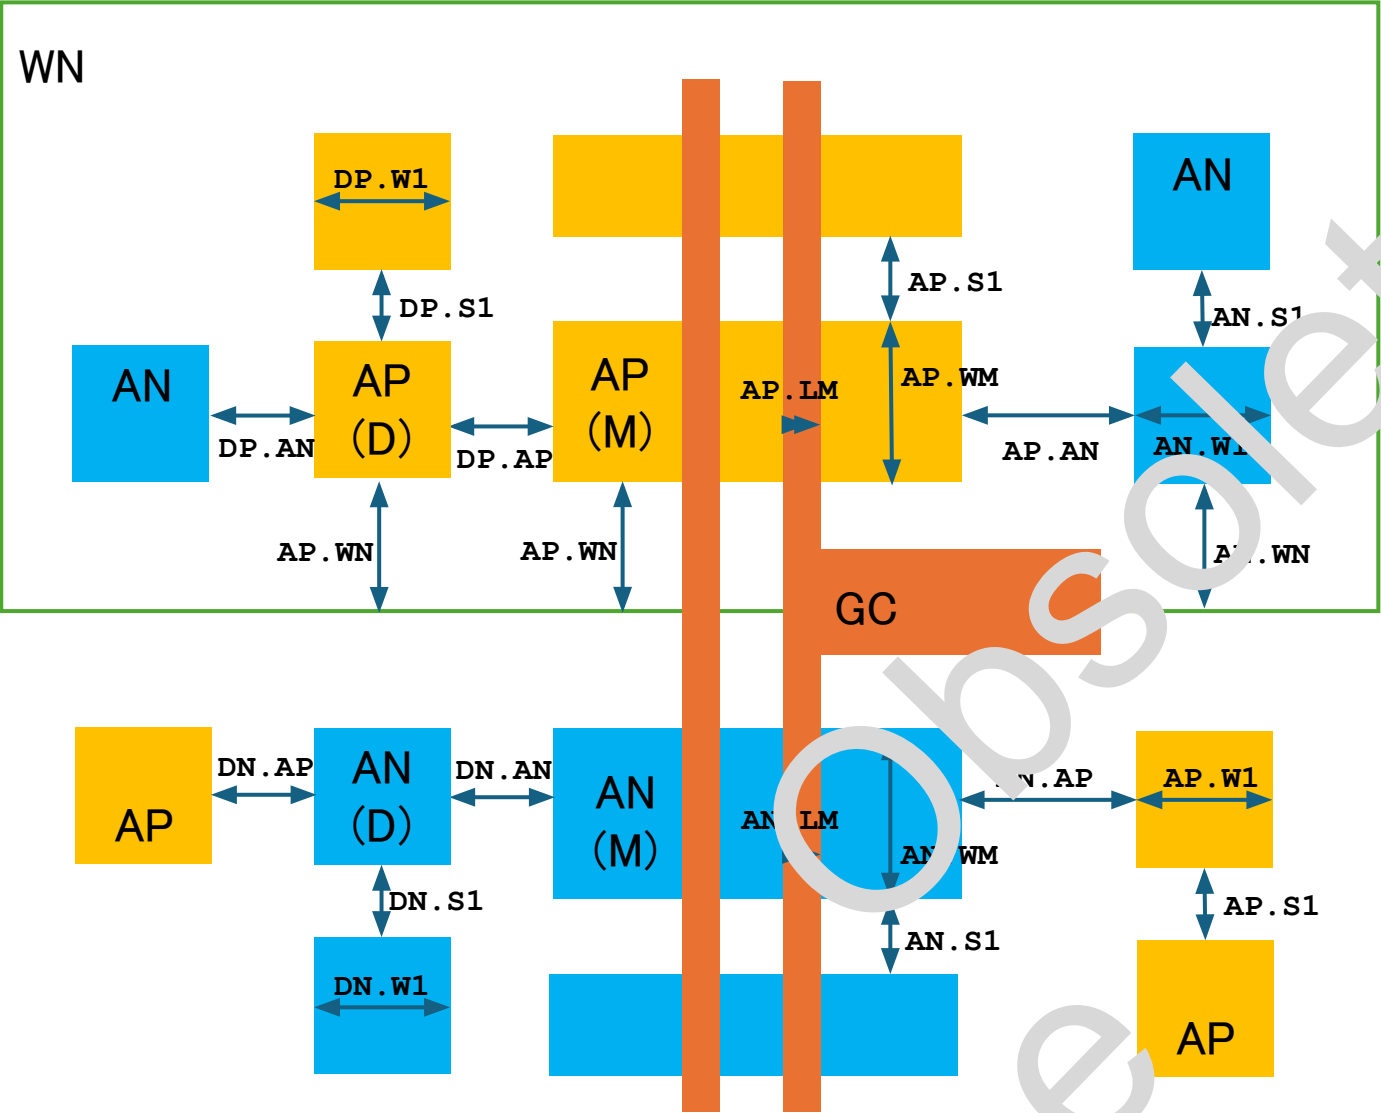

Rule	L1	L2	Func	MIN	MAX
AP.W1	AP		Wmin	1.4	
AP.S1	AP	AP	Smin	1.4	
AP.AN	AP	AN	Smin	2.8	
AP.WM	PMOS	AP-GC	Wmin/max	3.4	60.0
AP.LM	PMOS	GC-AN	Lmin/max	1.0	30.0
AP.WN	AP	WN	Emin	7.0	
DP.W1	DP		Wmin	2.8	
DP.S1	DP	DP	Smin	1.4	
DP.AP	DP	AP (M)	Smin	2.8	
DP.AN	DP	AN	Smin	2.8	
AN.W1	AN		Wmin	1.4	
AN.S1	AN	AN	Smin	1.4	
AN.AP	AN	AP	Smin	2.8	
AN.WM	NMOS	AN-GC	Wmin/max	3.4	60.0
AN.LM	NMOS	GC-AN	Lmin/max	1.0	30.0
AN.WN	AN	WN (M)	Emin	5.0	
DN.W1	DN		Wmin	2.8	
DN.S1	DN	DN	Smin	1.4	
DN.AP	DN	AP	Smin	2.8	
DN.AN	DN	AN (M)	Smin	2.8	

PMOS : AP&GC
NMOS : AN&GC
DP/AP (D) : AP not interacting GC inside WN
DN/AN (D) : AN not interacting GC outside WN
AN (M) : AN-AN (D)
AP (M) : AP-AP (D)
WN (M) : WN-(WN covering AC)

Cat-4: Contact and Poly related

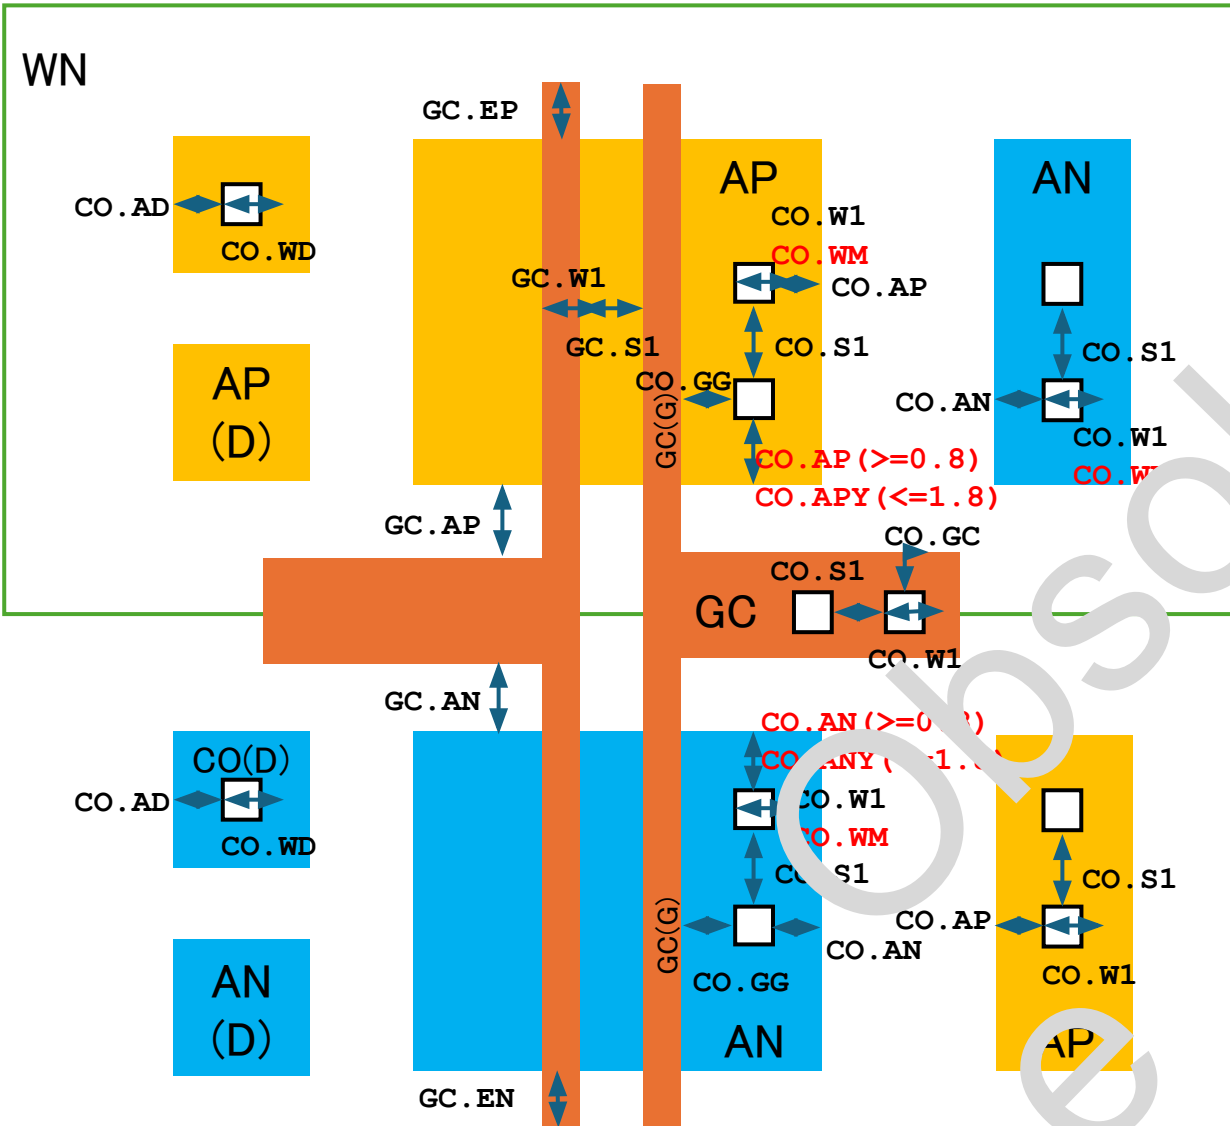

Rule	L1	L2	Func	MIN	MAX
GC.W1	GC		Wmin	1.0	
GC.S1	GC	GC	Smin	1.2	
GC.AP	GC	AP	Smin	0.4	
GC.AN	GC	AN	Smin	0.4	
GC.PP	PMOS	GC	ECmin	1.2	
GC.EN	NMOS	GC	ECmin	1.2	
CO.W1	CO		Rect	1.0	
CO.WM	CO (M)		Wfix	1.0	1.0
CO.WB	CO (B)		Wfix	1.0	1.0
CO.S1	CO	CO	Smin	1.0	
CO.WD	CO (D)		Wfix	1.2	1.2
CO.SD	CO (D)	CO	Smin	1.2	
CO.AD	CO (D)	AP+AN	Emin	1.2	
CO.AP	CO	AP	Emin	0.8	
CO.AN	CO	AN	Emin	0.8	
CL.GC	CO (L)	GC+GR	Prohibit		
CO.GG	CO	GC (G)	Smin	1.0	
CO.GC	CO	GC+GR	Emin	0.8	

GP : AN&WN

GN : AP-WN

WC : WN covering AC

$$\text{BG} : (\text{GP} + \text{GN}) - \text{WC}$$

CO (M) : CO on PMOS/NMOS





CO (B) : CO on BG

$$\text{CO}(D) : \text{CO on AP}(D) / \text{AN}(D)$$

CO (L) : CO (Area $\geq 1.5\mu\text{m}^2$)

GC (G) : GC for PMOS/NMOS

Cat-5: Resistors(AR/GR) and Capacitor(AC) related

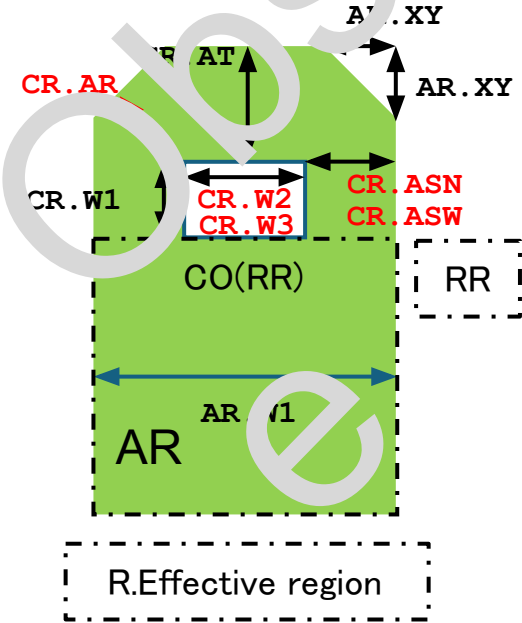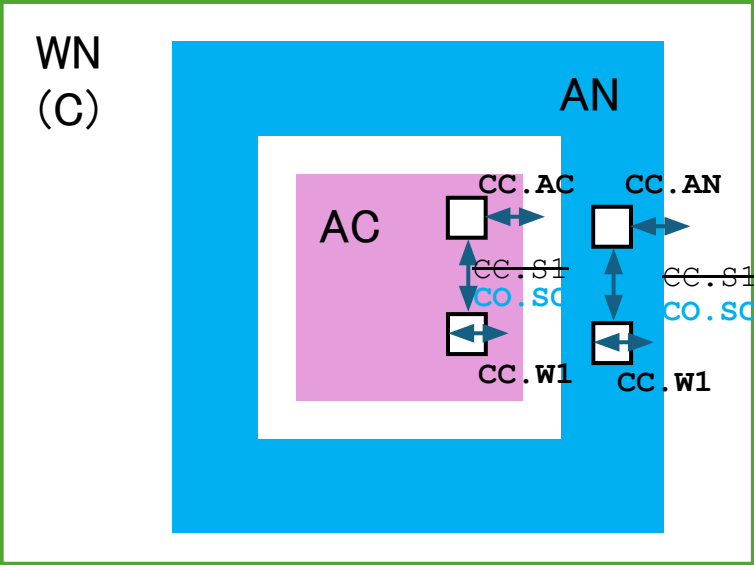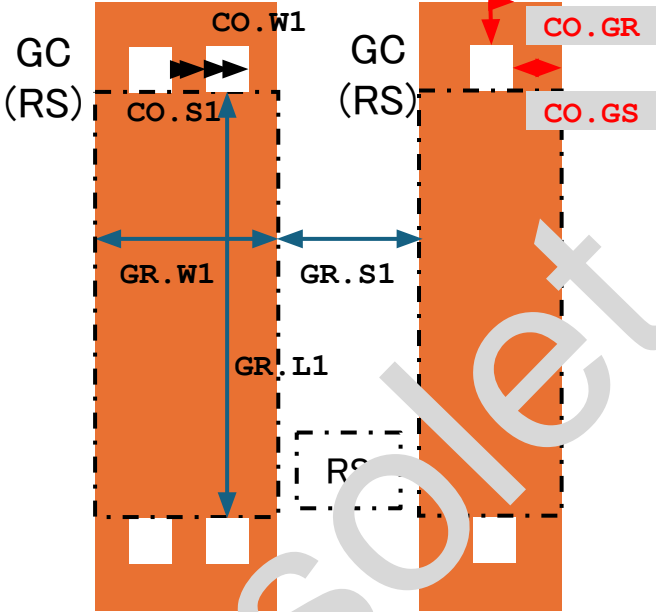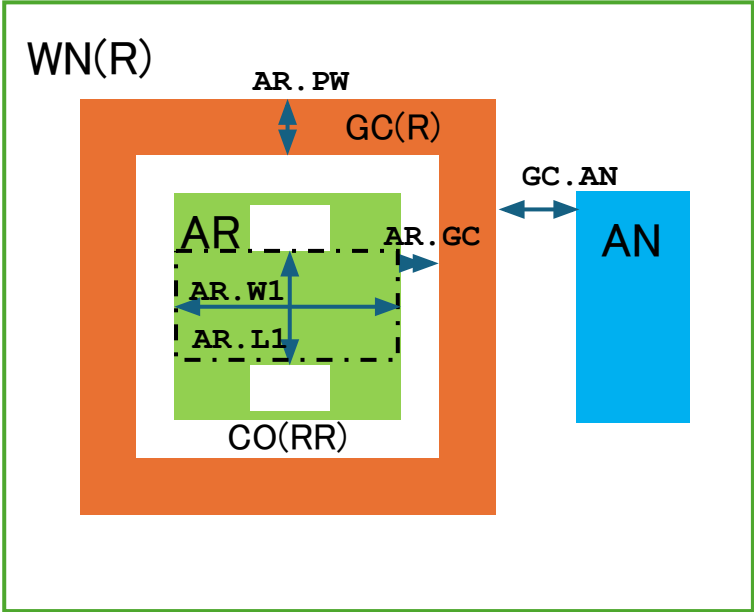

Rule	L1	L2	Func	MIN	MAX
AR.W1	RR	RR(W)	Wmin/max	2.8	20.0
AR.L1	RR	RR(L)	Lmin/max	13.0	100.0
RR.SZ	RR	RROK	Contain		
RR.RT	RR		Rect		
AR.GC	GC	AR	Smin	1.0	
AR.PW	GC(R)		Wmin	2.0	
AR.XY	AR	Bevel	XYmin	1.0	
GC.AN	GC(R)	AN	Smin	???	???
GC.R1	AR	GC(R)	Donut	0.0	
GC.R2	GC(R)	WN(R)	TieDown	0.0	
GR.W1	RS	RS(W)	Wmin/max	4.0	20.0
GR.L1	RS	RS(L)	Lmin/max	20.0	100.0
RS.SZ	RS	RSOK	Require		
RS.RT	RS		Rect		
GR.S1	RS	RS	Smin	2.0	
CR.W1	CO(RR)		Wmin	1.0	
CR.W2	CO(RRW)		Lmin/max	1.6	17.6
CR.W3	CO(RRN)		Wfix	1.0	1.0
CR.AR	CO(RR)	AR	Emin	0.8	
CR.AT	CO(RR)	AR(T)	Emin	1.5	
CR.ASN	CO(RRN)	ARN(S)	Efix	0.9	
CR.ASW	CO(RRW)	ARW(S)	Efix	1.2	
CC.W1	CO(C)		Wfix	1.2	1.2
CC.S1	CO(C)	CO(C)	SFIX	1.2	1.2
CO.SC	CO(C)	CO	Smin	1.2	
CC.AC	CO(C)	AC	Emin	2.9	
CC.AN	CO(C)	AN	Emin	1.2	
CS.S1	CO(RS)	CO(RS)	SFIX	1.0	1.0
CO.GR	CO	GR	Emin	0.8	
CO.GS	CO(RSM)	GR(S)	Efix	1.5	1.5
CO.RT	CO(RSM)		Rect		

- RR(W) : Width of AR effective

RR(L) : Length of AR effective

RROK : Allowed W=2.8,4,6,12,20

GC(R) : GC in WN(R)

RS(W) : Width of GR effective

RS(L) : Length of GR effective

RSOK : Allowed W=4,6,12,20

WC : WN interacting AC
- CO(RR) : CO on AR

CO(RRW) : CO on AR(W>=4.0)

CO(RRN) : CO on AR(W=2.8)

ARN(S) : AR side fringe (W=2.8)

ARW(S) : AR side fringe (W>=4.0)

CO(C) : CO on WC


CO(RS) : CO on GR

GR(S) : GR side fringe

CO(RSM) : CO(sized) & GR(S)

*Strike-through rules are not yet implemented

Cat-6: M1/V1/M2 related

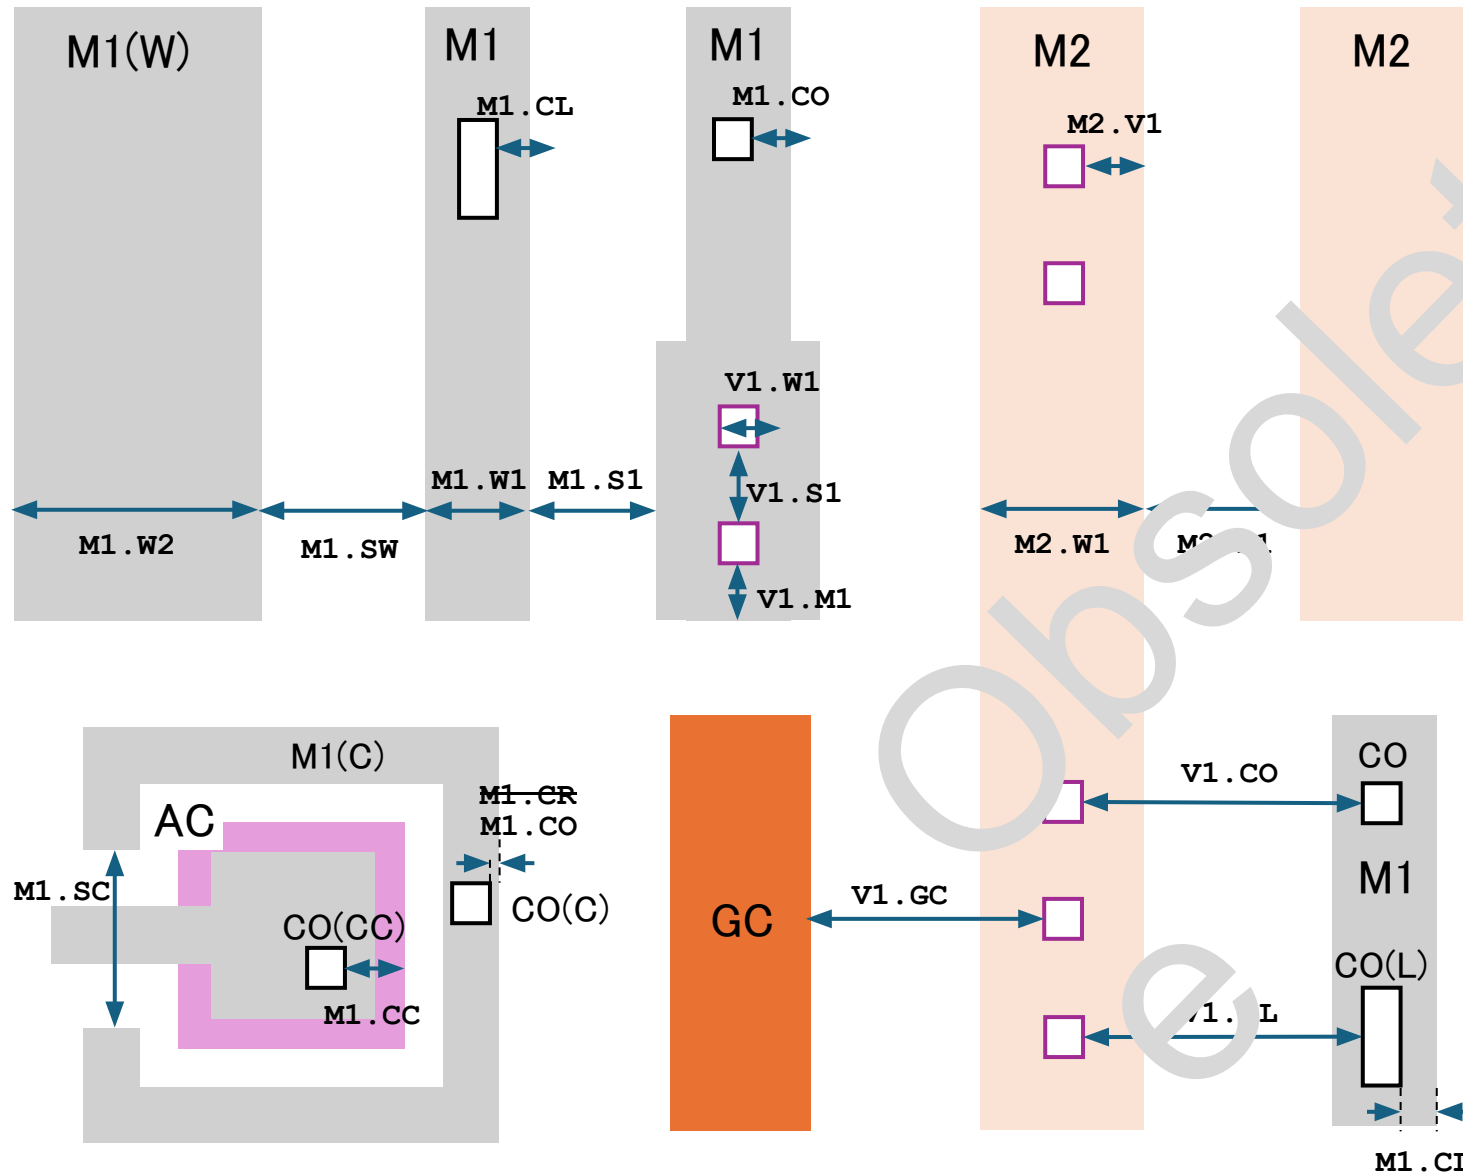


Rule	L1	L2	Func	MIN	MAX
M1.W1	M1		Wmin	1.8	
M1.W2	M1 (W)		Wmin	10.0	
M1.S1	M1	M1	Smin	1.4	
M1.SC	M1 (C)	M1 (C)	Smin/Smax	10.0	10.0
M1.CO	M1	CO	Fmin	0.8	
M1.CR	M1	CO (C)	Fmin	1.2	
M1.CC	M1	CO (CC)	Fmin	1.3	
M1.CL	M1	CO (L)	Fmin	1.2	
M1.SW	M1 (W)	M1	Smin	2.0	
V1.W1	V1		Wfix	1.4	1.4
V1.S1	V1	V1	Smin	1.5	
V1.M1	V1	M1	Emin	1.0	
V1.GC	V1	GC	Smin	1.2	
V1.CO	V1	CO	Smin	1.0	
V1.CL	V1	CO (L)	Smin	1.4	
M2.W1	M2		Wmin	3.0	
M2.S1	M2	M2	Smin	2.0	
M2.V1	M2	V1	Fmin	1.0	

M1 (W) : Wide M1 (W>=10.0)
WN (C) : WN covering AC
M1 (C) : M1 interacting (AN & WN (C))
CO (C) : CO on M1 (C) (W=1.2um)
CO (CC) : CO on AC (W=1.2um)
CO (L) : CO large contact (Area>=1.5um²)

*Strike-through rules are not yet implemented

Cat-7: ESD MOS transistor related

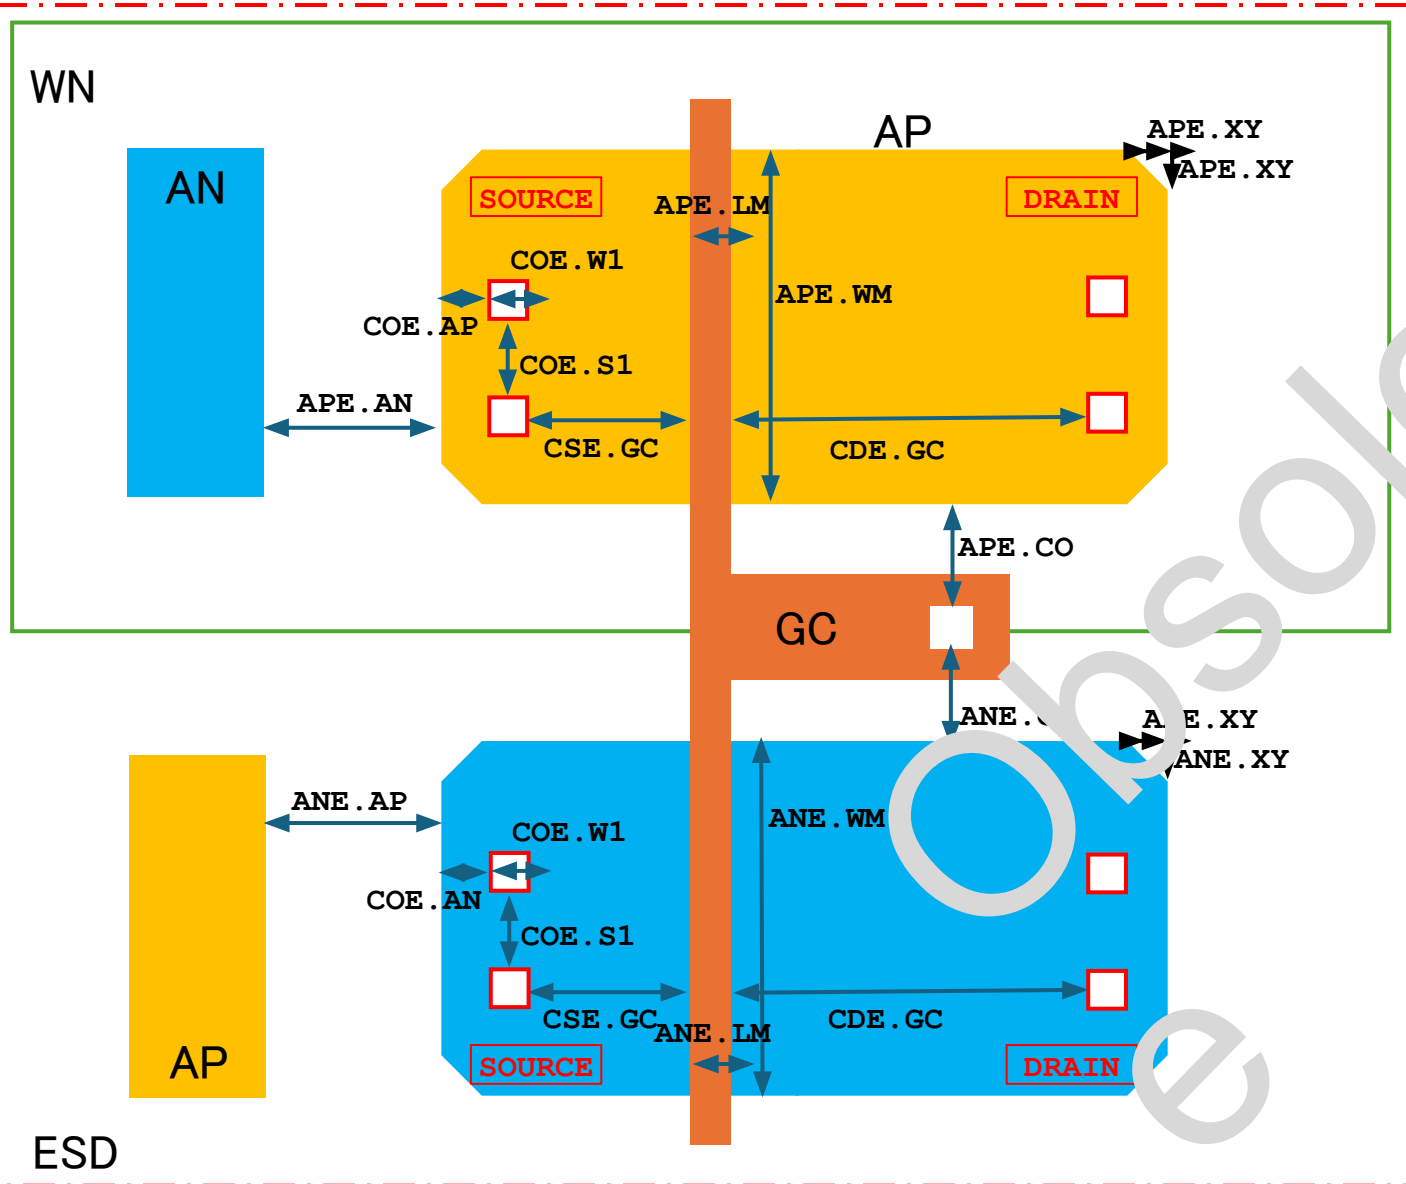


Rule	L1	L2	Func	MIN	MAX
APE.WM	PMOSE	APE-GC	Wmin/max	11.0	60.0
APE.LM	PMOSE	GC-ANE	Lmin/max	2.0	30.0
APE.AN	APE	AN	Smin	10.0	
APE.XY	APE	Bevel	XYmin	1.4	
APE.CO	APE	CO	Smin	2.0	
ANE.WM	NMOSE	ANE-GC	Wmin/max	11.0	60.0
ANE.LM	NMOSE	GC-ANE	Lmin/max	2.0	30.0
ANE.AP	ANE	AP	Smin	10.0	
ANE.XY	ANE	Bevel	XYmin	1.4	
ANE.CO	ANE	CO	Smin	2.0	
COE.W1	CO(E)		Wfix	3.0	3.0
COE.S1	CO(E)	CO	Smin	1.6	
CDE.GC	CD(E)	GC	Smin	7.0	
CSE.GC	CS(E)	GC	Smin	3.0	
COE.AP	CO(E)	AP	Emin	4.0	
COE.AN	CO(E)	AN	Emin	4.0	

APE/ANE : AP/AN on ESD

CO (E) : CO on ESD

Cat-8: PAD related

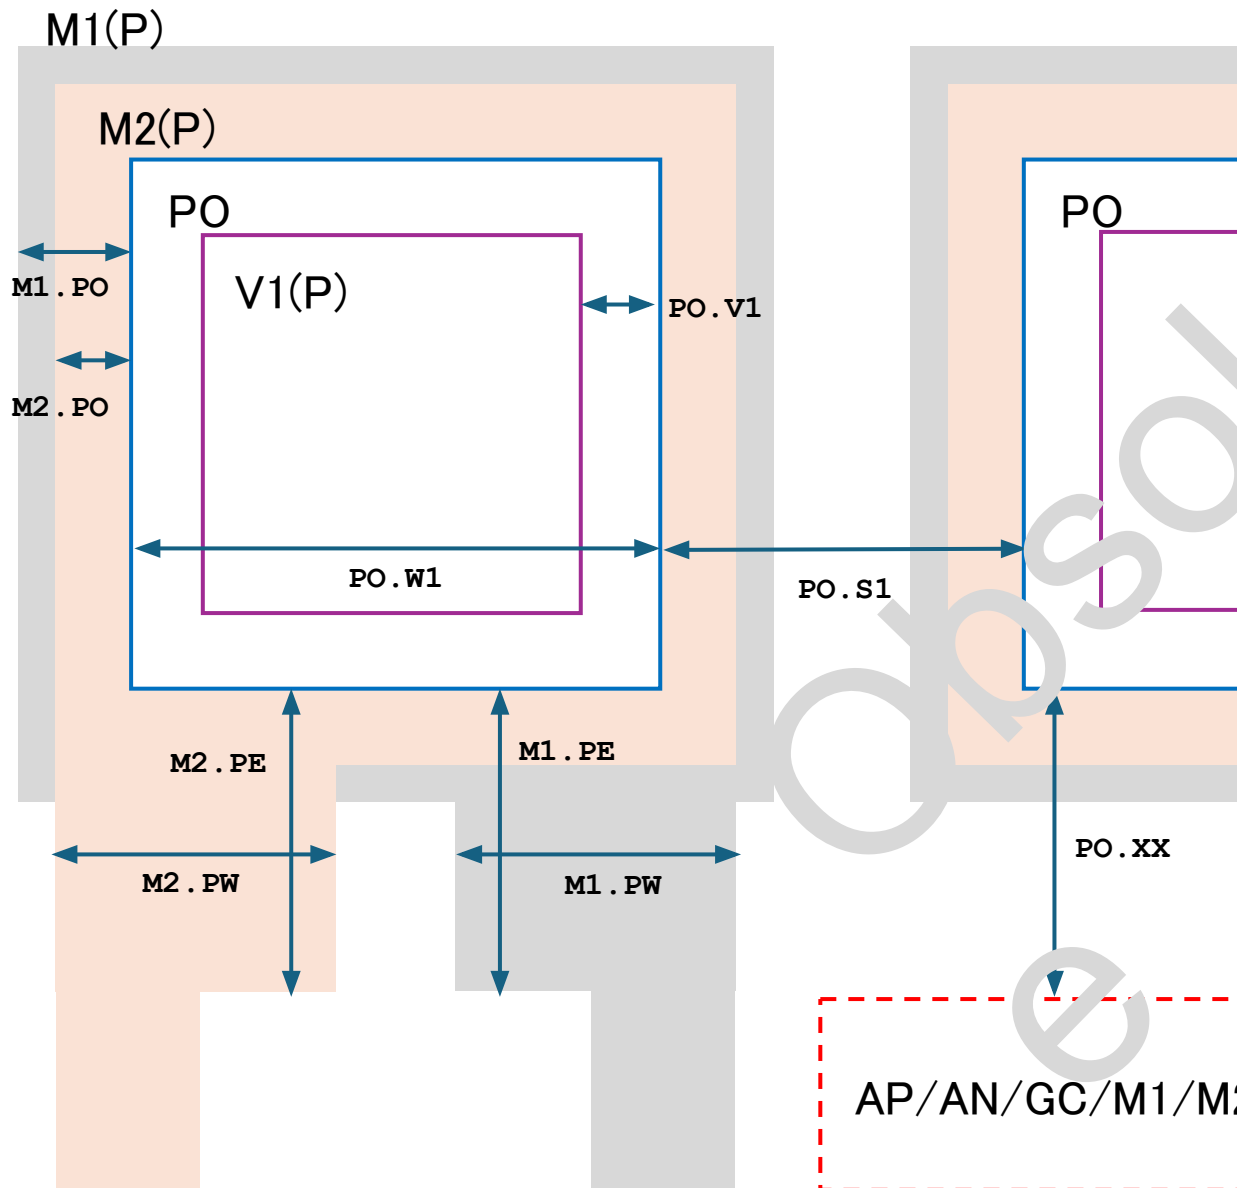

Rule	L1	L2	Func	MIN	MAX
PO.W1	PO		Wmin	70.0	
PO.S1	PO	PO	Smin	64.0	
M2.PO	M2 (P)	PO	Fmin	5.0	
M1.PO	M1 (P)	PO	Fmin	5.0	
PO.V1	PO	V1 (P)	Emin	10.0	
PO.AP	PO	AP	Smin	14.0	
PO.AN	PO	AN	Smin	14.0	
PO.GC	PO	GC	Smin	14.0	
PO.M1	PO	M1	Smin	14.0	
PO.M2	PO	M2	Smin	14.0	
M2.PE	M2		EXTL	19.0	
M2.PW	M2		EXTW	40.0	
M1.PE	M2		EXTL	19.0	
M1.PW	M2		EXTW	40.0	

**** Not yet implemented**

M1 (P) : M1 covering P0

M2 (P) : M2 covering PO

V1 (P) : V1 through M1 (P) -M2 (P)


Obsolete slides

2026/06/11


Reflected GitHub issues

<https://github.com/OpenSUSI/TR-1um/issues>

Cat-1: Prohibited

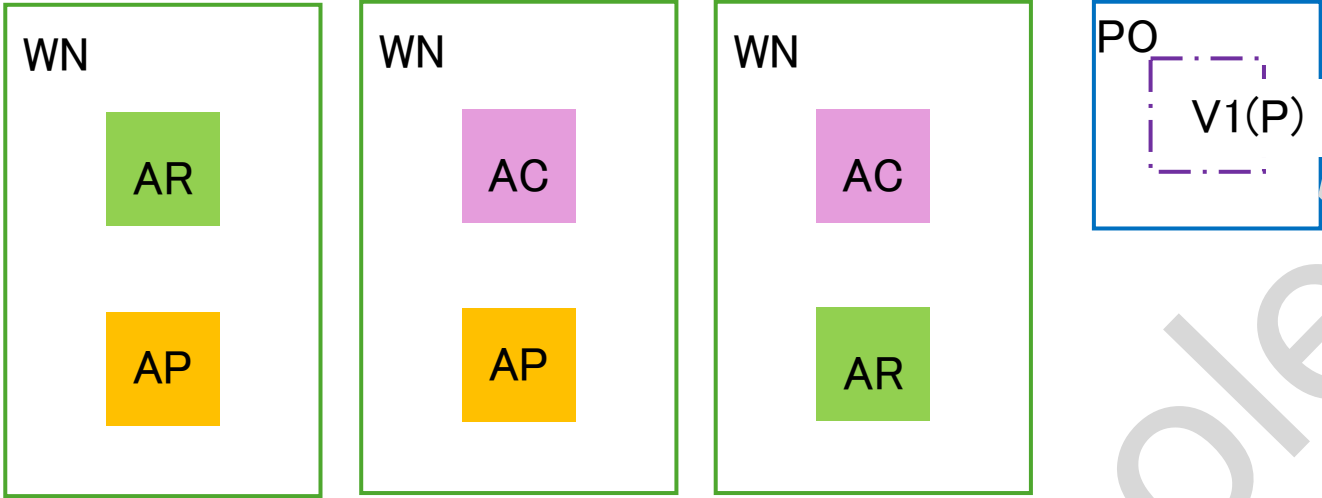

Rule	L1	L2	Func	MIN	MAX
WN.Z1	WN(R)	AP	None	0.0	
WN.Z2	WN(C)	AP	None	0.0	
WN.Z3	WN(C)	AR	None	0.0	
CO.Z1	CO	AA+GC+GR	None	0.0	
CO.Z3	CO	M1	None	0.0	
V1.Z1	V1	M1	None	0.0	
V1.Z2	V1	M2	None	0.0	
PO.Z1	PO	M1	None	0.0	
PO.Z2	PO	M2	None	0.0	
PO.Z3	PO	V1(P)	Exist	0.0	

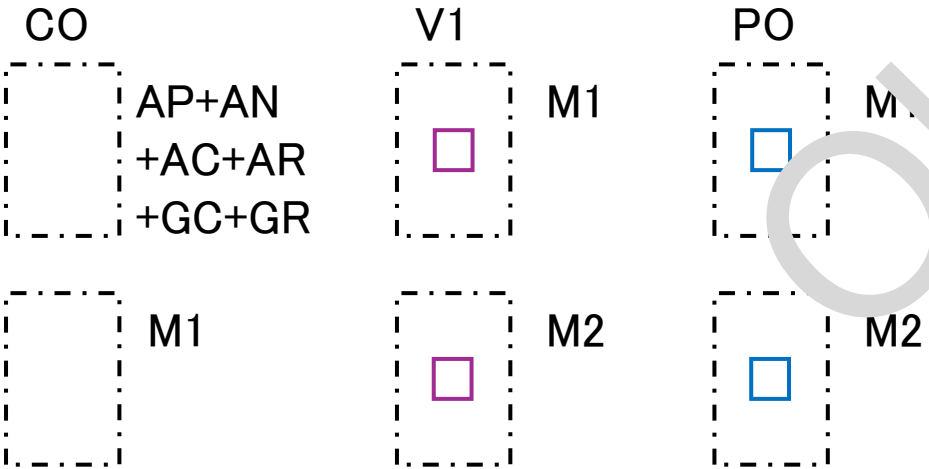


Function:

Wmin/max: L1 Width min/max
Smin/max: L1 Space min/max (L1=L2)
Smin/max: L1 Separate L2 min/max
Emin/max: L1 Enclosed L2 min/max
Fmin/max: L1 Enclosing L2 min/max
ECmin: MOS Endcap min
Wfix: L1 Windth equal
Sfix: Space equal
Donut: L1 Souuounded by L2
None: Not Exist

V1 (P) : V1 on PE


Cat-2: WN to AP/AN/AR/AC related

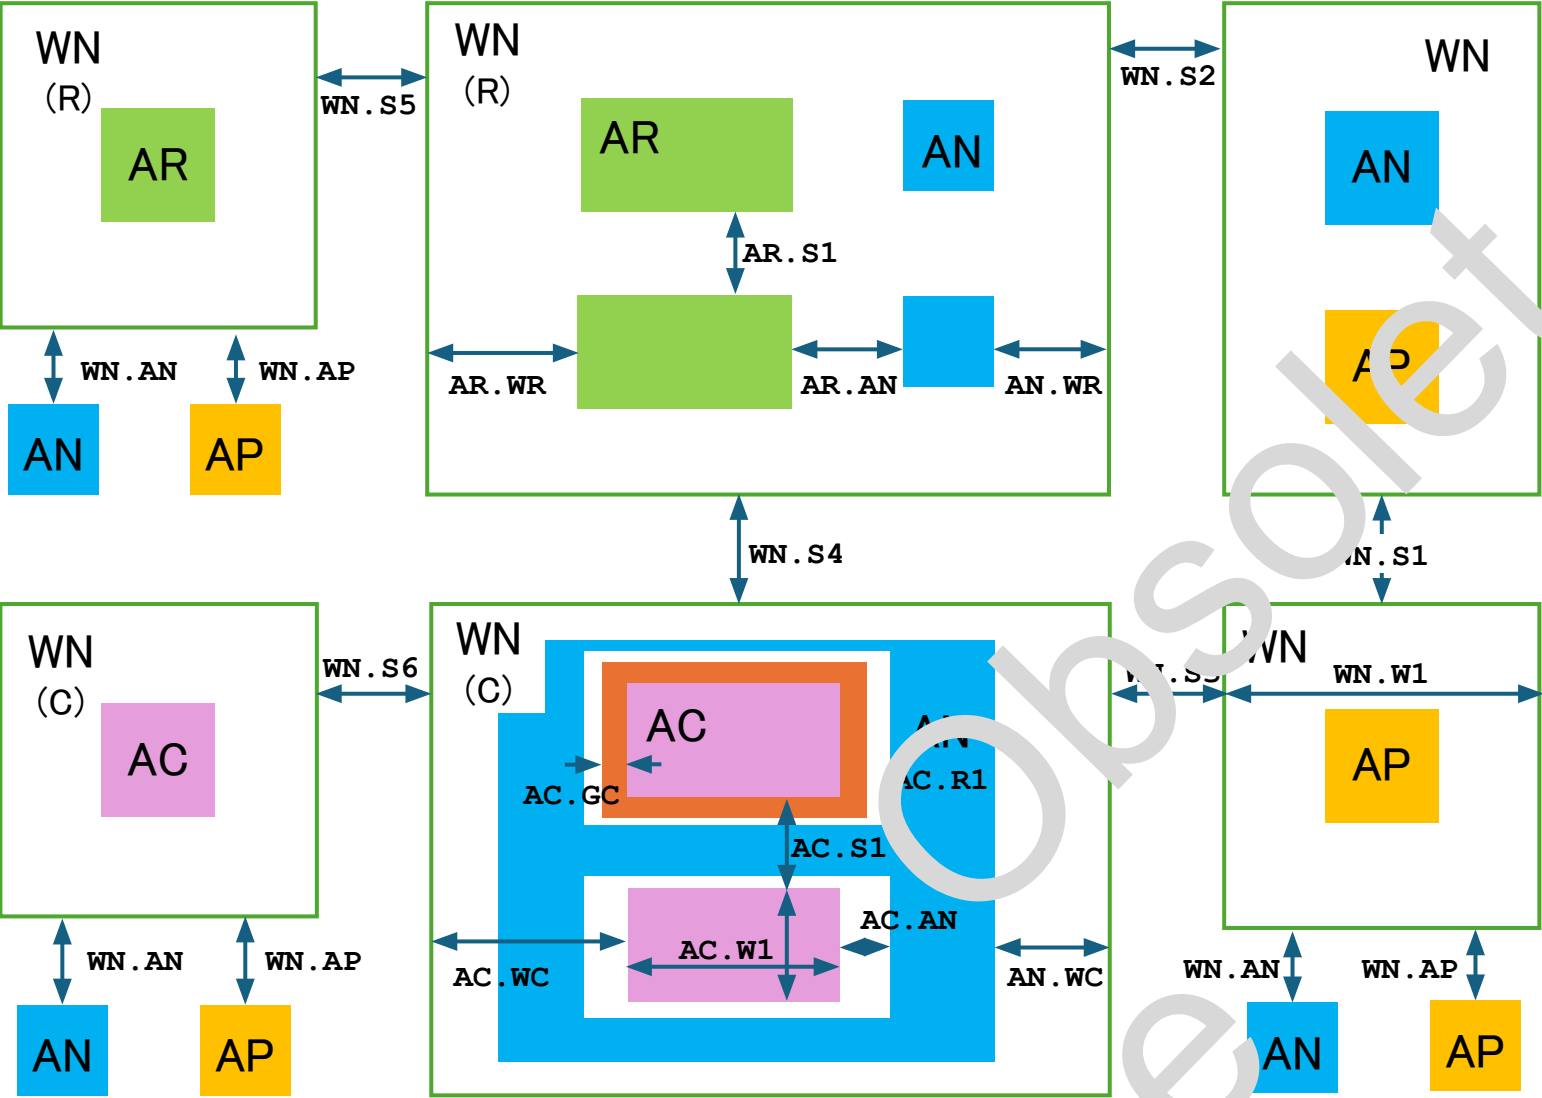

Rule	L1	L2	Func	MIN	MAX
WN.W1	WN		Wmin	8.0	
WN.S1	WN	WN	Smin	12.0	
WN.S2	WN	WN(R)	Smin	9.5	
WN.S3	WN	WN(C)	Smin	12.0	
WN.S4	WN(R)	WN(C)	Smin	9.5	
WN.S5	WN(R)	WN(R)	Smin	8.0	
WN.S6	WN(C)	WN(C)	Smin	12.0	
WN.AP	WN	AP	Smin	5.0	
WN.AN	WN	AN	Smin	10.0	
AR.S1	AR	AR	Smin	4.0	
AR.WR	AR	WN(R)	Emin	10.0	
AN.WR	AN	WN(R)	Emin	5.0	
AR.AN	AR	AN	Smin	4.0	
AC.W1	AC		Wmin/max	28.5	120.0
AC.S1	AC	AC	Smin	6.4	
AC.WC	AC	WN(C)	Emin	8.0	
AN.WC	AN	WN(C)	Emin	3.0	
AC.AN	AC	AN	Sfix	2.8	2.8
AC.GC	AC	GC	Efix	1.4	1.4
AC.R1	AC	AN(C)	Donut	0.0	

WN(R) : WN overlapped AR
WN(C) : WN overlapped AC
AN(C) : AN in WN(C)


Cat-3: MOS transistor related

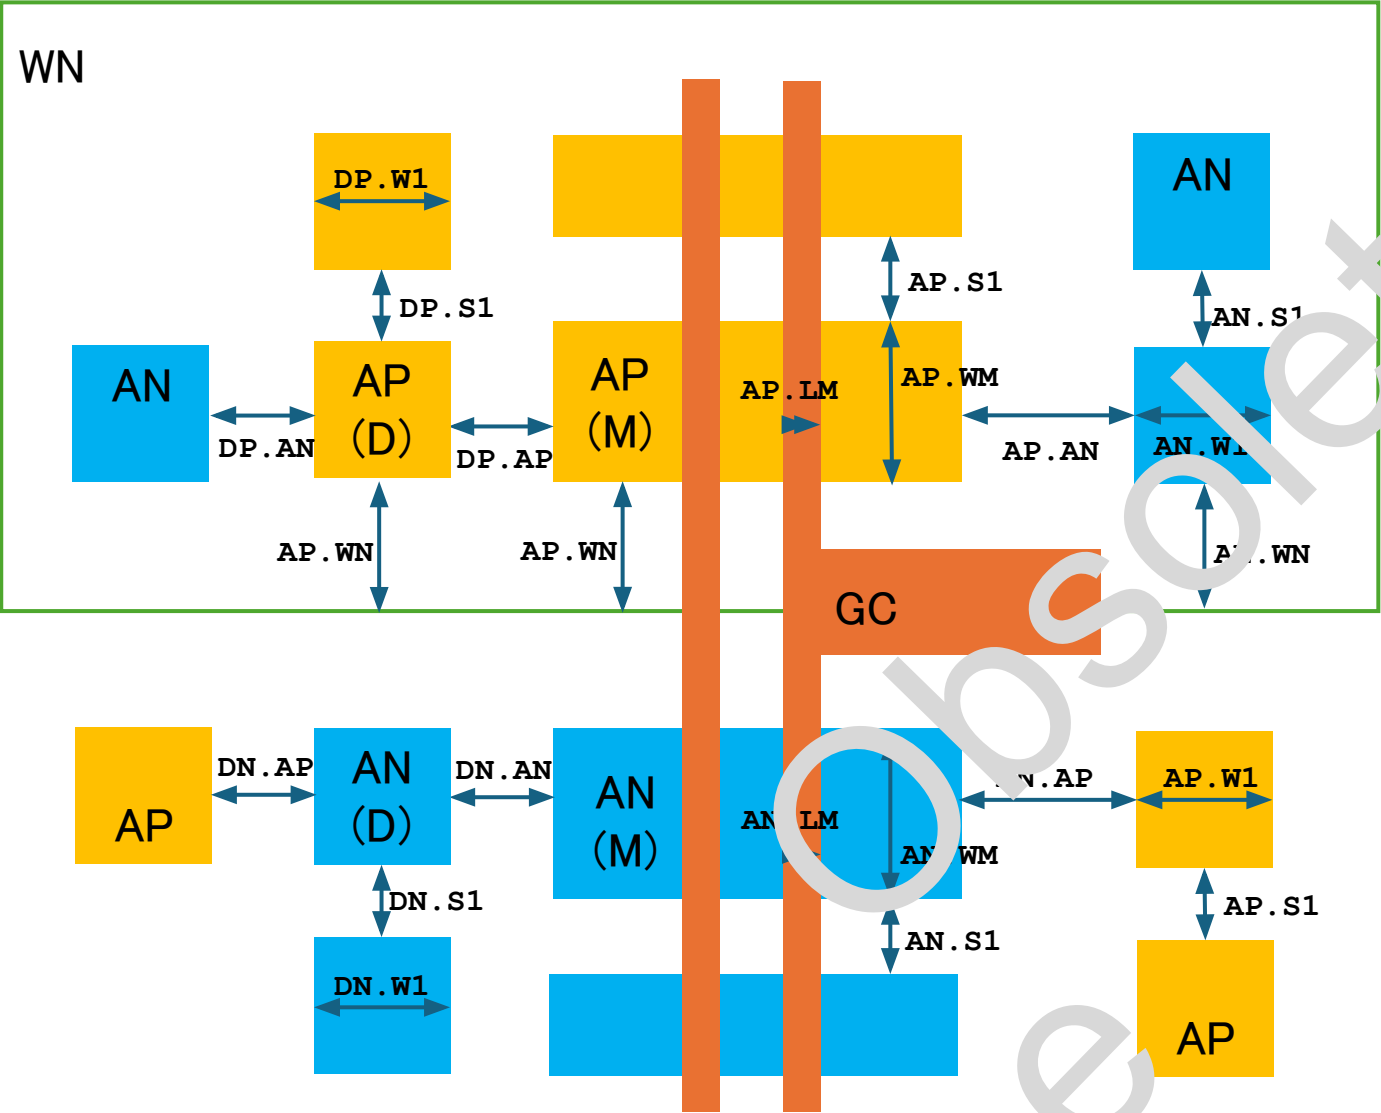

Rule	L1	L2	Func	MIN	MAX
AP.W1	AP		Wmin	1.4	
AP.S1	AP	AP	Smin	1.4	
AP.AN	AP	AN	Smin	2.8	
AP.WM	PMOS	AP-GC	Wmin/max	3.4	60.0
AP.LM	PMOS	GC-AN	Lmin/max	1.0	30.0
AP.WN	AP	WN	Emin	7.0	
DP.W1	DP		Wmin	2.8	
DP.S1	DP	DP	Smin	1.4	
DP.AP	DP	AP(M)	Smin	2.8	
DP.AN	DP	AN	Smin	2.8	
AN.W1	AN		Wmin	1.4	
AN.S1	AN	AN	Smin	1.4	
AN.AP	AN	AP	Smin	2.8	
AN.WM	NMOS	AN-GC	Wmin/max	3.4	60.0
AN.LM	NMOS	GC-AN	Lmin/max	1.0	30.0
AN.WN	AN	WN(M)	Emin	5.0	
DN.W1	DN		Wmin	2.8	
DN.S1	DN	DN	Smin	1.4	
DN.AP	DN	AP	Smin	2.8	
DN.AN	DN	AN(M)	Smin	2.8	

AN (M) : AN-DN
AP (M) : AP-DP
WN (M) : WN overlapped AN/AP





Cat-4: Contact and Poly related

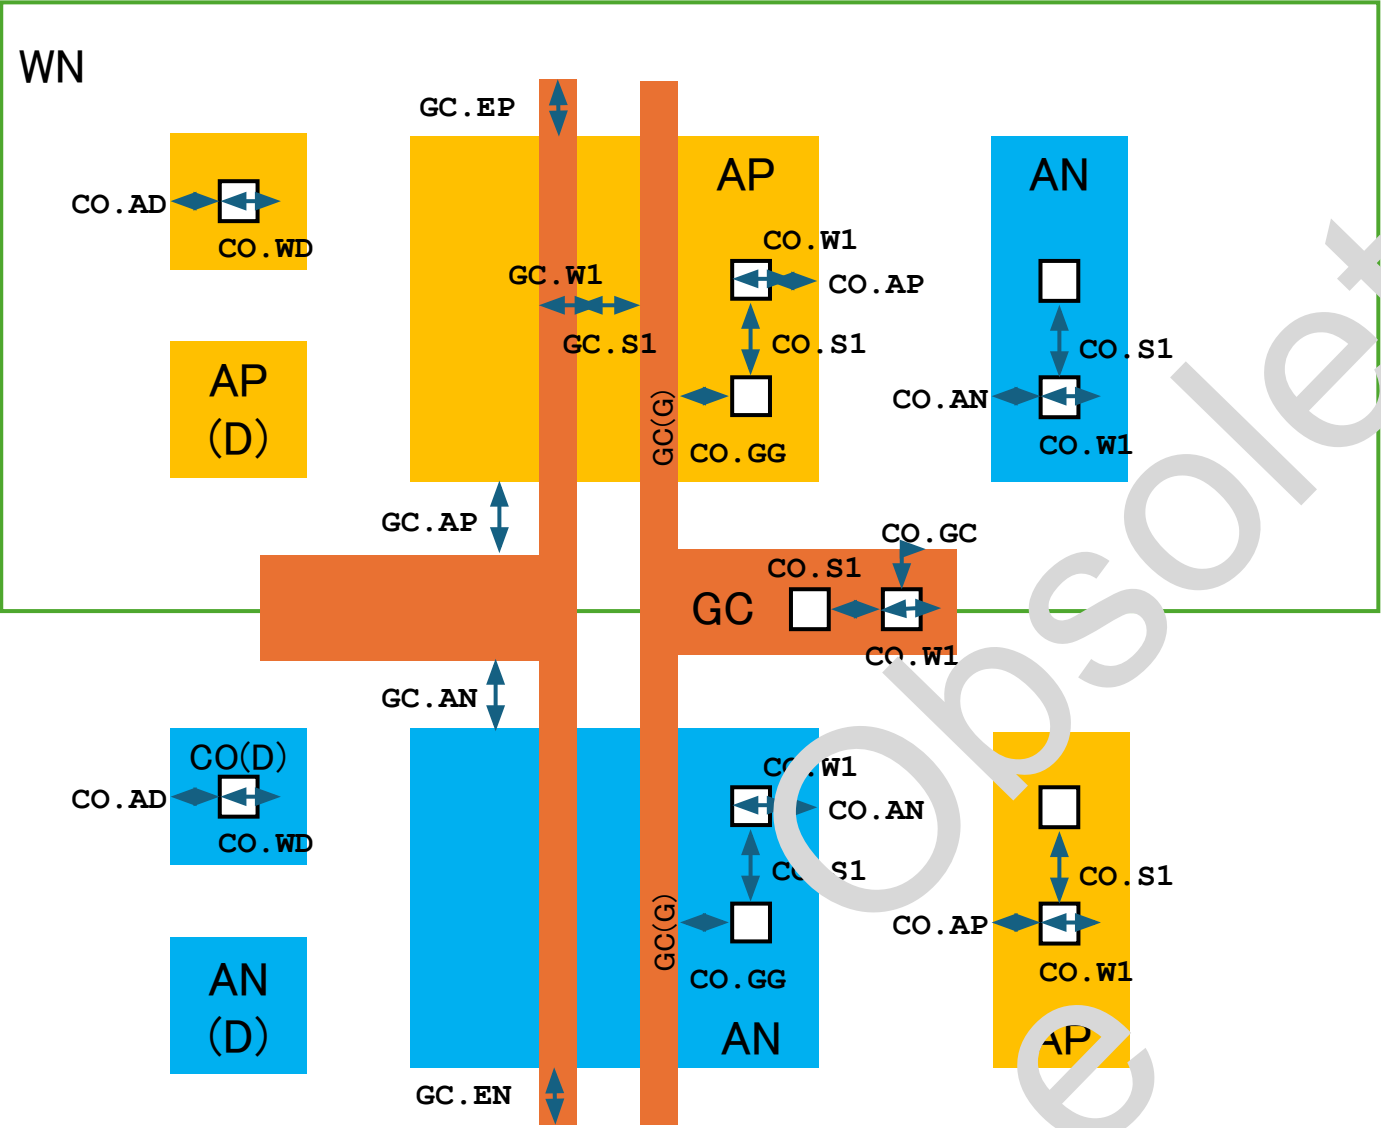

Rule	L1	L2	Func	MIN	MAX
GC.W1	GC		Wmin	1.0	
GC.S1	GC	GC	Smin	1.2	
GC.AP	GC	AP	Smin	0.4	
GC.AN	GC	AN	Smin	0.4	
GC.EP	PMOS	GC	ECmin	1.2	
GC.EN	NMOS	GC	ECmin	1.2	
CO.W1	CO		Wfix	1.0	1.0
CO.S1	CO	CO	Smin	1.0	
CO.WD	CO(D)		Wfix	1.2	1.2
CO.AD	CO(D)	AP+AN	Emin	1.2	
CO.AP	CO	AP	Emin	0.8	
CO.AN	CO	AN	Emin	0.8	
CO.GG	CO	GC(G)	Smin	1.0	
CO.GC	CO	GC+GR	Emin	0.8	

AP(D) : AP not interacted GC
AN(D) : AN not interacted GC
CO(D) : CO on AP(D) /AN(D)
GC(G) : GC for PMOS/NMOS

Cat-5: Resistor(AR/RS) and Capacitor(AC) related

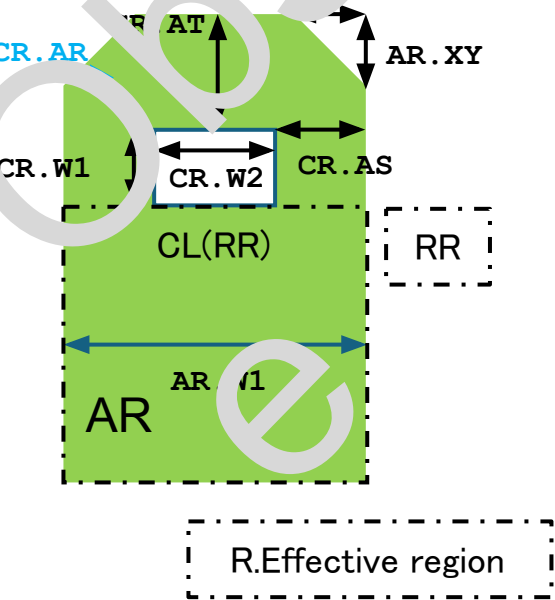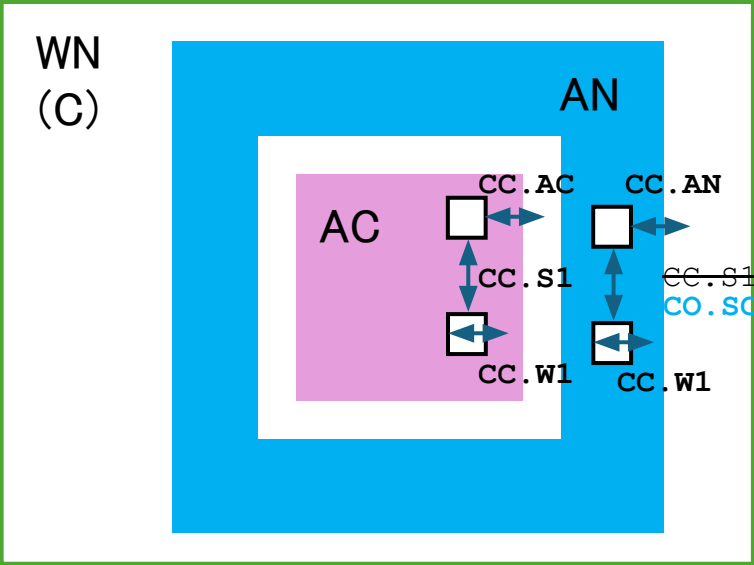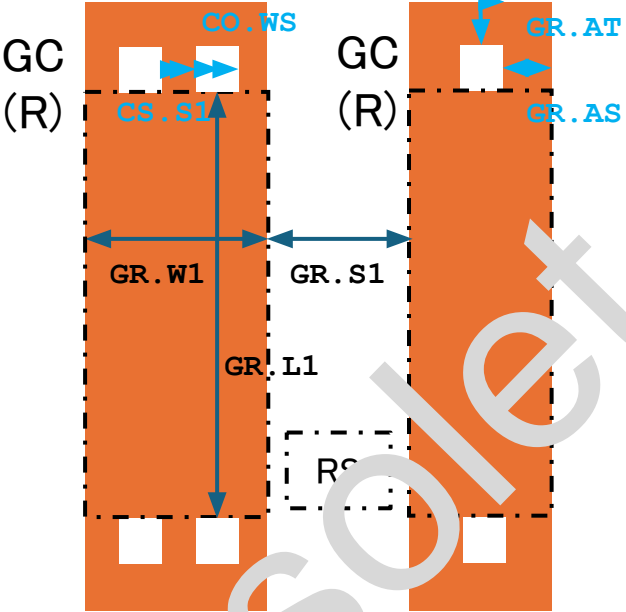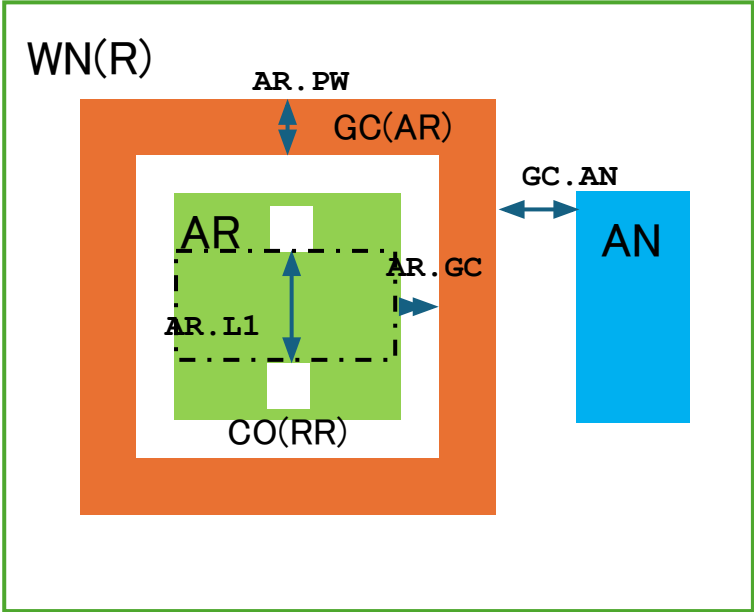


Rule	L1	L2	Func	MIN	MAX
AR.W1	RR	RR(L)	Wmin/max	2.8	20.0
AR.WF	AR	ARF	Require		
AR.L1	RR	RR(W)	Lmin/max	13.0	100.0
AR.GC	GC	AR	Smin	1.0	
AR.PW	GC(R)		Wmin	2.0	
AR.XY	AR	Bevel	XYmin	1.0	
GC.AN	GC(R)	AN	Smin	???	???
GC.R1	AR	GC(R)	Donut	0.0	
GC.R2	GC(R)	WN(R)	TieDown	0.0	
GR.W1	RS	RS(L)	Wmin/max	4.0	20.0
GR.L1	RS	RS(W)	Lmin/max	20.0	100.0
GR.S1	RS	RS	Smin	2.0	
CR.W1	CO(RR)		Wmin	1.0	
CR.W2	CL(RR)		Wmin/max	1.0	20.0
CR.AR	CO(RR)	AR	Emin	0.8	
CR.AT	CO(RR)	AR(T)	Emin	1.5	
CR.AS	CO(RR)	AR(S)	Efix	0.9@W=2. 1.2@W=>4 8	
CC.W1	CO(C)		Wfix	1.2	1.2
CC.S1/CO.S C	CO(C)	CO(C)	Sfix/Smin	1.2	1.2
CC.AC	CO(C)	AC	Emin	2.9	
CC.AN	CO(C)	AN	Emin	1.2	
CO.WS	CO(S)		Wfix	1.0	1.0
CS.S1	CO(RS)	CO(RS)	Sfix	1.0	1.0
GR.AT	CO(RS)	GR(T)	Efix	0.8	0.8
GR.AS	CO(RS)	GR(S)			

CO(C) : CO on AC
CO(S) : Small(1um□) CO
CO(RR) : CO short side on AR
CL(RR) : CO long side on AR
AR(T) : AR top fringe
AR(S) : AR side fringe
AR.W1 : allow only 2.8,4,6,12,20
GR.W1 : allow only 4,6,12,20

CO(C) : CO on AC
CO(S) : Small(1um□) CO
CO(RS) : CO on GR
GR(T) : GR top fringe
GR(S) : GR side fringe


Cat-6: M1/V1/M2 related

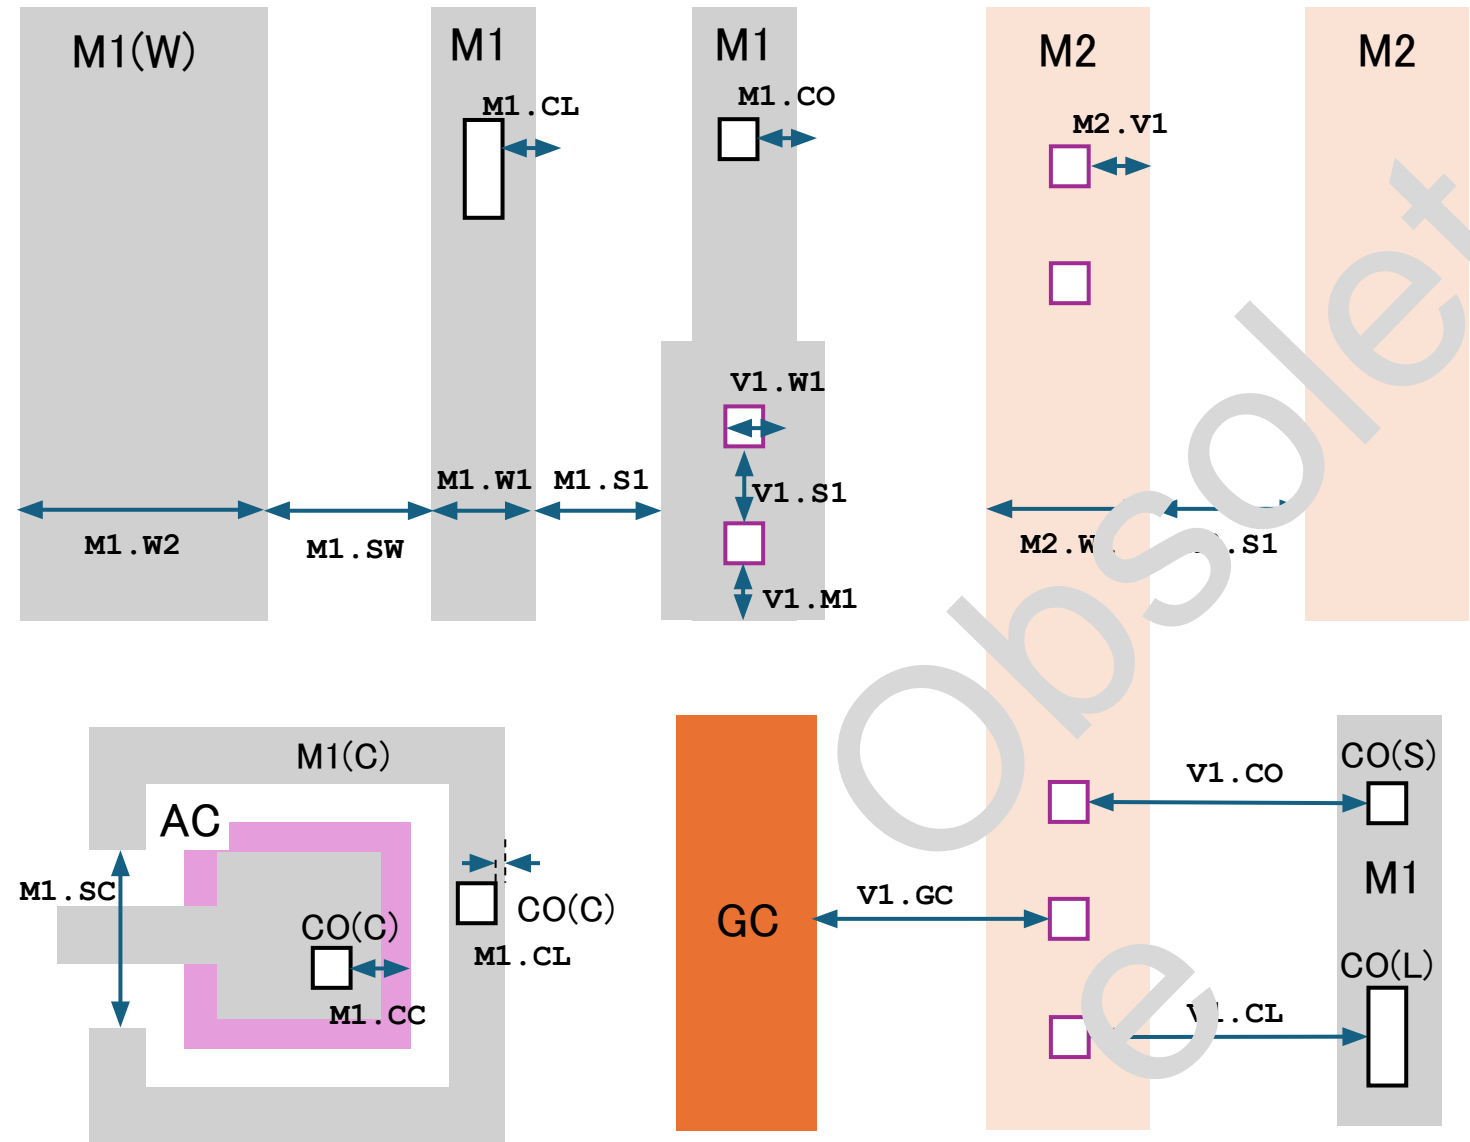

Rule	L1	L2	Func	MIN	MAX
M1.W1	M1		Wmin/max	1.8	10.0
M1.W2	M1(W)		Wmin	10.0	
M1.S1	M1	M1	Smin	1.4	
M1.SC	M1(C)	M1(C)	Sfix	10.0	10.0
M1.CO	M1	CO(S)	Fmin	0.8	
M1.CC	M1	CO(C)	Fmin	1.3	
M1.CL	M1	CO(L)	Fmin	1.2	
M1.SW	M1(W)	M1	Smin	2.0	
V1.W1	V1		Wfix	1.4	1.4
V1.S1	V1	V1	Smin	1.5	
V1.M1	V1	M1	Emin	1.0	
V1.GC	V1	GC	Smin	1.2	
V1.CO	V1	CO	Smin	1.0	
V1.CL	V1	CO(L)	Smin	1.4	
M2.W1	M2		Wmin	3.0	
M2.S1	M2	M2	Smin	2.0	
M2.V1	M2	V1	Fmin	1.0	

M1 (C) : M1 in WN(C)
CO(C) : CO on AC
CO(S) : CO small contact
CO(L) : CO large contact (only on AR)
M1(W) : Wide M1


Cat-7: ESD MOS transistor related

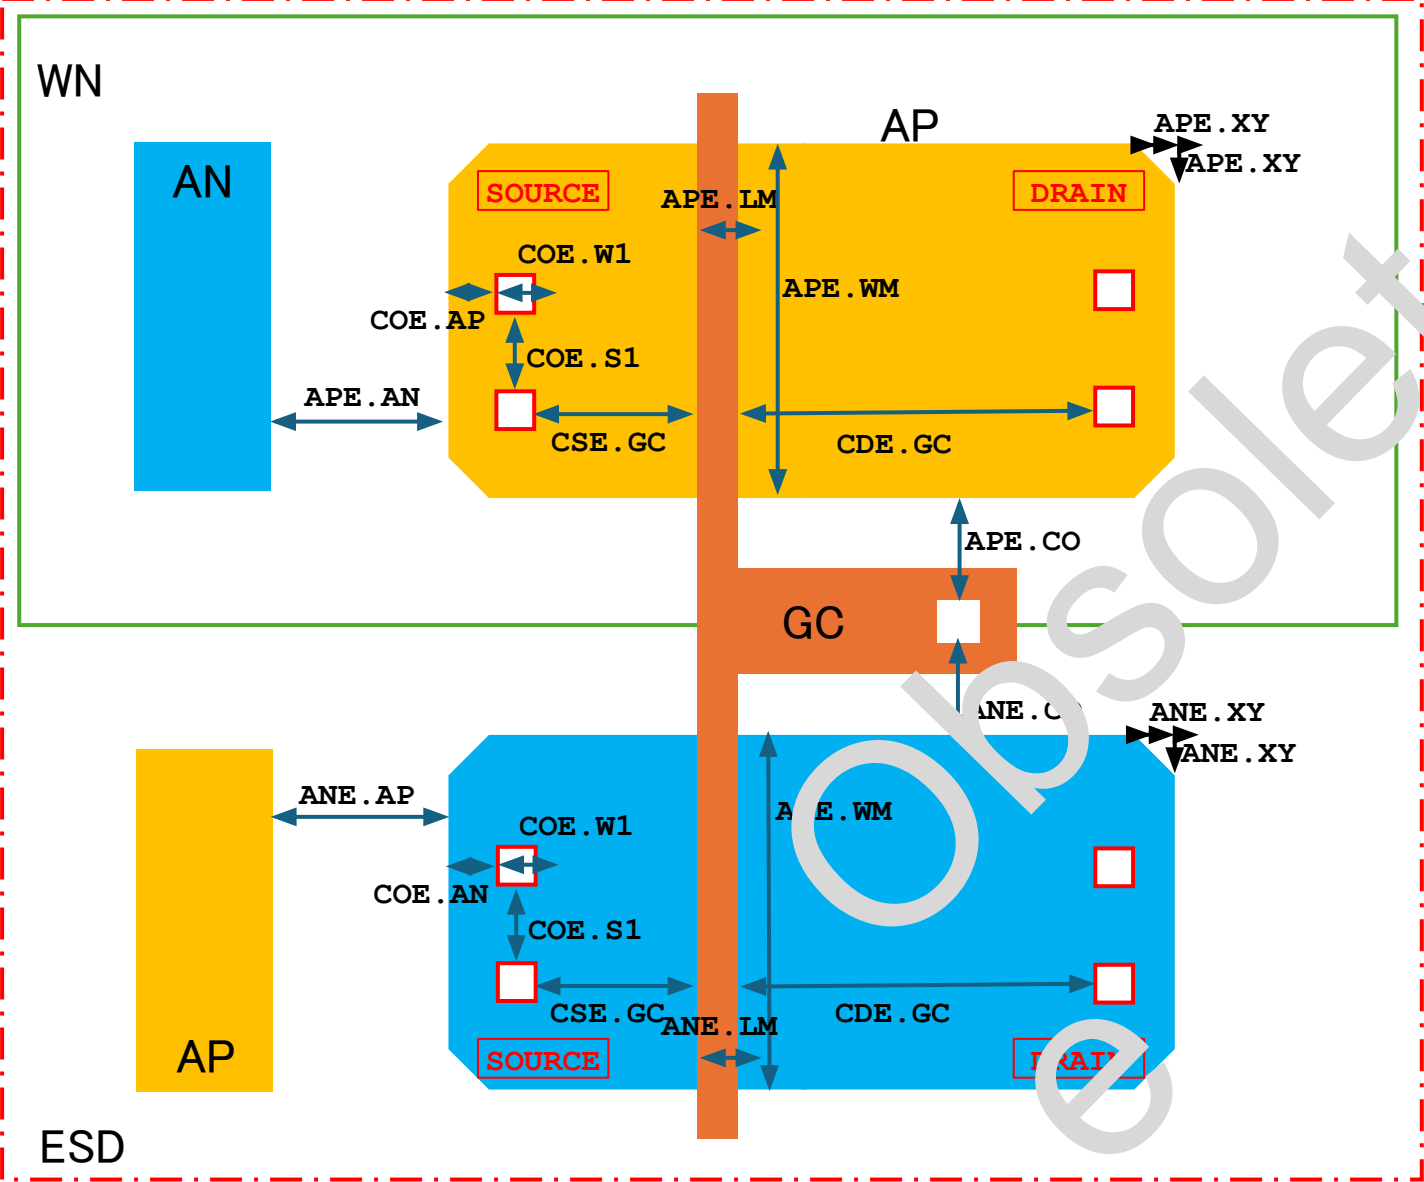

Rule	L1	L2	Func	MIN	MAX
APE.WM	PMOSE	APE-GC	Wmin/max	11.0	60.0
APE.LM	PMOSE	GC-ANE	Lmin/max	2.0	30.0
APE.AN	APE	AN	Smin	10.0	
APE.XY	APE	Bevel	XYmin	1.4	
APE.CO	APE	CO	Smin	2.0	
ANE.WM	NMOSE	ANE-GC	Wmin/max	11.0	60.0
ANE.LM	NMOSE	GC-ANE	Lmin/max	2.0	30.0
ANE.AP	ANE	AP	Smin	10.0	
ANE.XY	ANE	Bevel	XYmin	1.4	
ANE.CO	ANE	CO	Smin	2.0	
COE.W1	CO(E)		Wfix	3.0	3.0
COE.S1	CO(E)	CO(E)	Smin	1.6	
CDE.GC	CD(E)	GC	Smin	7.0	
CSE.GC	CS(E)	GC	Smin	3.0	
COE.AP	CO(E)	AP	Emin	4.0	
COE.AN	CO(E)	AN	Emin	4.0	

APE/ANE) : AP/AN on ESD)
CO (E) : CO on ESD

Cat-8: PAD related

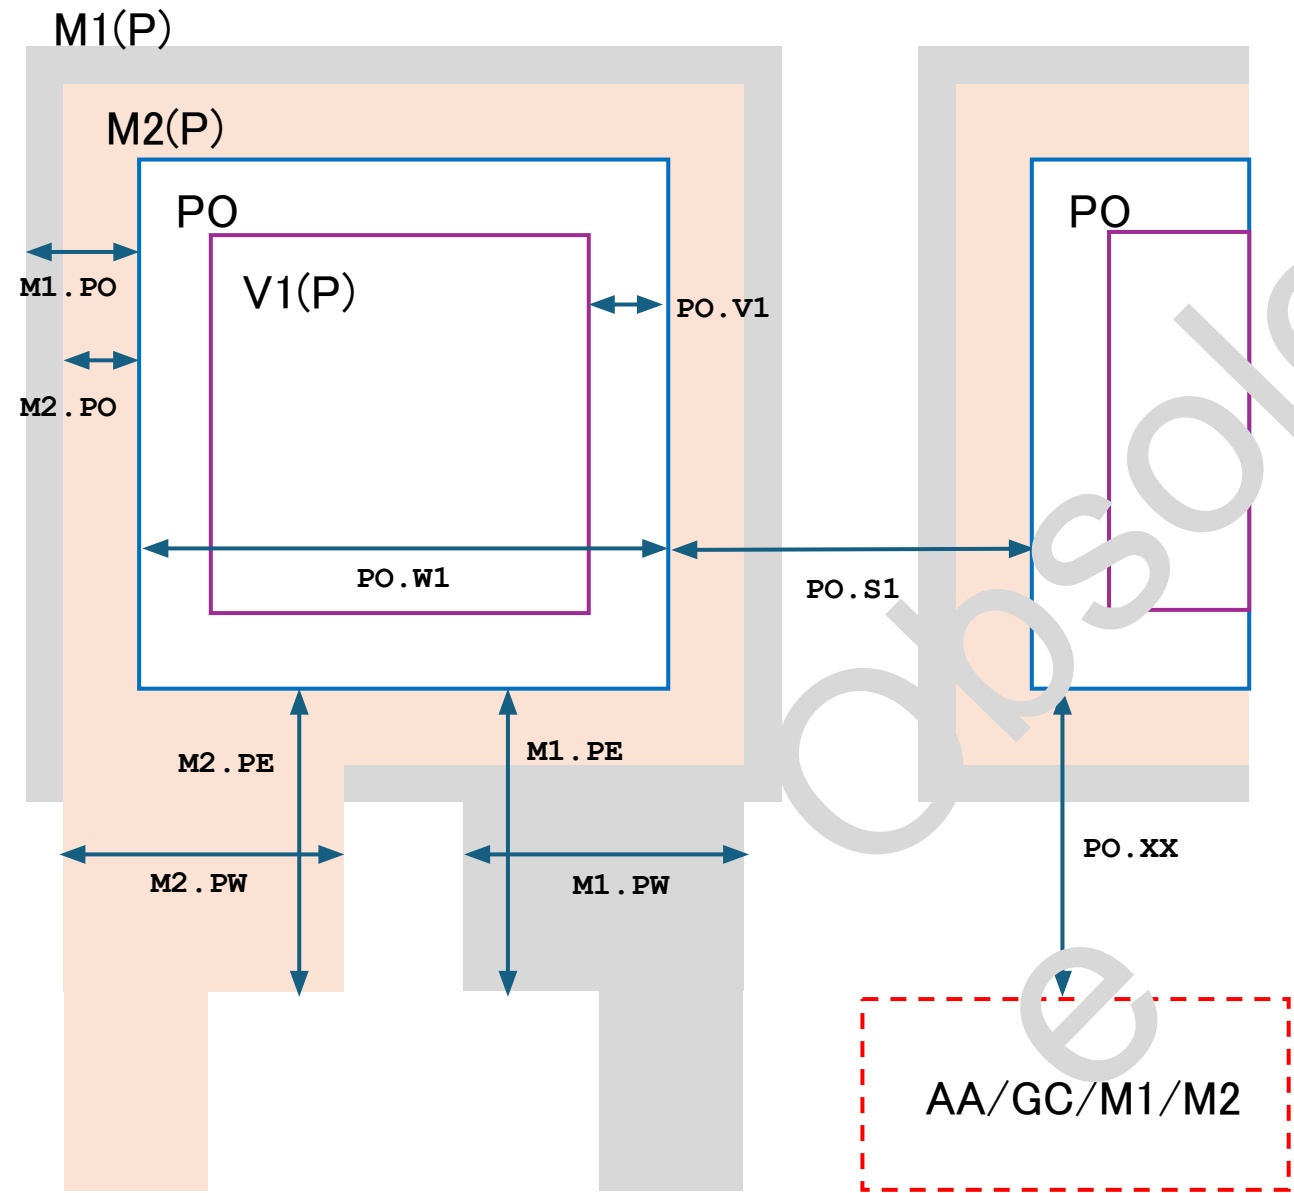

Rule	L1	L2	Func	MIN	MAX
PO.W1	PO		Wmin	70.0	
PO.S1	PO		Smin	64.0	
M2.PO	M2 (P)	PO	Fmin	5.0	
M1.PO	M1 (P)	PO	Fmin	5.0	
PO.V1	PO	V1 (P)	Emin	10.0	
PO.AP	PO	AP	Smin	14.0	
PO.AN	PO	AN	Smin	14.0	
PO.GC	PO	GC	Smin	14.0	
PO.M1	PO	M1	Smin	14.0	
PO.M2	PO	M2	Smin	14.0	
M2.PE	M2	Extention		19.0	
M2.PW	M2	Extention	Wmin	40.0	
M1.PE	M2	Extention		19.0	
M1.PW	M2	Extention	Wmin	40.0	

**** Not yet implemented**

M1 (P) : M1 on PO
M2 (P) : M2 on PO
V1 (P) : V1 on PO