

THE PLATFORM

The open, safety-engineered power-conversion platform

Developed in the Smart Power Lab at UC Santa Cruz, OpenVVF is built on a bench-tested dual-MCU control architecture. A reusable control module connects to swappable power stages from approximately 50 kW to the megawatt class for motor drives and DC/DC conversion, with SiC-ready designs and a common software workflow.

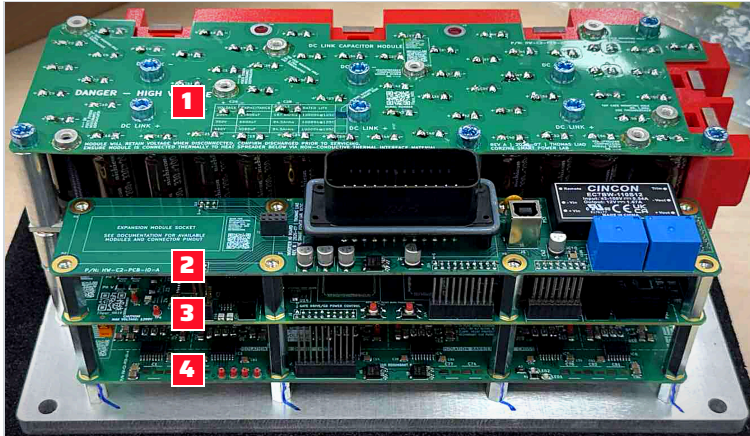


Fig. 1: The Size 2 stack, top to bottom: capacitor board, I/O board, control board, and gate-drive board.

COOLING

Three IGBT half-bridge modules are conduction-cooled through an aluminum baseplate, with no liquid-cooling loop. The same chassis also provides a path to future motorcycle testing.

SOFTWARE AND OPEN WORKFLOW

The same control core is intended to run across power stages. It supports self-commissioning for PMSM and induction machines, the open-source RTE Studio model-based workflow, and the browser-based Telemetry Viewer. Schematics, firmware, safety analyses, assembly data, and test evidence are public at docs.openvvvf.org.




Fig. 2: Ceramic capacitors between the IGBT terminals. The commutation loop measures only a few millimeters.

MODULAR POWER ARCHITECTURE

Reusable control, scalable power stages

CONTROL MODULE		POWER STAGE	
Dual-MCU control · FOC · independent safety		Gate-driver boards · capacitor boards · IGBT or SiC modules	
	Size 1 Approximately 50 kW class for light EVs and scalable designs ■ EARLY DESIGN		Size 2 inverter 200–450 V class · 465 A continuous design rating ■ IMPLEMENTED, UNDER TEST
			Size 2 DC/DC 15 kW · 450 V class · reuses Size 2 boards and power stage ■ RELEASED DESIGN
			 Size 3 Up to 1,200 V · 1,400 A · modular liquid-cooled enclosure ■ IN DEVELOPMENT

EVIDENCE

Bench-tested, on the record

200-450 V Size 2 DC-bus class by capacitor selection	465 A Continuous design rating · 600 A peak (60 s)	10 Published test reports, raw telemetry linked	PMSM + induction Instrument-verified motor self-commissioning
--	--	---	---

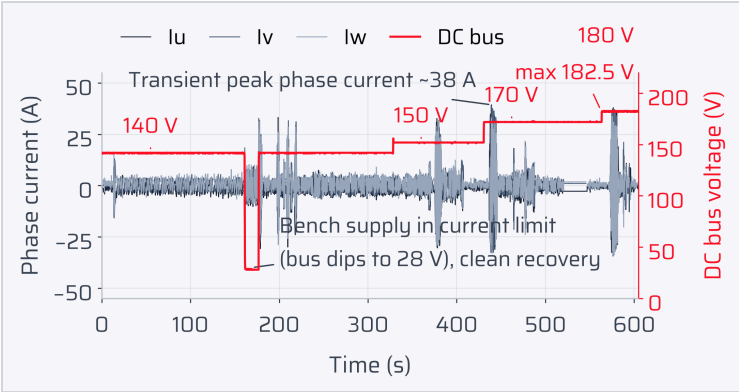


Fig. 3: The 180 V bring-up stepped the bus through 140, 150, 170, and 180 V. Maximum bus voltage was 182.5 V.

Live telemetry, not promises

The Size 2 chassis drove a 10 HP induction motor, reached approximately 38 A peak phase current, and recovered cleanly from a bench-supply current-limit event. All ten published reports link raw logs for the browser-based Telemetry Viewer.



Scan to open the 180 V bring-up and interactive telemetry.

TEST CAMPAIGN	SETUP	KEY RESULT
180 V power-stage bring-up	TECO 10 HP induction motor; bus stepped from 140 to 180 V	200 V-class operation confirmed; ≈38 A peak; clean fault recovery
One-hour no-load endurance	Size 2 + induction motor; 120 V DC; ≈60 Hz	60 minutes of continuous operation; zero faults; thermal baseline established
20-minute reversal stress at 180 V	±60 Hz every ≈45 s; passive cooling	26 reversals; zero faults; ≈41 A maximum
Self-commissioning accuracy	Inverter estimates versus LCR meter; PMSM + induction	Resistance error from -6.5 to +7.3 %; inductance error of +2.4 %

Six additional instrumented calibration reports support these results. All ten reports include raw telemetry and are revised publicly as validation continues.

SAFETY ENGINEERING

Six independent paths to the safe state

The control module is dual-MCU by design. The main MCU (STM32H723ZG) runs FOC motor control, plausibility checks, and fault handling. The safety coprocessor (STM32G474RCTx) independently monitors every safety-critical signal, cross-checks both CAN buses, and runs a challenge-response watchdog. Either processor can force the safe state.

Hardware PWM break (TIM1)	<100 ns	Shared driver RESET	<1 μs
1oo2 (one-out-of-two) gate-drive power kill	~10 μs	Independent coprocessor kill	<10 μs
Watchdog-forced main-MCU reset	~100 ms	Passive 3.3 V rail-loss pull-down	passive, no software


Highest-goal safety design target: the architecture applies ASIL B(D) decomposition, using two independent ASIL B channels to address an ASIL D goal. ISO 26262 methodology is a design input, not a certification claim. The functional-safety roadmap includes fault-injection, thermal, and vibration campaigns.

17 hazards identified	>	14 safety goals	>	22 functional safety requirements	>	92 fault-injection tests planned	>	ISO 26262 + IEC 61800-5-2 safe-function mapping
--------------------------	---	--------------------	---	--------------------------------------	---	-------------------------------------	---	---


Safety engineered from the silicon to the sheet metal.

Help move OpenVVF forward

OpenVVF is developed in the Smart Power Lab at UC Santa Cruz. Professor Keith Corzine leads the project, and Professor Leila Parsa is also a faculty contact. Hardware, firmware, safety engineering, assembly data, and test evidence are published openly so others can study, build, and extend the platform.

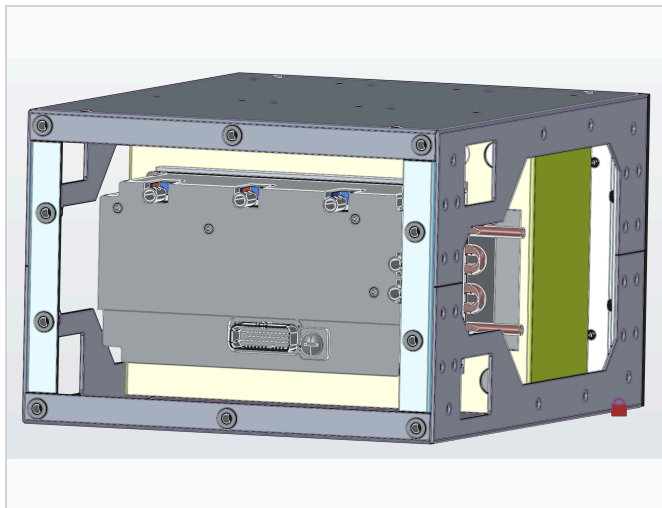

Size 2 DC/DC module: Released design rendering. The 15 kW converter reuses the Size 2 PCBs and power stage; orderable BOMs are available.

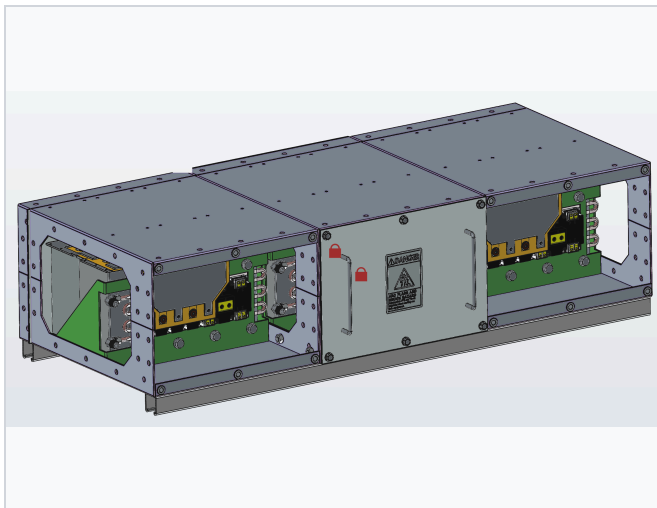

Size 3 high-power enclosure: Design rendering. The up-to-1,200 V, 1,400 A concept uses modular liquid-cooled bays; arc-flash containment analysis is in progress.

Next engineering work Gen 7.1 hardware · loaded testing · modular DC/DC conversion · reusable gate-driver and capacitor boards

WAYS TO HELP

PREFERRED FOR ONGOING DEVELOPMENT

Research gift

For supporters who want the lab to keep developing OpenVVF without a sponsor-defined statement of work. A gift through UC Santa Cruz can support student research time, components, fabrication, instruments, and testing where the team needs them most. Keith or Leila can confirm the correct designation.

A DEFINED PROJECT

Sponsored research

Funds a specific piece of work with an agreed scope, budget, schedule, and deliverables.

EQUIPMENT OR SERVICES

In-kind support

Power modules, components, fabrication, instruments, equipment loans, dynamometer time, or other test access.

Not sure which fits? Start with Keith or Leila. They can confirm the right gift designation or bring in the appropriate UC Santa Cruz contact for sponsored research or equipment.

SUPPORT THE SMART POWER LAB

Faculty and university contacts

Faculty: Keith Corzine, Keith@corzine.net / corzine@ucsc.edu; Leila Parsa, lparsa@ucsc.edu. University coordination: be-dev@ucsc.edu.

CURRENT SUPPORTERS



MOUSER
ELECTRONICS



MITSUBISHI
ELECTRIC



SendOutSend