GAUSSIAN ELIMINATION

LINEAR ALGEBRA

prepared by:

Gyro A. Madrona

Electronics Engineer

GRADING SYSTEM

FINAL GRADE

30%

PRELIM

30%

MIDTERM

40%

ENDTERM

TERM GRADE

70%

WEEKLY

30%

EXAM

WEEKLY GRADE

70%

LONG QUIZ

30%

SEATWORK

PENALTY

0

ABSENT

3

45-min LATE

7 max

15-min LATE

TOPIC OUTLINE

Reduced Row Echelon Form

Gaussian Elimination

REDUCED ROW ECHELON FORM

$$\begin{bmatrix} 1 & 0 & 0 & -\frac{8}{3} \\ 0 & 1 & 0 & -\frac{11}{3} \\ 0 & 0 & 1 & \frac{5}{3} \end{bmatrix}$$

If this matrix represents a system of linear equations in the variables x, y, z, what are the solutions to the system?

PROPERTIES

$$\begin{bmatrix} 1 & 0 & 0 & -\frac{8}{3} \\ 0 & 1 & 0 & -\frac{11}{3} \\ 0 & 0 & 1 & \frac{5}{3} \end{bmatrix}$$

Properties of matrix in reduced row echelon form (RREF):

1. **Leading 1s**

   Each leading 1 is the only nonzero entry in its column

2. **Descending Order**

   The position of the leading 1 shifts progressively to the right

3. **Zero Rows**

   Any rows consisting entirely of zeros are at the bottom of the matrix

Which of these matrices are in **RREF**?

$$\begin{bmatrix} 1 & 1 & 0 & 0 & 1 \\ 0 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 \end{bmatrix} \qquad \begin{bmatrix} 1 & 0 & 0 & 0 & 1 \\ 0 & 1 & 0 & 5 & 2 \\ 0 & 0 & 1 & 0 & 3 \end{bmatrix} \qquad \begin{bmatrix} 1 & 0 & 0 & 0 & 1 \\ 0 & 2 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 \end{bmatrix}$$

$$\begin{bmatrix} 1 & 2 & 0 & 0 & 1 \\ 0 & 0 & 0 & 1 & 7 \\ 0 & 0 & 1 & 0 & -1 \end{bmatrix} \qquad \begin{bmatrix} 1 & 0 & 1 & 0 & 1 \\ 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 \end{bmatrix} \qquad \begin{bmatrix} 1 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 3 \end{bmatrix}$$

GAUSSIAN ELIMINATION

Primary operations:

1. **Swapping Rows**

   Interchanging two rows to position a nonzero element

2. **Scaling Rows**

   Multiplying a row by a nonzero scalar to obtain a leading 1

3. **Row Addition/Subtraction**

   To create zeros

$$\begin{bmatrix} 2 & 1 & 4 & 15 \\ 1 & 2 & 2 & 10 \\ -2 & 1 & 1 & 3 \end{bmatrix}$$

Put the augmented matrix for the system of linear equations in **reduced row echelon form**.

$$-7a - 6b - 12c = -33$$

$$5a + 5b + 7c = 24$$

$$a + 4c = 5$$

Determine the voltages v_1, v_2 and v_3 of the given network.

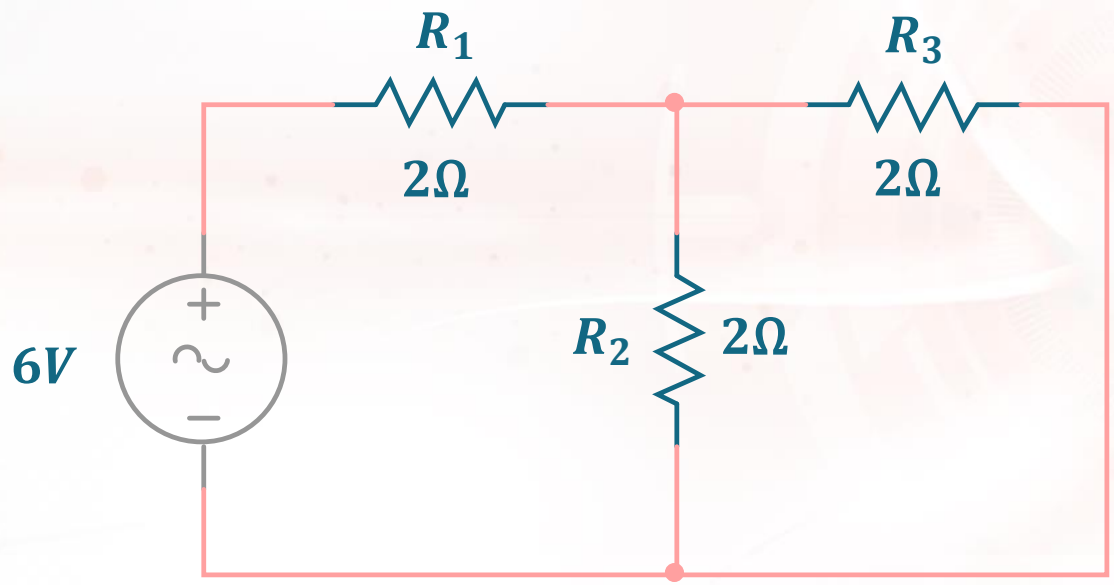

$$-\frac{v_1}{2} + \frac{v_2}{2} + \frac{v_3}{2} = 0$$

$$v_1 + v_2 + 0 = 6$$

$$0 - v_2 + v_3 = 0$$

SEATWORK