



Signals and Systems

Detailed Solutions

GATE Electrical Engineering

PrepFusionTM

Previous Year Questions Solutions

Contents

1.	Basics of Signals	1
2.	Basics of Systems	17
3.	Continuous Time Fourier Series	50
4.	Continuous Time Fourier Transform	64
5.	Laplace Transform	83
6.	Z Transform, DTFS and DTFT	95



SOLUTIONS



Basics of Signals

Topics

1. Basics of Signals and Mathematical Foundation
2. Step and Rectangular Signal
3. Ramp and Triangular Signal
4. Impulse Signal
5. Miscellaneous Signals
6. Complex Exponential Signal
7. Periodicity of a Signal
8. Orthogonality of Signals
9. Energy, Average and Power of a Signal
10. Even, Odd, Conjugate Symmetry Signals
11. Discrete-Time Signals and Their Types
12. Classification of Discrete-Time Signals

Q1.26.1
MCQ
2026
1M
Ans: D


Let the sampled sequence be

$$x[n] = x_c(nT_s).$$

For the discrete-time sequence to be periodic, there must exist a positive integer N such that

$$x[n + N] = x[n].$$

Since $x_c(t)$ is periodic with period T ,

$$x_c(nT_s + NT_s) = x_c(nT_s)$$

only if

$$NT_s = mT,$$

where m is a positive integer.

Hence,

$$\frac{T}{T_s} = \frac{N}{m}.$$

Since N and m are integers, $\frac{T}{T_s}$ must be a rational number.

Conversely, if

$$\frac{T}{T_s} = \frac{p}{q},$$

where p and q are integers with no common factor, then choosing

$$N = p$$

gives

$$NT_s = pT_s = qT,$$

which is an integer multiple of the continuous-time period. Therefore,

$$x[n + p] = x[n],$$

and the sequence is periodic.

Hence, $x[n]$ is periodic if and only if $\frac{T}{T_s}$ is rational.

(d) $x[n]$ will be periodic if and only if $\frac{T}{T_s}$ is a rational number.

Q1.25.1
MCQ
2025
1M
Ans: A


Using the sifting property of the unit impulse,

$$\int_{-\infty}^{\infty} x(t)\delta(t+3) dt = x(-3).$$

The given signal is

$$x(t) = -t^2 \{u(t+4) - u(t-4)\}.$$

At $t = -3$,

$$u(-3+4) - u(-3-4) = u(1) - u(-7) = 1 - 0 = 1.$$

Hence,

$$x(-3) = -(-3)^2(1) = -9.$$

Therefore,

$$\int_{-\infty}^{\infty} x(t)\delta(t+3) dt = -9.$$

(a) -9

Key Points

- Sifting property:

$$\int_{-\infty}^{\infty} x(t)\delta(t - t_0) dt = x(t_0).$$

Mistakes to be avoided

- Do not evaluate the signal at $t = 3$; $\delta(t + 3)$ samples at $t = -3$.

Q1.25.2

NAT

2025

1M

Ans: 7



The given signal is

$$x(t) = 1 + 2 \cos(2\pi t) + 2 \cos(4\pi t) + 2 \cos(6\pi t).$$

The fundamental period is

$$T = 1.$$

Using orthogonality of cosine functions over one period,

$$\frac{1}{T} \int_0^T |x(t)|^2 dt = \frac{1}{T} \int_0^T x^2(t) dt.$$

The DC component contributes

$$1^2 = 1.$$

Each cosine term contributes

$$\frac{(2)^2}{2} = 2.$$

Hence,

$$\frac{1}{T} \int_0^T |x(t)|^2 dt = 1 + 2 + 2 + 2 = 7.$$

Therefore,

$$\boxed{7}$$

Key Points

- Average power of a periodic signal is

$$P = \frac{1}{T} \int_0^T |x(t)|^2 dt.$$

- A cosine term $A \cos(\omega t)$ contributes $\frac{A^2}{2}$ to the average power.

Mistakes to be avoided

- Do not square each cosine term directly without using orthogonality.

Q1.24.1

NAT

2024

2M

Ans: 2



The energy of a continuous-time signal is

$$E = \int_{-\infty}^{\infty} |x(t)|^2 dt.$$

The transformed signal is

$$y(t) = 2x(2t - 1).$$

Using the time-shifting property, the shift by 1 does not affect the energy.

Amplitude scaling by 2 multiplies the energy by

$$2^2 = 4.$$

Time scaling by a factor of 2 changes the energy by

$$\frac{1}{2}.$$

Hence,

$$E_y = 4 \times \frac{1}{2} E = 2E.$$

Given that the energy of $2x(2t - 1)$ is cE ,

$$cE = 2E.$$

Therefore,

$$c = 2.$$

$$\boxed{2.0}$$

Key Points

- If $y(t) = Ax(at + b)$, then

$$E_y = \frac{|A|^2}{|a|} E.$$

- Time shifting does not change the energy of a signal.
- Amplitude scaling affects energy quadratically.

Q1.23.1

NAT

2023

2M

Ans: 48



The given discrete-time signal is

$$x[n] = 1 + 3 \sin\left(\frac{15\pi}{8}n + \frac{3\pi}{4}\right) - 5 \sin\left(\frac{\pi}{3}n - \frac{\pi}{4}\right).$$

The constant term is periodic for every integer N .

For a discrete-time sinusoid with frequency ω , the fundamental period is the smallest positive integer N satisfying

$$\omega N = 2\pi k, \quad k \in \mathbb{Z}.$$

For the first sinusoid,

$$\omega_1 = \frac{15\pi}{8},$$

$$N_1 = \frac{2\pi}{15\pi/8} k = \frac{16}{15} k.$$

The smallest integer value is obtained for $k = 15$:

$$N_1 = 16.$$

For the second sinusoid,

$$\omega_2 = \frac{\pi}{3},$$

$$N_2 = \frac{2\pi}{\pi/3} = 6.$$

Hence, the fundamental period of the sum is

$$N = \text{LCM}(16, 6) = 48.$$

Therefore,

$$\boxed{48}$$

Q1.20.1

MSQ

2020

1M

Ans: A,B,D



Use the orthogonality properties of trigonometric functions.

For Option A,

$$\sin(p\theta) \cos(q\theta) = \frac{1}{2} [\sin((p+q)\theta) + \sin((p-q)\theta)].$$

The average of sine over a symmetric interval is zero. Hence,

$$\lim_{a \rightarrow \infty} \frac{1}{2a} \int_{-a}^a \sin(p\theta) \cos(q\theta) d\theta = 0.$$

Therefore, **Option A is correct.**

For Option B,

$$\int_{-\pi}^{\pi} \sin(p\theta) \cos(q\theta) d\theta = 0$$

since $\sin(p\theta) \cos(q\theta)$ is an odd function for all real p, q . Hence, **Option B is correct.**

For Option C,

$$\sin(p\theta) \sin(q\theta) = \frac{1}{2} [\cos((p-q)\theta) - \cos((p+q)\theta)].$$

The integral over $[-\pi/2, \pi/2]$ is not zero for arbitrary real $p \neq q$. Hence, **Option C is incorrect.**

For Option D,

$$\sin(m\theta) \sin(n\theta) = \frac{1}{2} [\cos((m-n)\theta) - \cos((m+n)\theta)].$$

For non-zero integers $m \neq n$,

$$\int_{-\pi}^{\pi} \cos(k\theta) d\theta = 0, \quad k \neq 0.$$

Thus,

$$\frac{1}{2\pi} \int_{-\pi}^{\pi} \sin(m\theta) \sin(n\theta) d\theta = 0.$$

Hence, **Option D is correct.**

A, B and D

Key Points

- Orthogonality:

$$\int_{-\pi}^{\pi} \sin(m\theta) \sin(n\theta) d\theta = 0, \quad m \neq n.$$

Q1.20.2

MCQ

2020

1M

Ans: B



Let

$$y(t) = kx(t),$$

where k is a constant.

The average value of $x(t)$ is

$$x_A = \lim_{T \rightarrow \infty} \frac{1}{2T} \int_{-T}^T x(t) dt.$$

Hence,

$$y_A = \lim_{T \rightarrow \infty} \frac{1}{2T} \int_{-T}^T kx(t) dt = kx_A.$$

The RMS value of $x(t)$ is

$$x_R = \sqrt{\lim_{T \rightarrow \infty} \frac{1}{2T} \int_{-T}^T x^2(t) dt}.$$

Therefore,

$$y_R = \sqrt{\lim_{T \rightarrow \infty} \frac{1}{2T} \int_{-T}^T (kx(t))^2 dt} = \sqrt{k^2} x_R = |k| x_R.$$

Since the sign of k is not specified,

$$y_R \neq kx_R$$

for negative values of k .

Hence,

$$y_A = kx_A, \quad y_R \neq kx_R.$$

$$(b) y_A = kx_A; \quad y_R \neq kx_R$$

Q1.18.1

MCQ

2018

2M

Ans: A



The given continuous-time signals are

$$x_1(t) = |t|, \quad -1 \leq t \leq 1$$

$$x_2(t) = 1 - |t|, \quad -1 \leq t \leq 1$$

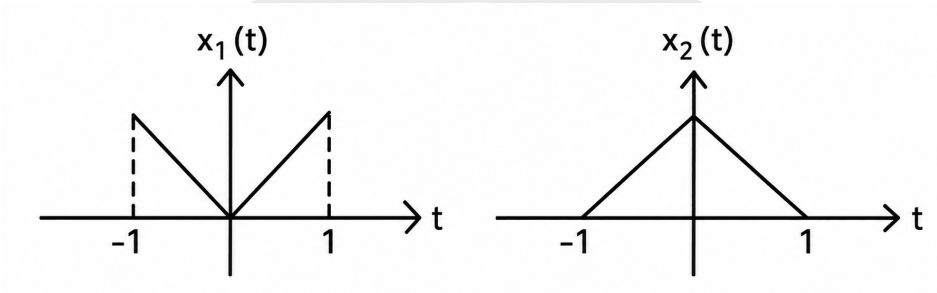


Fig. Solution Q1.18.1

Sampling with period

$$T = 0.25 \text{ s}$$

gives the samples

$$x_1[n] = \{1, 0.75, 0.5, 0.25, 0, 0.25, 0.5, 0.75, 1\}$$

$$x_2[n] = \{0, 0.25, 0.5, 0.75, 1, 0.75, 0.5, 0.25, 0\}$$

Energy of a discrete-time signal is

$$E = \sum |x[n]|^2.$$

Hence,

$$E_{x_1} = 1^2 + 0.75^2 + 0.5^2 + 0.25^2 + 0^2 + 0.25^2 + 0.5^2 + 0.75^2 + 1^2 = 3.75$$

$$E_{x_2} = 0^2 + 0.25^2 + 0.5^2 + 0.75^2 + 1^2 + 0.75^2 + 0.5^2 + 0.25^2 + 0^2 = 2.75.$$

Therefore,

$$E_{x_1} > E_{x_2}.$$

Observe that the largest-valued samples of $x_1[n]$ occur at both ends, whereas $x_2[n]$ has zeros at both ends. Since energy depends on the sum of squared samples, the two additional unit-valued samples make the energy of $x_1[n]$ greater than that of $x_2[n]$.

(a) The energy of $x_1[n]$ is greater than the energy of $x_2[n]$.

Key Points

- Energy of a discrete-time signal is $E = \sum_{n=-\infty}^{\infty} |x[n]|^2$.

Q1.18.2

MCQ

2018

2M

Ans: D

☒ ☐ ☐

Method 1

The given signal is

$$x(t) = [(t-1)u(t-1)] - [(t-2)u(t-2)] - [(t-3)u(t-3)] + [(t-4)u(t-4)].$$

Writing it in piecewise form,

$$x(t) = \begin{cases} 0, & t < 1, \\ t-1, & 1 \leq t < 2, \\ 1, & 2 \leq t < 3, \\ 4-t, & 3 \leq t < 4, \\ 0, & t \geq 4. \end{cases}$$

The signal energy is

$$E = \int_{-\infty}^{\infty} |x(t)|^2 dt.$$

Hence,

$$E = \int_1^2 (t-1)^2 dt + \int_2^3 1^2 dt + \int_3^4 (4-t)^2 dt.$$

Evaluating,

$$E = \frac{1}{3} + 1 + \frac{1}{3} = \frac{5}{3}.$$

Method 2

Based on equation given:

$$x(t) = r(t-1) - r(t-2) - r(t-3) + r(t-4)$$

The graph of $x(t)$ is

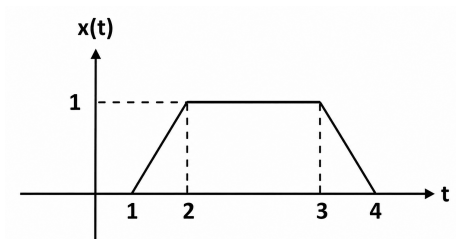


Fig. Solution Q1.18.2

$$E_x = \int_{-\infty}^{\infty} |x(t)|^2 dt = \int_1^4 (x(t))^2 dt$$

The area under the square of both triangles will be equal and it will be

$$\int_1^2 (t-1)^2 dt = \left[\frac{(t-1)^3}{3} \right]_1^2 = \frac{1}{3}$$

Hence,

$$E_x = 2 \times \frac{1}{3} + 1 \times 1 = \frac{5}{3} = 2.67$$

$$\boxed{(d) \frac{5}{3}}$$

Q1.17.1

NAT

2017

1M

Ans: 6

☒ ☐ ☐

From the waveform, one period is

$$T = 4.$$

Over one period,

$$f(t) = \begin{cases} 4, & \text{for 1 unit of time,} \\ -2, & \text{for 2 units of time,} \\ 0, & \text{for 1 unit of time.} \end{cases}$$

The mean square value is

$$\frac{1}{T} \int_0^T f^2(t) dt.$$

Hence,

$$\frac{1}{4} [(4)^2(1) + (-2)^2(2) + (0)^2(1)] = \frac{1}{4}(16 + 8) = \frac{24}{4} = 6.$$

$$\boxed{6}$$

Key Points

- Mean square value:

$$\overline{f^2} = \frac{1}{T} \int_0^T f^2(t) dt.$$

- Mean square is different from RMS. $\text{RMS} = \sqrt{\text{Mean Square}}.$

Q1.16.1

MCQ

2016

1M

Ans: A

☒ ☐ ☐

Using the scaling property of the Dirac delta function,

$$\delta(2t-2) = \frac{1}{2}\delta(t-1).$$

Hence,

$$\int_{-\infty}^{\infty} e^t \delta(2t-2) dt = \frac{1}{2} \int_{-\infty}^{\infty} e^t \delta(t-1) dt.$$

Using the sifting property,

$$\int_{-\infty}^{\infty} e^{-t} \delta(t-1) dt = e^{-1}.$$

Therefore,

$$\int_{-\infty}^{\infty} e^{-t} \delta(2t - 2) dt = \frac{1}{2e}.$$

$$(a) \frac{1}{2e}.$$

Key Points

- Scaling property:

$$\delta(at - b) = \frac{1}{|a|} \delta\left(t - \frac{b}{a}\right).$$

- Sifting property:

$$\int_{-\infty}^{\infty} x(t) \delta(t - t_0) dt = x(t_0).$$

Q1.16.2

MCQ

2016

1M

Ans: D

☒ ☐ ☐

Using the standard Dirichlet integral,

$$\int_{-\infty}^{\infty} \frac{\sin(at)}{\pi t} dt = \begin{cases} 1, & a > 0, \\ -1, & a < 0. \end{cases}$$

Here,

$$a = 2 > 0.$$

Therefore,

$$\int_{-\infty}^{\infty} \frac{\sin(2\pi t)}{\pi t} dt = 1.$$

Hence,

$$2 \int_{-\infty}^{\infty} \frac{\sin(2\pi t)}{\pi t} dt = 2 \times 1 = 2.$$

(d) 2

Q1.15.1

NAT

2015

1M

Ans: 90

☒ ☐ ☐

The moving average system is

$$y(t) = \frac{1}{T} \int_{t-T}^t u(\tau) d\tau.$$

This is an LTI system with impulse response

$$h(t) = \begin{cases} \frac{1}{T}, & 0 \leq t \leq T, \\ 0, & \text{otherwise.} \end{cases}$$

Its frequency response is

$$H(j\omega) = \frac{1}{T} \int_0^T e^{-j\omega t} dt = e^{-j\omega T/2} \frac{\sin(\omega T/2)}{\omega T/2}.$$

The input frequency is

$$f = \frac{1}{2T} \text{ Hz,}$$

so

$$\omega = 2\pi f = \frac{\pi}{T}.$$

Hence,

$$\angle H(j\omega) = -\frac{\omega T}{2} = -\frac{\pi}{2} = -90^\circ.$$

Since

$$\frac{\sin(\pi/2)}{\pi/2} > 0,$$

there is no additional phase shift.

Therefore, the output lags the input by

$$\boxed{90}$$

Q1.14.1

MCQ

2014

2M

Ans: A



The waveform consists of three parts:

$$x(t) = \begin{cases} 1, & 0 \leq t < T, \\ \frac{t-T}{T}, & T \leq t < 2T, \\ 1, & t \geq 2T. \end{cases}$$

The first part is represented by

$$u(t) - u(t - T).$$

The ramp between T and $2T$ is

$$\frac{t-T}{T}u(t-T) - \frac{t-2T}{T}u(t-2T),$$

which starts at 0 when $t = T$ and becomes 1 at $t = 2T$.

For $t \geq 2T$, the above ramp remains equal to 1, matching the waveform.

Hence,

$$x(t) = u(t) - u(t - T) + \frac{t-T}{T}u(t-T) - \frac{t-2T}{T}u(t-2T).$$

$$(a) \ u(t) - u(t - T) + \frac{(t-T)}{T}u(t-T) - \frac{(t-2T)}{T}u(t-2T)$$

Key Points

- Represent piecewise signals by adding delayed unit-step and ramp functions.
- A finite-duration ramp is obtained by subtracting two shifted ramps.

Q1.11.1

MCQ

2011

2M

Ans: A



Given that the random signal has zero mean,

$$\mu = 0.$$

The mean square value is

$$E[X^2] = \sigma^2.$$

For a uniform random variable distributed over the interval $[-a, a]$,

$$\sigma^2 = \frac{a^2}{3}.$$

The RMS value is

$$X_{\text{RMS}} = \sqrt{E[X^2]} = \sqrt{\sigma^2} = \sqrt{\frac{a^2}{3}} = \frac{a}{\sqrt{3}}.$$

$$(a) \frac{a}{\sqrt{3}}$$

Q1.10.1

MCQ

2010

1M

Ans: D



The given signal is

$$x(t) = 8 \sin\left(0.8\pi t + \frac{\pi}{4}\right).$$

Comparing with the standard form

$$x(t) = A \sin(\omega t + \phi),$$

the angular frequency is

$$\omega = 0.8\pi \text{ rad/s.}$$

The time period is

$$T = \frac{2\pi}{\omega} = \frac{2\pi}{0.8\pi} = \frac{2}{0.8} = 2.5 \text{ s.}$$

The amplitude and phase shift do not affect the period.

$$(d) 2.5 \text{ s}$$

Q1.08.1

MCQ

2008

2M

Ans: B



Let

$$y[n] = x[3 - 4n].$$

We examine the operations in the given options.

First perform downsampling by 4:

$$v_1[n] = x[4n].$$

Next, time reverse:

$$v_2[n] = v_1[-n] = x[-4n].$$

Finally, advance by 3 samples:

$$y[n] = v_2[n + 3] = x[-4(n + 3)] = x[-4n - 12],$$

which is not the required sequence.

Instead, if the final operation is a delay of 3 samples,

$$y[n] = v_2[n - 3] = x[-4(n - 3)] = x[12 - 4n],$$

which is also incorrect.

Start by advancing the input by 3 samples:

$$z_1[n] = x[n + 3].$$

Now pick every 4th sample:

$$z_2[n] = z_1[4n] = x[4n + 3].$$

Finally, time reverse:

$$y[n] = z_2[-n] = x[3 - 4n],$$

which exactly matches the given sequence.

Hence, the correct sequence of operations is:

(b) Advance $\rightarrow$ Downsample by 4 $\rightarrow$ Time Reverse

Q1.06.1
MCQ
2006
1M
Ans: A
☒ ☐ ☐

A signal is said to be *finite* if its value is finite for every time instant, i.e.,

$$|x(t)| < \infty, \quad \forall t.$$

A signal is *bounded* if there exists a finite constant M such that

$$|x(t)| \leq M, \quad \forall t.$$

Since a finite signal has finite values at every instant, there always exists a finite upper bound on its magnitude. Hence, every finite signal is bounded.

Now examine the remaining options:

- **B:** False. A bounded signal need not have finite energy. For example,

$$x(t) = 1$$

is bounded but has infinite energy.

- **C:** False. A bounded signal need not be time-limited.
- **D:** False. A bounded signal need not necessarily be finite-duration.

(a) A finite signal is always bounded.

Q1.05.1
MCQ
2005
2M
Ans: A
☒ ☐ ☐

For one time period, the waveform is

$$V(t) = \begin{cases} \frac{2t}{T}, & 0 \leq t \leq \frac{T}{2} \\ 0, & \frac{T}{2} < t \leq T \end{cases}$$

The RMS value is

$$V_{\text{RMS}} = \sqrt{\frac{1}{T} \int_0^T V^2(t) dt} = \sqrt{\frac{1}{T} \int_0^{T/2} \left(\frac{2t}{T}\right)^2 dt}.$$

Evaluating the integral,

$$V_{\text{RMS}} = \sqrt{\frac{4}{T^3} \left[\frac{t^3}{3} \right]_0^{T/2}} = \sqrt{\frac{4}{T^3} \cdot \frac{T^3}{24}} = \sqrt{\frac{1}{6}}.$$

(a) $\sqrt{\frac{1}{6}}$

Q1.04.1
MCQ
2004
2M
Ans: A
☒ ☐ ☐

Over one time period,

$$i(t) = \begin{cases} -\frac{12t}{T}, & 0 \leq t \leq \frac{T}{2}, \\ 6, & \frac{T}{2} < t \leq T. \end{cases}$$

The RMS value is

$$I_{\text{RMS}} = \sqrt{\frac{1}{T} \int_0^T i^2(t) dt}.$$

Substituting the waveform,

$$I_{\text{RMS}} = \sqrt{\frac{1}{T} \left[\int_0^{T/2} \left(\frac{12t}{T} \right)^2 dt + \int_{T/2}^T 6^2 dt \right]}.$$

$$I_{\text{RMS}} = \sqrt{\frac{1}{T} \left[\frac{144}{T^2} \cdot \frac{(T/2)^3}{3} + 36 \cdot \frac{T}{2} \right]} = \sqrt{6 + 18} = \sqrt{24} = 2\sqrt{6} \text{ A}.$$

Option A: $2\sqrt{6} \text{ A}$

Q1.04.2

MCQ

2004

1M

Ans: B



The resultant current is

$$i(t) = I_{\text{DC}} + i_{\text{AC}}(t),$$

where

$$I_{\text{DC}} = 10 \text{ A}, \quad I_{\text{AC(peak)}} = 20 \text{ A}.$$

The RMS value of the AC component is

$$I_{\text{AC(RMS)}} = \frac{20}{\sqrt{2}} = 10\sqrt{2} \text{ A}.$$

Since the average value of the AC component over one cycle is zero,

$$I_{\text{RMS}} = \sqrt{I_{\text{DC}}^2 + I_{\text{AC(RMS)}}^2}.$$

Substituting the values,

$$I_{\text{RMS}} = \sqrt{10^2 + (10\sqrt{2})^2} = \sqrt{100 + 200} = \sqrt{300} = 10\sqrt{3} \approx 17.3 \text{ A}.$$

(b) 17.3 A

Q1.02.1

MCQ

2002

2M

Ans: D



The waveform alternates between +100 V and -100 V with equal magnitude. Since RMS depends on the square of the voltage, the sign does not affect the result.

$$V_{\text{RMS}} = \sqrt{\frac{1}{T} \int_0^T v^2(t) dt}.$$

Here,

$$v^2(t) = 100^2 \quad \text{for the entire period.}$$

Hence,

$$V_{\text{RMS}} = \sqrt{\frac{1}{T} \int_0^T 100^2 dt} = \sqrt{10000} = 100 \text{ V}.$$

(d) 100 V

Q1.02.2

MCQ

2002

1M

Ans: D

☒ ☐ ☐

An arbitrary number of harmonics changes the shape of the waveform. Hence, the waveform parameters such as peak value, RMS value, and average value are generally different from those of the fundamental component alone. Therefore, the overall waveform differs from its fundamental component in all three measures.

(d) All the three measures (peak, RMS and average values)

Q1.02.3

MCQ

2002

1M

Ans: D

☒ ☐ ☐

For a capacitor,

$$i(t) = C \frac{dv_c(t)}{dt}.$$

Given

$$i(t) = 5\delta(t).$$

Hence,

$$\frac{dv_c(t)}{dt} = \frac{5}{C}\delta(t).$$

Integrating both sides,

$$v_c(t) = \frac{5}{C} \int \delta(t) dt = \frac{5}{C}u(t),$$

assuming zero initial voltage across the capacitor.

(d) $v_c(t) = \frac{5u(t)}{C}$

Q1.99.1

MCQ

1999

1M

Ans: A

☒ ☐ ☐

For a half-wave rectified symmetrical square wave,

$$i(t) = \begin{cases} 2 \text{ A}, & 0 \leq t < \frac{T}{2}, \\ 0, & \frac{T}{2} \leq t < T. \end{cases}$$

The RMS value is

$$I_{\text{RMS}} = \sqrt{\frac{1}{T} \int_0^T i^2(t) dt}.$$

Substituting the waveform,

$$I_{\text{RMS}} = \sqrt{\frac{1}{T} \left[\int_0^{T/2} (2)^2 dt \right]} = \sqrt{\frac{4(T/2)}{T}} = \sqrt{2} \text{ A}.$$

(a) $\sqrt{2} \text{ A}$

Q1.95.1
MCQ
1995
1M
Ans: B
☒ ☐ ☐

Over one time period,

$$s(t) = \begin{cases} \frac{2A}{T}t, & 0 \leq t \leq \frac{T}{2}, \\ -A, & \frac{T}{2} < t \leq T. \end{cases}$$

The RMS value is

$$S_{\text{RMS}} = \sqrt{\frac{1}{T} \int_0^T s^2(t) dt}.$$

Substituting the waveform,

$$S_{\text{RMS}} = \sqrt{\frac{1}{T} \left[\int_0^{T/2} \left(\frac{2At}{T} \right)^2 dt + \int_{T/2}^T A^2 dt \right]}.$$

Evaluating the integrals,

$$S_{\text{RMS}} = \sqrt{\frac{1}{T} \left[\frac{A^2 T}{6} + \frac{A^2 T}{2} \right]} = \sqrt{\frac{2A^2}{3}} = A\sqrt{\frac{2}{3}}.$$

$$(b) \sqrt{\frac{2}{3}} A$$

Q1.94.1
MCQ
1994
1M
Ans: B
☒ ☐ ☐

Using the sampling property of the Dirac delta function,

$$\int_{-\infty}^{\infty} f(t) \delta(t-a) dt = f(a),$$

provided a lies within the limits of integration.

Here,

$$f(t) = e^{-2t}, \quad a = 1.$$

Since $1 \in [-5, 6]$,

$$\int_{-5}^6 e^{-2t} \delta(t-1) dt = e^{-2(1)} = e^{-2}.$$

$$(b) e^{-2}$$

Q1.94.2
MCQ
1994
1M
Ans: B
☒ ☐ ☐

Match each waveform with its mathematical expression.

- | | |
|--|--------------------------------------|
| (A) : Ramp starting from the origin | $\Rightarrow f(t) = t u(t)$ (R) |
| (B) : Ramp delayed by 1 | $\Rightarrow f(t) = (t-1)u(t-1)$ (U) |
| (C) : Ramp with intercept 1 | $\Rightarrow f(t) = (t+1)u(t)$ (S) |
| (D) : Delayed ramp shifted upward by 1 | $\Rightarrow f(t) = t u(t-1)$ (P) |

$$(b) A-R, B-U, C-S, D-P$$

DEBUG INFO

Chapter I

Basics of Signals

Total Questions : 28

MCQ : 22

MSQ : 1

NAT : 5



PrepFusion

SOLUTIONS



Basics of Systems

Topics

1. Continuous-Time Convolution
2. Discrete-Time Convolution
3. Linear and Non-Linear Systems
4. Time Variant and Time-Invariant Systems
5. LTI Systems - Definition and Properties
6. Causal and Non-Causal Systems
7. Static and Dynamic Systems
8. Stable and Unstable Systems
9. Invertible and Non-Invertible Systems
10. Systems Involving Differential Equations

Q2.25.1

MCQ

2025

2M

Ans: B

☒ ☐ ☐

The impulse response of the given continuous-time LTI system is

$$h(t) = u(t)$$

since the output corresponding to the unit impulse input is the unit step signal.

For a continuous-time LTI system, BIBO stability requires

$$\int_{-\infty}^{\infty} |h(t)| dt < \infty.$$

Here,

$$\int_{-\infty}^{\infty} |u(t)| dt = \int_0^{\infty} 1 dt = \infty.$$

Hence, the system is **not BIBO stable**. Therefore, there exists at least one bounded input that produces an unbounded output.

Since the system is not BIBO stable, it violates the definition of bounded-input bounded-output stability. Thus, a bounded input can generate an unbounded output, making only option B correct.

(b) It is possible to find a bounded input signal which when applied to S results in an unbounded output signal.

Key Points

- A continuous-time LTI system is BIBO stable if and only if

$$\int_{-\infty}^{\infty} |h(t)| dt < \infty.$$

- If this condition is not satisfied, at least one bounded input will produce an unbounded output.

Mistakes to be avoided

- Remember that BIBO stability depends on the *absolute integrability* of the impulse response, not on its boundedness.

Q2.25.2

MCQ

2025

2M

Ans: A

☒ ☐ ☐

Using the convolution property,

$$\int_{-\infty}^{\infty} y(t) dt = \left(\int_{-\infty}^{\infty} x_1(t) dt \right) \left(\int_{-\infty}^{\infty} x_2(t) dt \right).$$

Now,

$$\int_{-\infty}^{\infty} x_1(t) dt = \int_0^1 1 dt + \int_1^2 (2-t) dt = 1 + \frac{1}{2} = \frac{3}{2}.$$

Similarly,

$$\int_{-\infty}^{\infty} x_2(t) dt = \int_0^1 t dt + \int_1^2 (2-t) dt = \frac{1}{2} + \frac{1}{2} = 1.$$

Hence,

$$\int_{-\infty}^{\infty} y(t) dt = \frac{3}{2} \times 1 = \frac{3}{2} = 1.5.$$

Instead of evaluating the convolution explicitly, use the area property of convolution:

$$\text{Area of } (x_1 * x_2) = (\text{Area of } x_1)(\text{Area of } x_2).$$

Computing the areas of the two given signals directly gives

$$\frac{3}{2} \times 1 = 1.5.$$

(a) 1.5

Q2.25.3

MCQ

2025

1M

Ans: B



A stable first-order LTI system has the unit step response

$$y(t) = K \left(1 - e^{-t/\tau} \right),$$

where K is the steady-state value and τ is the time constant.

From the table,

$$K = y(\infty) = 3.$$

At one time constant,

$$y(\tau) = 0.632 K = 0.632 \times 3 = 1.896.$$

From the given data,

$$y(1.6) = 1.65, \quad y(2.6) = 2.18.$$

Since 1.896 lies much closer to the output at $t = 2.6$ s, the time constant is approximately

$$\tau \approx 2 \text{ s}.$$

Using

$$3 \left(1 - e^{-t/\tau} \right) = 2.18,$$

we get

$$e^{-2.6/\tau} = 1 - \frac{2.18}{3} = 0.2733.$$

Hence,

$$\tau = \frac{2.6}{-\ln(0.2733)} \approx 1.99 \text{ s}.$$

Thus,

$$\tau \approx 2 \text{ s}.$$

(b) 2

Q2.25.4

MCQ

2025

1M

Ans: A



For a discrete-time LTI system, the output is given by the convolution of the input with the impulse response:

$$y[n] = x[n] * h[n],$$

where

$$h[n] = S\{\delta[n]\} = \begin{cases} 1, & n \in \{0, 1, 2\}, \\ 0, & \text{otherwise.} \end{cases}$$

Method 1

The impulse response can be written as

$$h[n] = \delta[n] + \delta[n - 1] + \delta[n - 2].$$

Hence,

$$\begin{aligned} y[n] &= x[n] * h[n] \\ &= x[n] * (\delta[n] + \delta[n - 1] + \delta[n - 2]) \\ &= x[n] + x[n - 1] + x[n - 2]. \end{aligned}$$

Therefore, the correct expression matches Option A.

Method 2

Using the convolution sum,

$$y[n] = \sum_{k=-\infty}^{\infty} x[k] h[n-k].$$

Since $h[n-k]$ is non-zero only for

$$n-k = 0, 1, 2,$$

we have

$$k = n, n-1, n-2.$$

Thus,

$$y[n] = x[n] + x[n-1] + x[n-2].$$

$$(a) x[n] + x[n-1] + x[n-2]$$

Q2.24.1

MCQ

2024

2M

Ans: D

● ○ ○

Method 1

Assume the input is bounded:

$$|x[n]| \leq M, \quad \forall n.$$

For system T_1 ,

$$(T_1 x)[n] = \sum_{k=0}^n x[k].$$

Hence,

$$|(T_1 x)[n]| \leq \sum_{k=0}^n |x[k]| \leq (n+1)M.$$

Since the bound grows with n , the output can become unbounded even for a bounded input. Therefore,

T_1 is not BIBO stable.

For system T_2 ,

$$(T_2 x)[n] = \sum_{k=0}^n \frac{1}{2^k} x[k].$$

Thus,

$$\begin{aligned} |(T_2 x)[n]| &\leq M \sum_{k=0}^n \frac{1}{2^k} \\ &\leq M \sum_{k=0}^{\infty} \frac{1}{2^k} \\ &= M \left(\frac{1}{1 - \frac{1}{2}} \right) = 2M. \end{aligned}$$

Since the output remains bounded for every bounded input,

T_2 is BIBO stable.

Method 2

Choose the bounded input

$$x[n] = 1, \quad \forall n.$$

Then,

$$(T_1 x)[n] = n + 1,$$

which is unbounded.

Also,

$$(T_2x)[n] = 1 + \frac{1}{2} + \cdots + \frac{1}{2^n} = 2 - \frac{1}{2^n},$$

which is bounded by 2.

Hence, T_1 is not BIBO stable, whereas T_2 is BIBO stable.

(d) T_1 is not BIBO stable but T_2 is BIBO stable.

Q2.24.2

MCQ

2024

2M

Ans: B



The given system is

$$y(t) = e^{-t} \int_{-\infty}^t e^{\tau} x(\tau) d\tau.$$

Method 1

Linearity:

Let

$$x(t) = a x_1(t) + b x_2(t).$$

Then,

$$\begin{aligned} y(t) &= e^{-t} \int_{-\infty}^t e^{\tau} (a x_1(\tau) + b x_2(\tau)) d\tau \\ &= a e^{-t} \int_{-\infty}^t e^{\tau} x_1(\tau) d\tau + b e^{-t} \int_{-\infty}^t e^{\tau} x_2(\tau) d\tau \\ &= a y_1(t) + b y_2(t). \end{aligned}$$

Hence, the system is **linear**.

Now check time invariance.

For the delayed input $x(t - t_0)$,

$$y'(t) = e^{-t} \int_{-\infty}^t e^{\tau} x(\tau - t_0) d\tau.$$

Let

$$\lambda = \tau - t_0.$$

Then,

$$\begin{aligned} y'(t) &= e^{-t} e^{t_0} \int_{-\infty}^{t-t_0} e^{\lambda} x(\lambda) d\lambda \\ &= e^{-(t-t_0)} \int_{-\infty}^{t-t_0} e^{\lambda} x(\lambda) d\lambda \\ &= y(t - t_0). \end{aligned}$$

Therefore, the system is **time-invariant**.

(b) The system is linear and time-invariant.

Key Points

- Integration is a linear operation.
- A change of variable is used to verify time invariance.
- The equivalent differential equation

$$\frac{dy(t)}{dt} + y(t) = x(t)$$

represents a causal first-order LTI system.

Q2.24.3

MCQ

2024

1M

Ans: A



Let

$$y(t) = x(-t).$$

The convolution of $x(t)$ and $y(t)$ is

$$z(t) = x(t) * y(t) = \int_{-\infty}^{\infty} x(\tau) y(t - \tau) d\tau.$$

Method 1

Substituting $y(t) = x(-t)$,

$$z(t) = \int_{-\infty}^{\infty} x(\tau) x(\tau - t) d\tau.$$

Now,

$$z(-t) = \int_{-\infty}^{\infty} x(\tau) x(\tau + t) d\tau.$$

Let

$$\lambda = \tau + t.$$

Then,

$$\begin{aligned} z(-t) &= \int_{-\infty}^{\infty} x(\lambda - t) x(\lambda) d\lambda \\ &= \int_{-\infty}^{\infty} x(\lambda) x(\lambda - t) d\lambda \\ &= z(t). \end{aligned}$$

Hence,

$$z(-t) = z(t),$$

so the convolution is an even signal.

Method 2

The convolution

$$x(t) * x(-t)$$

is the autocorrelation of $x(t)$. A fundamental property of the autocorrelation function is that it is always an even function.

(a) It is an even signal.

Q2.23.1

MSQ

2023

1M

Ans: B



Check each statement individually.

Option A: False.

Causality and stability are independent properties. A causal LTI system need not be BIBO stable.

Option B: True.

For a discrete-time LTI system,

$$\text{System is causal} \iff h[n] = 0, \quad n < 0,$$

where $h[n]$ is the response to the unit impulse input.

Option C: False

For stability,

$$\sum_{n=-\infty}^{\infty} |h[n]| < \infty.$$

Consider a signal

$$h[n] = \tan\left(\frac{n\pi}{4}\right), \quad 0 < n < 4.$$

which is of finite duration. Here, at $n = 2$,

$$\tan\left(\frac{\pi}{2}\right)$$

it is undefined (tends to ∞), which does not satisfy condition for BIBO stable system.

Option D: False.

The condition

$$0 < |h[n]| < 1, \quad \forall n$$

does *not* guarantee BIBO stability. For stability, the impulse response must satisfy

$$\sum_{n=-\infty}^{\infty} |h[n]| < \infty.$$

A counterexample is

$$h[n] = \begin{cases} \frac{1}{n+1}, & n \geq 0, \\ 0, & n < 0. \end{cases}$$

Clearly,

$$0 < |h[n]| < 1, \quad \forall n \geq 0,$$

but

$$\sum_{n=-\infty}^{\infty} |h[n]| = \sum_{n=0}^{\infty} \frac{1}{n+1} = \infty.$$

Since the impulse response is *not* absolutely summable, the system is **not** BIBO stable.

Hence, Option D is incorrect.

(b) A discrete-time LTI system is causal if and only if its response to a step input $u[n]$ is 0 for $n < 0$.

Key Points

- The statement says that the impulse response is of *finite duration*. This means that $h[n]$ is non-zero only over a finite number of samples *and is a valid finite-valued sequence*. Hence,

$$\sum_{n=-\infty}^{\infty} |h[n]| < \infty,$$

so the system is always BIBO stable.

But if we consider examples such as

$$h[n] = \tan\left(\frac{n\pi}{4}\right), \quad 0 < n < 4.$$

Here, at $n = 2$,

$$\tan\left(\frac{\pi}{2}\right)$$

is undefined (tends to ∞). Such a sequence is *not a valid finite-valued impulse response* of an LTI system. But GATE official answer key mentions only Option B to be true, so that means they have considered the word 'finite valued' to be explicit which was not mentioned in question statement

Hence, whenever GATE states that an impulse response has *finite duration*, it is implicitly assumed to be a well-defined finite-valued sequence. Therefore, Option C is always **true**.

Q2.23.2 NAT 2023 1M Ans: 4 ☒ ☐ ☐

The signals are

$$x(t) = \begin{cases} 1, & -1 \leq t \leq 1, \\ 0, & \text{otherwise,} \end{cases}$$

and

$$y(t) = \begin{cases} t - 3, & 1 \leq t \leq 5, \\ 0, & \text{otherwise.} \end{cases}$$

Since $x(t)$ is a unit rectangular pulse of width 2,

$$z(t) = x(t) * y(t) = \int_{-1}^1 y(t - \tau) d\tau = \int_{t-1}^{t+1} y(u) du.$$

Thus, $z(t)$ equals the area under $y(u)$ over a sliding window of width 2.

Evaluating,

$$z(t) = \begin{cases} \frac{t^2}{2} - 2t + \frac{3}{2}, & 0 \leq t \leq 2, \\ 2t - 6, & 2 \leq t \leq 4, \\ -\frac{t^2}{2} + 4t - 4, & 4 \leq t \leq 6. \end{cases}$$

For the last interval,

$$\frac{dz(t)}{dt} = 4 - t.$$

Hence,

$$\frac{dz(t)}{dt} = 0 \Rightarrow T_1 = 4 \text{ s.}$$

4

Q2.22.1 MCQ 2022 2M Ans: B ☒ ☐ ☐

The system is defined by

$$y(t) = x(e^t).$$

Linearity:

Let

$$x(t) = a x_1(t) + b x_2(t).$$

Then,

$$\begin{aligned} y(t) &= x(e^t) \\ &= a x_1(e^t) + b x_2(e^t) \\ &= a y_1(t) + b y_2(t). \end{aligned}$$

Hence, the system is **linear**.

Causality:

At time $t = t_0$,

$$y(t_0) = x(e^{t_0}).$$

Since

$$e^{t_0} > t_0, \quad \forall t_0,$$

the output depends on the value of the input at a future time. Therefore, the system is **non-causal**.

(b) Linear and non-causal.

Q2.22.2
MCQ
2022
2M
Ans: D


A causal LTI system is governed by

$$y(t) + \frac{1}{4} \frac{dy(t)}{dt} = 2x(t).$$

Taking the Laplace transform under zero initial conditions,

$$Y(s) + \frac{s}{4} Y(s) = 2X(s).$$

Hence, the transfer function is

$$H(s) = \frac{Y(s)}{X(s)} = \frac{2}{1 + \frac{s}{4}} = \frac{8}{s + 4}.$$

Taking the inverse Laplace transform,

$$h(t) = 8e^{-4t}u(t).$$

(d) $8e^{-4t}u(t)$

Q2.21.1
MCQ
2021
1M
Ans: C


The impulse response of cascaded discrete-time LTI systems is the convolution of their individual impulse responses:

$$h[n] = h_1[n] * h_2[n].$$

Given,

$$h_1[n] = \delta[n - 1] + \delta[n + 1],$$

and

$$h_2[n] = \delta[n] + \delta[n - 1].$$

Using the distributive property,

$$\begin{aligned} h[n] &= (\delta[n - 1] + \delta[n + 1]) * (\delta[n] + \delta[n - 1]) \\ &= \delta[n - 1] * \delta[n] + \delta[n - 1] * \delta[n - 1] \\ &\quad + \delta[n + 1] * \delta[n] + \delta[n + 1] * \delta[n - 1]. \end{aligned}$$

Using

$$\delta[n - a] * \delta[n - b] = \delta[n - (a + b)],$$

we obtain

$$\begin{aligned} \delta[n - 1] * \delta[n] &= \delta[n - 1], \\ \delta[n - 1] * \delta[n - 1] &= \delta[n - 2], \\ \delta[n + 1] * \delta[n] &= \delta[n + 1], \\ \delta[n + 1] * \delta[n - 1] &= \delta[n]. \end{aligned}$$

Hence,

$$h[n] = \delta[n - 2] + \delta[n - 1] + \delta[n] + \delta[n + 1].$$

(c) $\delta[n - 2] + \delta[n - 1] + \delta[n] + \delta[n + 1]$

Q2.21.2

MCQ

2021

1M

Ans: D



The system is defined by

$$y(t) = \max(0, x(t)).$$

Linearity:

Consider the input

$$x(t) = 1.$$

Then,

$$T\{x(t)\} = 1.$$

For the scaled input,

$$-x(t) = -1,$$

we get

$$T\{-x(t)\} = \max(0, -1) = 0.$$

However,

$$-T\{x(t)\} = -1 \neq 0.$$

Hence, the homogeneity property is violated. Therefore, the system is **non-linear**.

Time Invariance:

Let the input be delayed by t_0 :

$$x_1(t) = x(t - t_0).$$

The corresponding output is

$$y_1(t) = \max(0, x(t - t_0)).$$

Now delay the original output:

$$y(t - t_0) = \max(0, x(t - t_0)).$$

Since

$$y_1(t) = y(t - t_0),$$

the system is **time-invariant**.

(d) Non-linear and time-invariant.

Q2.20.1

MCQ

2020

2M

Ans: C



The given LTI system satisfies the difference equation

$$y[n] - ay[n - 1] = bx[n] - bx[n - 1].$$

Taking the z -transform under zero initial conditions,

$$Y(z) (1 - az^{-1}) = X(z) b (1 - z^{-1}).$$

Hence,

$$H(z) = \frac{Y(z)}{X(z)} = \frac{b(1 - z^{-1})}{1 - az^{-1}}.$$

For $a \neq 0$,

$$\frac{1}{1 - az^{-1}} = \sum_{k=0}^{\infty} a^k z^{-k}.$$

Therefore,

$$h[n] = b\delta[n] + b(a - 1)a^{n-1}u[n - 1].$$

Since the exponential term is non-zero for infinitely many values of n , the impulse response is infinite in duration. Hence, Option C is true.

Check the remaining options.

- **A:** False. Due to the recursive term $y[n - 1]$, the output depends on all past inputs through the recursion.
- **B:** False. A difference equation alone does not guarantee causality; different regions of convergence may correspond to causal or non-causal systems.
- **D:** False. Even if $x[n] = 0$ for $n < 0$, the output for $n > 0$ also depends on the initial condition $y[-1]$. Hence it is not solely determined by $x[n]$.

(c) The system impulse response is non-zero at infinitely many instants.

Q2.20.2

MCQ

2020

2M

Ans: C

☒ ☐ ☐

For the given LTI system,

$$y(t) = x(t) * h(t),$$

and

$$z(t) = |x(t)| * |h(t)|.$$

Using the definition of convolution,

$$y(t) = \int_{-\infty}^{\infty} x(\tau) h(t - \tau) d\tau.$$

Taking the magnitude,

$$|y(t)| = \left| \int_{-\infty}^{\infty} x(\tau) h(t - \tau) d\tau \right|.$$

Applying the triangle inequality,

$$|y(t)| \leq \int_{-\infty}^{\infty} |x(\tau)| |h(t - \tau)| d\tau = z(t).$$

Thus,

$$z(t) \geq |y(t)| \geq y(t),$$

for every t .

Hence,

$$z(t) \geq y(t), \quad \forall t.$$

(c) For all $t \in (-\infty, \infty)$, $z(t) \geq y(t)$.

Key Points

- Triangle inequality:

$$\left| \int f(\tau) d\tau \right| \leq \int |f(\tau)| d\tau.$$

- For any LTI system,

$$|x * h| \leq |x| * |h|.$$

Q2.20.3

MCQ

2020

1M

Ans: A

☒ ☐ ☐

The given LTI system is described by

$$\frac{d^2 y(t)}{dt^2} + 4y(t) = 6r(t).$$

Taking the Laplace transform under zero initial conditions,

$$s^2 Y(s) + 4Y(s) = 6R(s).$$

Hence, the transfer function is

$$H(s) = \frac{Y(s)}{R(s)} = \frac{6}{s^2 + 4}.$$

The poles are obtained by setting the denominator equal to zero:

$$s^2 + 4 = 0.$$

Therefore,

$$s = \pm 2j.$$

(a) $+2j, -2j$

Q2.19.1

MCQ

2019

1M

Ans: D

☒ ☐ ☐

For a causal LTI system, the impulse response must satisfy

$$h(t) = 0, \quad t < 0.$$

Examine each option.

• A:

$$h(t) = e^{-a(t-T)}u(t).$$

Since $u(t) = 0$ for $t < 0$, the impulse response is causal.

• B:

$$h(t) = e^{-a(t+T)}u(t) = e^{-aT}e^{-at}u(t).$$

Again, $u(t)$ ensures

$$h(t) = 0, \quad t < 0,$$

so it is causal.

• C:

$$h(t) = e^{at}u(t).$$

Although the response is unstable for $a > 0$, it is zero for $t < 0$. Hence, it is still a valid causal impulse response.

• D:

$$h(t) = 1 + e^{-at}u(t).$$

For $t < 0$,

$$h(t) = 1 \neq 0,$$

which violates the causality condition.

Hence, Option D cannot be the impulse response of a causal LTI system.

(d) $1 + e^{-at}u(t)$

Q2.18.1
MCQ
2018
1M
Ans: A
☒ ☐ ☐

An input $x(t)$ is called an eigenfunction of an LTI system if the output is a scaled version of the same input. Let

$$y(t) = T\{x(t)\}.$$

If $x(t)$ is an eigenfunction of the LTI system, then

$$y(t) = k x(t),$$

where k is a constant called the *eigenvalue*.

Hence, the output differs only by a constant scaling factor, while the input waveform remains unchanged.

(a) $k x(t)$, where k is an eigenvalue.

Q2.17.1
MCQ
2017
1M
Ans: D
☒ ☐ ☐

The given discrete-time system is

$$y[n] = (1 + (-1)^n) x[n].$$

Invertibility:

Since

$$1 + (-1)^n = \begin{cases} 2, & n \text{ even,} \\ 0, & n \text{ odd,} \end{cases}$$

the output becomes

$$y[n] = \begin{cases} 2x[n], & n \text{ even,} \\ 0, & n \text{ odd.} \end{cases}$$

Thus, all odd-indexed samples of $x[n]$ are lost in the output and cannot be recovered. Hence, the system is **non-invertible**.

Time Invariance:

Let the input be delayed by n_0 :

$$x_1[n] = x[n - n_0].$$

The corresponding output is

$$y_1[n] = (1 + (-1)^n) x[n - n_0].$$

Now delay the original output:

$$y[n - n_0] = (1 + (-1)^{n-n_0}) x[n - n_0].$$

Since, in general,

$$(-1)^n \neq (-1)^{n-n_0},$$

we have

$$y_1[n] \neq y[n - n_0].$$

Therefore, the system is **time-varying**.

(d) Non-invertible and time-varying.

Q2.17.2
NAT
2017
2M
Ans: 0.098


The poles of the causal and stable system are

$$p_k = \frac{1}{\sqrt{2}} \exp\left(j \frac{(2k-1)\pi}{4}\right), \quad k = 1, 2, 3, 4,$$

and all the zeros are at $z = 0$.

Since all four zeros are at the origin,

$$H(z) = K \frac{z^4}{\prod_{k=1}^4 (z - p_k)}.$$

The poles are

$$\frac{1+j}{2}, \frac{-1+j}{2}, \frac{-1-j}{2}, \frac{1-j}{2}.$$

Hence,

$$\prod_{k=1}^4 (z - p_k) = \left(z^2 - z + \frac{1}{2}\right) \left(z^2 + z + \frac{1}{2}\right) = z^4 + \frac{1}{4}.$$

Therefore,

$$H(z) = K \frac{z^4}{z^4 + \frac{1}{4}} = \frac{K}{1 + \frac{1}{4}z^{-4}}.$$

Using

$$H(1) = \frac{5}{4},$$

we get

$$\frac{K}{1 + \frac{1}{4}} = \frac{5}{4} \Rightarrow K = \frac{25}{16}.$$

Thus,

$$H(z) = \frac{\frac{25}{16}}{1 + \frac{1}{4}z^{-4}} = \frac{25}{16} \sum_{m=0}^{\infty} \left(-\frac{1}{4}\right)^m z^{-4m}.$$

Hence,

$$h[n] = \frac{25}{16} \sum_{m=0}^{\infty} \left(-\frac{1}{4}\right)^m \delta[n - 4m].$$

Since

$$g[n] = j^n h[n],$$

at $n = 8$,

$$h[8] = \frac{25}{16} \left(-\frac{1}{4}\right)^2 = \frac{25}{256},$$

and

$$j^8 = 1.$$

Therefore,

$$g[8] = \frac{25}{256} = 0.09765625.$$

0.098

Q2.17.3

MCQ

2017

2M

Ans: B



For an LTI system with zero initial conditions,

$$\frac{d^2y(t)}{dt^2} + 7\frac{dy(t)}{dt} + 10y(t) = 4x(t) + 5\frac{dx(t)}{dt}$$

Taking Laplace transform,

$$(s^2 + 7s + 10)Y(s) = (4 + 5s)X(s)$$

Hence, the transfer function is

$$H(s) = \frac{Y(s)}{X(s)} = \frac{5s + 4}{(s + 2)(s + 5)}.$$

Using partial fraction expansion,

$$\frac{5s + 4}{(s + 2)(s + 5)} = \frac{A}{s + 2} + \frac{B}{s + 5}$$

$$5s + 4 = A(s + 5) + B(s + 2).$$

Putting $s = -2$,

$$-6 = 3A \Rightarrow A = -2.$$

Putting $s = -5$,

$$-21 = -3B \Rightarrow B = 7.$$

Therefore,

$$H(s) = \frac{-2}{s + 2} + \frac{7}{s + 5}.$$

Taking inverse Laplace transform,

$$h(t) = (-2e^{-2t} + 7e^{-5t})u(t).$$

$$(b) -2e^{-2t}u(t) + 7e^{-5t}u(t)$$

Q2.17.4

MCQ

2017

2M

Ans: D



Since the overall impulse response of a cascade system is the convolution of the individual impulse responses,

$$h(n) = h_1(n) * h_2(n)$$

where

$$h_1(n) = \{1, -1\}, \quad h_2(n) = \{1, 1\}.$$

Convolving the two sequences,

$$h(n) = \{1, -1\} * \{1, 1\} = \{1, 0, -1\}.$$

Hence,

$$y(n) = x(n) * h(n) = x(n) * \{1, 0, -1\}.$$

This is equivalent to

$$y(n) = x(n) - x(n - 2).$$

Now test the options.

For Option D,

$$x(n) = \{1, 2, 2, 1\},$$

$$y(n) = \{1, 2, 1, -1, -2, -1\},$$

which exactly matches the given output sequence.

$$(d) x(n) = \{1, 2, 2, 1\}$$

Q2.16.1

MCQ

2016

1M

Ans: C



The given system is

$$y(t) = x(t) \cos(t).$$

Linearity:

Let the input be

$$x(t) = a x_1(t) + b x_2(t).$$

Then,

$$\begin{aligned} y(t) &= [a x_1(t) + b x_2(t)] \cos(t) \\ &= a x_1(t) \cos(t) + b x_2(t) \cos(t) \\ &= a y_1(t) + b y_2(t). \end{aligned}$$

Hence, the system satisfies the superposition principle and is **linear**.

Time Invariance:

For input $x(t - t_0)$,

$$y_1(t) = x(t - t_0) \cos(t).$$

Delaying the original output by t_0 ,

$$y(t - t_0) = x(t - t_0) \cos(t - t_0).$$

Since

$$x(t - t_0) \cos(t) \neq x(t - t_0) \cos(t - t_0),$$

the delayed input does not produce a delayed output.

Therefore, the system is **time-varying**.

(c) Linear and time-varying

Key Points

- Multiplication by a known function of time preserves linearity.
- If the system equation explicitly contains t , it is generally time-varying.

Mistakes to be avoided

- Do not confuse multiplication by $\cos(t)$ with a nonlinear operation.
- Presence of an explicit time-dependent coefficient indicates a time-varying system.

Q2.15.1 MCQ 2015 2M Ans: D ☒ ☐ ☐

For a continuous-time LTI system, the necessary and sufficient condition for BIBO stability is

$$\int_{-\infty}^{\infty} |h(t)| dt < \infty,$$

i.e., the impulse response must be **absolutely integrable**.

Since the input $u(t)$ is bounded ($|u(t)| \leq 1$), the corresponding output is the step response

$$s(t) = h(t) * u(t).$$

For a BIBO stable system,

$$|s(t)| = \left| \int_{-\infty}^t h(\tau) d\tau \right| \leq \int_{-\infty}^{\infty} |h(\tau)| d\tau < \infty.$$

Hence, the unit step response is always **bounded**.

Checking the options:

- A. False: BIBO stability requires *absolute* integrability of $h(t)$.
 B. False: The impulse response need not have finite support.
 C. False: The step response is not necessarily absolutely integrable.
 D. True: The unit step response is bounded.

(d) The unit step response will be bounded.

Q2.15.2 MCQ 2015 2M Ans: D ☒ ☐ ☐

The given impulse response is

$$g(t) = \begin{cases} 1, & 0 \leq t \leq 1, \\ 0, & \text{otherwise.} \end{cases}$$

For two cascaded LTI systems, the overall impulse response is the convolution

$$h(t) = g(t) * g(t).$$

Evaluating the convolution,

$$h(t) = \begin{cases} t, & 0 \leq t \leq 1, \\ 2 - t, & 1 \leq t \leq 2, \\ 0, & \text{otherwise.} \end{cases}$$

This is a triangular waveform. Its maximum value occurs at

$$t = 1,$$

giving

$$h_{\max} = 1.$$

(d) 1

Q2.14.1

MCQ

2014

1M

Ans: C

☒ ☐ ☐

Let

$$x(t) \neq 0 \quad \text{only for} \quad T_x < t < T'_x,$$

and

$$y(t) \neq 0 \quad \text{only for} \quad T_y < t < T'_y.$$

The convolution is

$$z(t) = x(t) * y(t).$$

The support of the convolution is obtained by adding the support intervals of the two signals.

Hence,

$$T_x + T_y < t < T'_x + T'_y.$$

Therefore,

$$z(t) = 0$$

outside this interval.

Thus, only Option C is correct.

(c) $z(t)$ is zero outside $T_x + T_y < t < T'_x + T'_y$.

Q2.13.1

MCQ

2013

2M

Ans: B

☒ ☐ ☐

The step response of an LTI system is the response to the unit step input:

$$s(t) = h(t) * u(t).$$

Given,

$$h(t) = \delta(t - 1) + \delta(t - 3).$$

Using the property

$$\delta(t - a) * u(t) = u(t - a),$$

the step response is

$$s(t) = u(t - 1) + u(t - 3).$$

At $t = 2$,

$$s(2) = u(1) + u(-1) = 1 + 0 = 1.$$

(b) 1

Q2.13.2

MCQ

2013

1M

Ans: C



For two LTI systems connected in cascade, the overall impulse response is obtained by convolving the individual impulse responses.

Let the impulse responses be $h_1(t)$ and $h_2(t)$.

The overall impulse response is

$$h(t) = h_1(t) * h_2(t) = \int_{-\infty}^{\infty} h_1(\tau) h_2(t - \tau) d\tau.$$

Hence, the cascade connection is represented by the convolution of the two impulse responses.

(c) Convolution of $h_1(t)$ and $h_2(t)$

Q2.12.1

MCQ

2012

2M

Ans: D



The input-output relationship is

$$y(t) = \int_{-\infty}^t x(\tau) \cos(3\tau) d\tau.$$

Time Invariance:

For a delayed input $x(t - t_0)$,

$$y_1(t) = \int_{-\infty}^t x(\tau - t_0) \cos(3\tau) d\tau.$$

Let $u = \tau - t_0$. Then,

$$y_1(t) = \int_{-\infty}^{t-t_0} x(u) \cos(3u + 3t_0) du.$$

Since

$$\cos(3u + 3t_0) \neq \cos(3u),$$

we have

$$y_1(t) \neq y(t - t_0).$$

Hence, the system is **not time-invariant**.

Stability:

Consider the bounded input

$$x(t) = \cos(3t) u(t),$$

where $u(t)$ is the unit step function. Since

$$|x(t)| = |\cos(3t)u(t)| \leq 1,$$

the input is bounded.

The output is

$$y(t) = \int_{-\infty}^t x(\tau) \cos(3\tau) d\tau.$$

Substituting $x(\tau) = \cos(3\tau)u(\tau)$,

$$y(t) = \begin{cases} 0, & t < 0, \\ \int_0^t \cos^2(3\tau) d\tau, & t \geq 0. \end{cases}$$

Using the identity

$$\cos^2 \theta = \frac{1 + \cos(2\theta)}{2},$$

we obtain

$$\begin{aligned} y(t) &= \int_0^t \frac{1 + \cos(6\tau)}{2} d\tau \\ &= \frac{1}{2} \int_0^t d\tau + \frac{1}{2} \int_0^t \cos(6\tau) d\tau \\ &= \frac{t}{2} + \frac{\sin(6t)}{12}, \quad t \geq 0. \end{aligned}$$

Hence,

$$y(t) = \begin{cases} 0, & t < 0, \\ \frac{t}{2} + \frac{\sin(6t)}{12}, & t \geq 0. \end{cases}$$

Since the output contains the ramp term

$$\frac{t}{2},$$

it grows unbounded as $t \rightarrow \infty$, i.e.,

$$|y(t)| \rightarrow \infty.$$

Thus, a bounded input produces an unbounded output. Therefore, the system is **not BIBO stable**.

(d) Not time-invariant and not stable

Q2.12.2

MCQ

2012

2M

Ans: A

☒ ☐ ☐

Method 1

The output is the convolution of $h[n]$ and $g[n]$:

$$y[n] = h[n] * g[n] = \sum_{k=-\infty}^{\infty} h[k] g[n-k].$$

Given,

$$h[n] = \left(\frac{1}{2}\right)^n u[n],$$

and $g[n]$ is causal, i.e.,

$$g[n] = 0, \quad n < 0.$$

For $n = 0$,

$$y[0] = h[0]g[0] = 1 \cdot g[0].$$

Since $y[0] = 1$,

$$g[0] = 1.$$

Now for $n = 1$,

$$\begin{aligned} y[1] &= h[0]g[1] + h[1]g[0] \\ &= g[1] + \frac{1}{2}(1). \end{aligned}$$

Given,

$$y[1] = \frac{1}{2},$$

therefore,

$$g[1] + \frac{1}{2} = \frac{1}{2}$$

$$\Rightarrow g[1] = 0.$$

Method 2

The convolution is

$$y[n] = \sum_{k=-\infty}^{\infty} h[k] g[n-k].$$

Since

$$h[n] = \left(\frac{1}{2}\right)^n u[n],$$

its initial samples are

$$h[0] = 1, \quad h[1] = \frac{1}{2}, \quad h[2] = \frac{1}{4}, \dots$$

Also, $g[n]$ is causal, so

$$g[n] = 0, \quad n < 0.$$

Using the convolution matrix,

$$\begin{bmatrix} y[0] \\ y[1] \end{bmatrix} = \begin{bmatrix} h[0] & 0 \\ h[1] & h[0] \end{bmatrix} \begin{bmatrix} g[0] \\ g[1] \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ \frac{1}{2} & 1 \end{bmatrix} \begin{bmatrix} g[0] \\ g[1] \end{bmatrix}.$$

Since

$$y[0] = 1, \quad y[1] = \frac{1}{2},$$

we obtain

$$\begin{bmatrix} 1 \\ \frac{1}{2} \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ \frac{1}{2} & 1 \end{bmatrix} \begin{bmatrix} g[0] \\ g[1] \end{bmatrix}.$$

From the first equation,

$$g[0] = 1.$$

Substituting into the second equation,

$$\frac{1}{2} = \frac{1}{2}(1) + g[1].$$

Hence,

$$g[1] = 0.$$

(a) 0

Q2.11.1

MCQ

2011

2M

Ans: C

☒ ☐ ☐

The step response of an LTI system is obtained by convolving the impulse response with the unit step function:

$$s(t) = h(t) * u(t).$$

Given,

$$h(t) = (e^{-t} + e^{-2t}) u(t).$$

The step response is

$$s(t) = \int_0^t (e^{-\tau} + e^{-2\tau}) d\tau.$$

Evaluating the integral,

$$\begin{aligned} s(t) &= (1 - e^{-t}) + \frac{1}{2} (1 - e^{-2t}) \\ &= \frac{3}{2} - e^{-t} - \frac{1}{2} e^{-2t}. \end{aligned}$$

Hence,

$$s(t) = \left(\frac{3}{2} - e^{-t} - \frac{1}{2} e^{-2t} \right) u(t).$$

$$(c) \left(1.5 - e^{-t} - 0.5e^{-2t} \right) u(t)$$

Q2.10.1

MCQ

2010

2M

Ans: C

☒ ☐ ☐

Given,

$$x[n] = \{1, -1\},$$

and

$$y[n] = \{1, 0, 0, 0, -1\}.$$

Since

$$y[n] = x[n] * h[n],$$

we determine the impulse response $h[n]$.

Using the convolution with

$$x[n] = \delta[n] - \delta[n - 1],$$

we get

$$y[n] = h[n] - h[n - 1].$$

Now compute the samples sequentially:

$$y[0] = h[0] = 1$$

$$y[1] = h[1] - h[0] = 0 \Rightarrow h[1] = 1$$

$$y[2] = h[2] - h[1] = 0 \Rightarrow h[2] = 1$$

$$y[3] = h[3] - h[2] = 0 \Rightarrow h[3] = 1.$$

Finally,

$$y[4] = -h[3] = -1,$$

which is satisfied.

Hence,

$$h[n] = \{1, 1, 1, 1\}.$$

$$(c) h[n] = \{1, 1, 1, 1\}$$

Q2.10.2

MCQ

2010

1M

Ans: B



The system is described by

$$y(t) = \int_{-\infty}^{5t} x(\tau) d\tau, \quad t > 0.$$

Linearity:

Let

$$x(t) = a x_1(t) + b x_2(t).$$

Then,

$$\begin{aligned} y(t) &= \int_{-\infty}^{5t} [a x_1(\tau) + b x_2(\tau)] d\tau \\ &= a \int_{-\infty}^{5t} x_1(\tau) d\tau + b \int_{-\infty}^{5t} x_2(\tau) d\tau \\ &= a y_1(t) + b y_2(t). \end{aligned}$$

Hence, the system is **linear**.

Causality:

The output at time t depends on

$$x(\tau), \quad -\infty < \tau \leq 5t.$$

Since $5t > t$ for $t > 0$, the output depends on future values of the input ($t < \tau \leq 5t$).

Therefore, the system is **non-causal**.

$$(b) \text{ Linear but not causal}$$

Q2.09.1

MCQ

2009

2M

Ans: B



A cascade of three LTI systems is given to be **causal** and **unstable**.

Causality:

A cascade is causal only if each individual system is causal. If even one system is non-causal, the overall cascade becomes non-causal.

Hence, all three systems must be causal.

Stability:

For a cascade of LTI systems to be BIBO stable, every individual system must be stable. Since the overall cascade is unstable, at least one of the systems must be unstable.

Therefore,

At least one system is unstable and at least one system is causal.

Checking the options:

- A. False: Every system need not be unstable.
- B. True: At least one system is unstable, and since all systems are causal, at least one system is certainly causal.
- C. False: It is not necessary that all systems are unstable.
- D. False: No conclusion can be made about the majority being unstable.

(b) At least one system is unstable and at least one system is causal

Q2.09.2

MCQ

2009

1M

Ans: D



For the original LTI system,

$$y(t) = x(t) * h(t).$$

Now the modified input and impulse response are

$$x_1(t) = x(t - \tau), \quad h_1(t) = h(t - \tau).$$

The new output is

$$\begin{aligned} y_1(t) &= x_1(t) * h_1(t) \\ &= \int_{-\infty}^{\infty} x(\lambda - \tau) h(t - \tau - \lambda) d\lambda. \end{aligned}$$

Let

$$u = \lambda - \tau \Rightarrow d\lambda = du.$$

Then,

$$\begin{aligned} y_1(t) &= \int_{-\infty}^{\infty} x(u) h(t - 2\tau - u) du \\ &= y(t - 2\tau). \end{aligned}$$

Thus, delaying both the input and the impulse response by τ delays the output by 2τ .

(d) $y(t - 2\tau)$
Q2.08.1

MCQ

2008

2M

Ans: D



The system is defined by

$$y(t) = \int_{-\infty}^{-2t} x(\tau) d\tau.$$

We examine its causality, time invariance and stability.

Causality:

The output at time t depends on the input over

$$-\infty < \tau \leq -2t.$$

For $t < 0$,

$$-2t > t,$$

so the output depends on future values of the input. Hence, the system is **non-causal**.

Time Invariance:

For the delayed input $x(t - t_0)$,

$$y_1(t) = \int_{-\infty}^{-2t} x(\tau - t_0) d\tau.$$

Let $u = \tau - t_0$. Then,

$$y_1(t) = \int_{-\infty}^{-2t-t_0} x(u) du.$$

However,

$$y(t - t_0) = \int_{-\infty}^{-2(t-t_0)} x(u) du = \int_{-\infty}^{-2t+2t_0} x(u) du.$$

Since

$$-2t - t_0 \neq -2t + 2t_0,$$

we have

$$y_1(t) \neq y(t - t_0).$$

Therefore, the system is **time-varying**.

Stability:

For a bounded input $|x(t)| \leq M$,

$$|y(t)| \leq M \int_{-\infty}^{-2t} d\tau = \infty.$$

Thus, a bounded input can produce an unbounded output, so the system is **unstable**.

(d) Non-causal, time-varying and unstable

Q2.08.2

MCQ

2008

1M

Ans: D

● ○ ○

A causal linear time-varying (LTV) system has impulse response $h(t)$.

We examine the given statements.

Statement (I):

The principle of superposition is the defining property of a linear system. Since the system is stated to be *linear*, superposition holds.

Hence, Statement (I) is **correct**.

Statement (II):

For a causal system, the response cannot occur before the impulse is applied. Therefore, the impulse response must satisfy

$$h(t) = 0, \quad t < 0.$$

Hence, Statement (II) is also **correct**.

(d) Both Statement (I) and Statement (II) are correct

Q2.08.3

MCQ

2008

1M

Ans: A



The input signal is

$$x(t) = e^{-\alpha t} \sin(\omega t).$$

Express the input as the imaginary part of a complex exponential:

$$x(t) = \Im \{ e^{(-\alpha + j\omega)t} \}.$$

For an LTI system, the complex exponential

$$e^{st}$$

is an eigenfunction. Hence,

$$e^{st} \longrightarrow H(s)e^{st},$$

where $H(s)$ is the system transfer function evaluated at $s = -\alpha + j\omega$.

Therefore,

$$y(t) = |H(s)| e^{-\alpha t} \sin(\omega t + \angle H(s)).$$

Comparing with

$$K e^{-\beta t} \sin(\nu t + \phi),$$

we obtain

$$\beta = \alpha, \quad \nu = \omega.$$

$$(c) \beta = \alpha \text{ and } \nu = \omega$$

Q2.07.1

MCQ

2007

1M

Ans: D



A stable LTI system is excited by the sinusoidal input

$$x(t) = a_1 \sin(\omega_1 t + \phi_1).$$

For a stable LTI system, a sinusoidal input produces a sinusoidal steady-state output of the *same frequency*. Only the amplitude and phase are modified by the system.

Hence,

$$y_{ss}(t) = a_2 \sin(\omega_1 t + \phi_2),$$

or equivalently,

$$y_{ss}(t) = a_2 \cos(\omega_1 t + \phi),$$

since sine and cosine differ only by a phase shift.

Therefore,

$$\omega_2 = \omega_1,$$

and $F(\cdot)$ must be either a sine or a cosine function.

Checking the options:

A. False: F cannot be an arbitrary periodic function.

B. False: The amplitude generally changes, so $a_1 \neq a_2$ in general.

C. False: The phase need not remain unchanged.

D. True: F must be a sine or cosine function with $\omega_1 = \omega_2$.

(d) F must be a “sine” or “cosine” function with $\omega_1 = \omega_2$.

Q2.06.1

MCQ

2006

2M

Ans: A


Method 1

Given,

$$x[-1] = -1, \quad x[0] = 2,$$

and all other samples of $x[n]$ are zero.

Also,

$$y[-1] = -1, \quad y[0] = 3, \quad y[1] = -1, \quad y[2] = -2,$$

with $y[n] = 0$ for $n < -1$ and $n > 2$.

Using the convolution relation,

$$y[n] = x[n] * h[n] = \sum_k x[k]h[n-k].$$

Since only $x[-1]$ and $x[0]$ are non-zero,

$$y[n] = -h[n+1] + 2h[n].$$

Now compute the impulse response recursively.

From $n = 2$,

$$2h[2] - h[3] = -2.$$

As $y[n] = 0$ for $n > 2$, we get $h[3] = 0$, hence

$$h[2] = -1.$$

Next,

$$2h[1] - h[2] = -1 \Rightarrow 2h[1] + 1 = -1 \Rightarrow h[1] = -1.$$

Similarly,

$$2h[0] - h[1] = 3 \Rightarrow 2h[0] + 1 = 3 \Rightarrow h[0] = 1.$$

Finally,

$$2h[-1] - h[0] = -1 \Rightarrow 2h[-1] - 1 = -1 \Rightarrow h[-1] = 0.$$

Also, using $y[n] = 0$ outside the given range gives

$$h[n] = 0, \quad n < 0, \quad n > 2.$$

Hence,

$$h[0] = 1, \quad h[1] = h[2] = -1.$$

Method 2

Given

$$x[-1] = -1, \quad x[0] = 2,$$

and all other samples of $x[n]$ are zero.

The convolution is

$$y[n] = x[n] * h[n].$$

Since only $x[-1]$ and $x[0]$ are non-zero,

$$y[n] = -h[n+1] + 2h[n].$$

Using the given output samples,

$$y[-1] = -1, \quad y[0] = 3, \quad y[1] = -1, \quad y[2] = -2.$$

These equations can be written in matrix form as

$$\begin{bmatrix} y[-1] \\ y[0] \\ y[1] \\ y[2] \end{bmatrix} = \begin{bmatrix} 2 & -1 & 0 & 0 \\ 0 & 2 & -1 & 0 \\ 0 & 0 & 2 & -1 \\ 0 & 0 & 0 & 2 \end{bmatrix} \begin{bmatrix} h[-1] \\ h[0] \\ h[1] \\ h[2] \end{bmatrix}.$$

Substituting the given output values,

$$\begin{bmatrix} -1 \\ 3 \\ -1 \\ -2 \end{bmatrix} = \begin{bmatrix} 2 & -1 & 0 & 0 \\ 0 & 2 & -1 & 0 \\ 0 & 0 & 2 & -1 \\ 0 & 0 & 0 & 2 \end{bmatrix} \begin{bmatrix} h[-1] \\ h[0] \\ h[1] \\ h[2] \end{bmatrix}.$$

Since the coefficient matrix is upper triangular, solve from the last equation upward:

$$\begin{aligned} 2h[2] &= -2 \Rightarrow h[2] = -1, \\ 2h[1] - h[2] &= -1 \Rightarrow 2h[1] + 1 = -1 \Rightarrow h[1] = -1, \end{aligned}$$

$$2h[0] - h[1] = 3 \Rightarrow 2h[0] + 1 = 3 \Rightarrow h[0] = 1,$$

$$2h[-1] - h[0] = -1 \Rightarrow 2h[-1] - 1 = -1 \Rightarrow h[-1] = 0.$$

Also, since

$$y[n] = 0, \quad n < -1 \text{ and } n > 2,$$

it follows that

$$h[n] = 0, \quad n < 0, n > 2.$$

$$(a) \ h[n] = 0 \text{ for } n < 0, n > 2, \ h[0] = 1, \ h[1] = h[2] = -1$$

Q2.06.2

MCQ

2006

2M

Ans: D



The system is defined as

$$y(t) = e^{-|x(t)|}.$$

We determine the condition under which the output remains bounded.

Since

$$|x(t)| \geq 0,$$

we have

$$0 < e^{-|x(t)|} \leq 1$$

for every finite or infinite value of $x(t)$.

Thus,

$$0 < y(t) \leq 1,$$

which shows that the output is always bounded irrespective of whether $x(t)$ is bounded or unbounded.

Hence, $y(t)$ remains bounded even when $x(t)$ is unbounded.

Checking the options:

- A. False: Bounded input is not necessary.
- B. False: $x(t)$ need not be non-negative because $|x(t)|$ is used.
- C. False: The output is bounded for all t , not only for $t \geq 0$.
- D. True: The output is bounded even when $x(t)$ is not bounded.

(d) $y(t)$ is bounded even when $x(t)$ is not bounded.

Q2.02.1

MCQ

2002

1M

Ans: B



Let $s(t)$ denote the step response of a linear system with zero initial conditions.

Then,

$$s(t) = h(t) * u(t),$$

where $h(t)$ is the impulse response.

The response of the system to the input $u(t)$ is

$$y(t) = h(t) * u(t).$$

Since

$$s(t) = h(t) * u(t),$$

we have

$$y(t) = s(t).$$

Now,

$$\frac{d}{dt}s(t) = \frac{d}{dt} \left[\int_0^t s(t-\tau)u(\tau) d\tau \right],$$

because convolution with the unit impulse is obtained by differentiating the convolution with the unit step:

$$\frac{d}{dt}(s * u) = s * \delta = s.$$

Hence, the required response is represented by

$$\frac{d}{dt} \left[\int_0^t s(t - \tau) u(\tau) d\tau \right].$$

$$(b) \frac{d}{dt} \left[\int_0^t s(t - \tau) u(\tau) d\tau \right]$$

Q2.93.1

MCQ

1993

1M

Ans: A

● ○ ○

Let $h(t)$ be the impulse response and $s(t)$ be the step response of the system. Since

$$s(t) = h(t) * u(t),$$

the impulse response is

$$h(t) = \frac{ds(t)}{dt}.$$

For any input $u(t)$, the output is

$$y(t) = h(t) * u(t).$$

Substituting $h(t) = \frac{ds(t)}{dt}$,

$$y(t) = \frac{ds(t)}{dt} * u(t).$$

Using the differentiation property of convolution,

$$\frac{ds(t)}{dt} * u(t) = \frac{d}{dt} [s(t) * u(t)].$$

Since

$$s(t) * u(t) = \int_0^t s(t - \tau) u(\tau) d\tau,$$

we obtain

$$y(t) = \frac{d}{dt} \left[\int_0^t s(t - \tau) u(\tau) d\tau \right].$$

$$(a) \frac{d}{dt} \left[\int_0^t s(t - \tau) u(\tau) d\tau \right]$$

Q2.92.1

NAT

1992

5M

Ans: 2.8

● ○ ○

Given,

Method 1

$$h(t) = \begin{cases} 1, & 0 \leq t < 1, \\ 0, & \text{otherwise.} \end{cases}$$

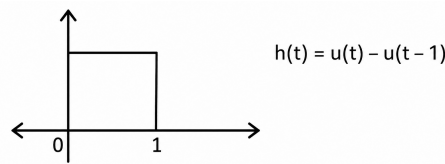


Fig. Solution Q2.92.1

For two identical networks connected in cascade, the overall impulse response is

$$h_{eq}(t) = h(t) * h(t).$$

$$h_{eq}(t) = \int_{-\infty}^{\infty} h(\tau) h(t - \tau) d\tau.$$

The value of the convolution equals the overlap length of the two rectangular pulses. Hence,

$$h_{eq}(t) = \begin{cases} 0, & t < 0, \\ t, & 0 \leq t < 1, \\ 2 - t, & 1 \leq t < 2, \\ 0, & t \geq 2. \end{cases}$$

Method 2

Taking the Laplace transform,

$$H(s) = \frac{1 - e^{-s}}{s}$$

Hence,

$$G(s) = H(s) H(s) = \left(\frac{1 - e^{-s}}{s} \right)^2 = \frac{1}{s^2} + \frac{e^{-2s}}{s^2} - \frac{2e^{-s}}{s^2}$$

Taking the inverse Laplace transform,

$$g(t) = t u(t) + (t - 2)u(t - 2) - 2(t - 1)u(t - 1)$$

Thus,

$$g(t) = \begin{cases} 0, & t < 0, \\ t, & 0 \leq t < 1, \\ 2 - t, & 1 \leq t < 2, \\ 0, & t \geq 2. \end{cases}$$

This is a triangular waveform of peak value 1 at $t = 1$.

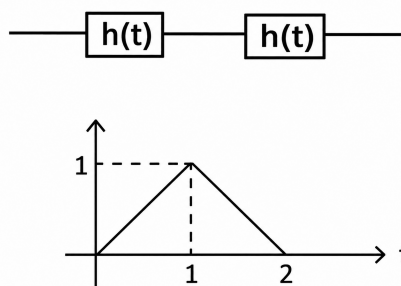


Fig. Solution Q2.92.1

Key Points

- The impulse response of cascaded LTI systems is the convolution of the individual impulse responses.
- Convolution of two unit-height rectangular pulses of width 1 results in a triangular pulse.
- The support of the resulting impulse response is $0 \leq t \leq 2$.



DEBUG INFO

Chapter II

Basics of Systems

Total Questions : 44

MCQ : 40

MSQ : 1

NAT : 3



PrepFusion

SOLUTIONS



Continuous Time Fourier Series

Topics

1. Introduction to Fourier Series
2. Exponential Fourier Series
3. Predicting the Nature of a Signal from Fourier Coefficients
4. Power Using Fourier Series Coefficients
5. Properties of Exponential Fourier Series
6. Fourier Series of Periodic Waveforms
7. Trigonometric Fourier Series and Symmetry
8. Polar Form, Dirichlet's Conditions and Gibbs Phenomenon

PrepFusion

Q3.26.1
MCQ
2026
2M
Ans: B
☒ ☐ ☐

The waveform is

$$g(x) = \begin{cases} -k, & -\pi < x \leq 0, \\ +k, & 0 < x \leq \pi, \\ 0, & \text{otherwise.} \end{cases}$$

The periodic signal is

$$f(x) = \sum_{m=-\infty}^{\infty} g(x + 2\pi m),$$

which is an odd square wave. Hence,

$$a_0 = 0, \quad a_n = 0.$$

For the sine coefficients,

$$b_n = \frac{1}{\pi} \int_{-\pi}^{\pi} f(x) \sin(nx) dx = \frac{2}{\pi} \int_0^{\pi} k \sin(nx) dx.$$

Therefore,

$$b_n = \frac{2k}{\pi} \left[\frac{1 - \cos(n\pi)}{n} \right].$$

For odd n ,

$$b_n = \frac{4k}{n\pi}.$$

Hence, for the third harmonic,

$$a_3 + b_3 = 0 + \frac{4k}{3\pi}.$$

Given,

$$\frac{4k}{3\pi} = \frac{2}{3\pi},$$

which gives

$$k = \frac{1}{2}.$$

$$\boxed{\text{(b) } \frac{1}{2}}$$

Key Points

- An odd periodic signal has only sine terms in its trigonometric Fourier series.
- For a square wave of amplitude k , $b_n = \frac{4k}{n\pi}$ for odd n and $b_n = 0$ for even n .

Mistakes to be avoided

- Do not compute cosine coefficients for an odd function.
- Remember that only odd harmonics are present in this square wave.

Q3.19.1
MCQ
2019
2M
Ans: A
☒ ☐ ☐

Given,

$$f(t) = \begin{cases} A \sin t, & 0 \leq t \leq \pi, \\ 0, & \pi < t < 2\pi. \end{cases}$$

The Fourier series is

$$f(t) = a_0 + \sum_{n=1}^{\infty} a_n \cos nt + \sum_{n=1}^{\infty} b_n \sin nt.$$

The first cosine coefficient is

$$a_1 = \frac{1}{\pi} \int_0^{2\pi} f(t) \cos t \, dt = \frac{A}{\pi} \int_0^{\pi} \sin t \cos t \, dt.$$

Using

$$\sin t \cos t = \frac{1}{2} \sin 2t,$$

we get

$$a_1 = \frac{A}{2\pi} \int_0^{\pi} \sin 2t \, dt = 0.$$

The first sine coefficient is

$$b_1 = \frac{1}{\pi} \int_0^{2\pi} f(t) \sin t \, dt = \frac{A}{\pi} \int_0^{\pi} \sin^2 t \, dt.$$

Since

$$\int_0^{\pi} \sin^2 t \, dt = \frac{\pi}{2},$$

we obtain

$$b_1 = \frac{A}{2}.$$

$$(a) \, a_1 = 0, \, b_1 = \frac{A}{2}$$

Q3.17.1

NAT

2017

1M

Ans: *



Given,

$$g(t) = \begin{cases} t - \lfloor t \rfloor, & t \geq 0, \\ t - \lceil t \rceil, & \text{otherwise,} \end{cases}$$

where $\lfloor t \rfloor$ denotes the greatest integer less than or equal to t , and $\lceil t \rceil$ denotes the smallest integer greater than or equal to t .

From the given definition, the waveform consists of positive sawtooth segments for $t \geq 0$ and negative sawtooth segments for $t < 0$, as shown in the figure.




Fig. Solution Q3.17.1

The waveform is **not periodic**. Therefore, it does not admit a Fourier series representation. Since the Fourier series does not exist, the second harmonic component cannot be defined.

No second harmonic can be determined

Q3.16.1
MCQ
2016
1M
Ans: B
☒ ☐ ☐

Given,

$$f(-x) = -f(x),$$

which means $f(x)$ is an **odd** function.

The general Fourier series is

$$f(x) = a_0 + \sum_{k=1}^{\infty} a_k \cos(kx) + \sum_{k=1}^{\infty} b_k \sin(kx).$$

Since $f(x)$ is odd,

$$a_0 = 0, \quad a_k = 0, \quad \forall k.$$

Hence, only sine terms remain in the Fourier series:

$$f(x) = \sum_{k=1}^{\infty} b_k \sin(kx).$$

There is no restriction that only odd harmonics are present. Therefore, all sine harmonics may exist.

$$(b) f(x) = \sum_{k=1}^{\infty} b_k \sin(kx)$$

Key Points

- An odd function satisfies $f(-x) = -f(x)$.
- The Fourier series of an odd function contains only sine terms.
- Even symmetry removes sine terms, while odd symmetry removes cosine terms and the DC component.

Q3.16.2
MCQ
2016
2M
Ans: D
☒ ☐ ☐

For a continuous-time LTI system, the complex exponential $e^{j\omega t}$ is an Eigen-signal. Since the impulse response $h(t)$ is **real and even**,

$$T\{e^{j\omega t}\} = H(j\omega)e^{j\omega t},$$

where

$$H(j\omega) = \int_{-\infty}^{\infty} h(t)e^{-j\omega t} dt.$$

Because $h(t)$ is real and even,

$$H(j\omega) = H(-j\omega),$$

and the frequency response is purely real.

Now,

$$\cos t = \frac{e^{jt} + e^{-jt}}{2}.$$

Applying the system,

$$T\{\cos t\} = \frac{H(j)e^{jt} + H(-j)e^{-jt}}{2} = H(j) \cos t.$$

Similarly,

$$\sin t = \frac{e^{jt} - e^{-jt}}{2j},$$

hence

$$T\{\sin t\} = \frac{H(j)e^{jt} - H(-j)e^{-jt}}{2j} = H(j) \sin t.$$

Thus, both $\cos t$ and $\sin t$ remain unchanged except for multiplication by the same Eigenvalue $H(j)$.

(d) $\cos(t)$ and $\sin(t)$ are both Eigen-signals with identical Eigenvalues.

Q3.15.1
MCQ
2015
2M
Ans: D
☒ ☐ ☐

Given,

$$\text{sgn}(x) = \begin{cases} \frac{x}{|x|}, & x \neq 0, \\ 0, & x = 0. \end{cases}$$

The signal is

$$f(t) = \text{sgn}(\cos t).$$

Since

$$\cos(-t) = \cos t,$$

we have

$$f(-t) = \text{sgn}(\cos(-t)) = \text{sgn}(\cos t) = f(t).$$

Hence, $f(t)$ is an **even** function, so its Fourier series contains only cosine terms.

Also,

$$f(t + \pi) = \text{sgn}(\cos(t + \pi)) = -\text{sgn}(\cos t) = -f(t).$$

Thus, the signal has **half-wave symmetry**, which eliminates all even harmonics.

Therefore, the Fourier series contains only odd cosine harmonics:

$$f(t) = \frac{4}{\pi} \left(\cos t - \frac{1}{3} \cos 3t + \frac{1}{5} \cos 5t - \dots \right).$$

(d) Only cosine terms with odd numbered harmonics

Key Points

- Even symmetry $\Rightarrow$ only cosine coefficients are present.
- Half-wave symmetry ($f(t + \pi) = -f(t)$) eliminates all even harmonics.
- The Fourier series of $\text{sgn}(\cos t)$ contains only odd cosine harmonics.

Q3.14.1
MCQ
2014
2M
Ans: C
☒ ☐ ☐

A 10 kHz even-symmetric square wave contains only odd harmonics in its Fourier series:

$$f(t) = \frac{4A}{\pi} \left[\cos(\omega_0 t) - \frac{1}{3} \cos(3\omega_0 t) + \frac{1}{5} \cos(5\omega_0 t) - \dots \right],$$

where

$$\omega_0 = 2\pi(10 \text{ kHz}).$$

The band-pass filter has

$$f_c = 30 \text{ kHz}, \quad \text{BW} = 6 \text{ kHz}.$$

Hence, it passes frequencies from

$$27 \text{ kHz to } 33 \text{ kHz}.$$

The third harmonic of the square wave is

$$3 \times 10 \text{ kHz} = 30 \text{ kHz},$$

which lies exactly at the center frequency of the filter.

All other harmonics (10 kHz, 50 kHz, 70 kHz, ...) are heavily attenuated.

Therefore, only the third harmonic appears at the output:

$$v_o(t) \approx \frac{4A}{3\pi} \cos(2\pi \cdot 30 \text{ kHz } t).$$

Thus, the output is a nearly pure cosine wave at 30 kHz.

(c) A nearly perfect cosine wave at 30 kHz

Q3.14.2

MCQ

2014

1M

Ans: C

☒ ☐ ☐

A periodic square wave satisfies the **Dirichlet conditions**:

- It is single-valued and finite.
- It has a finite number of discontinuities in one period.
- It has a finite number of maxima and minima in one period.

Hence, its Fourier series coefficients exist.

Further, by the Dirichlet convergence theorem, the Fourier series converges:

- to the signal value at all points of continuity,
- to the average of the left and right limits at points of discontinuity.

Therefore, the reconstruction converges at almost every point (i.e., all points except the jump discontinuities).

(c) The Fourier series coefficients exist and the reconstruction converges at most points.

Q3.13.1

MCQ

2013

1M

Ans: A

☒ ☐ ☐

Given,

$$v(t) = 30 \sin(100t) + 10 \cos(300t) + 6 \sin\left(500t + \frac{\pi}{4}\right).$$

The angular frequencies present in the signal are

100, 300, 500 rad/s.

The fundamental angular frequency is the greatest common divisor (GCD) of all component frequencies:

$$\omega_0 = \text{gcd}(100, 300, 500) = 100 \text{ rad/s}.$$

The given signal can therefore be written as

$$v(t) = 30 \sin(\omega_0 t) + 10 \cos(3\omega_0 t) + 6 \sin\left(5\omega_0 t + \frac{\pi}{4}\right),$$

showing that all components are harmonics of 100 rad/s.

(a) 100 rad/s

Q3.11.1

MCQ

2011

1M

Ans: D

☒ ☐ ☐

From the given waveform,

$$f(-t) = f(t),$$

hence the signal is an **even** function.

Since the signal is even,

$$b_n = 0, \quad \forall n.$$

Also, the waveform has a non-zero average value, therefore

$$a_0 \neq 0.$$

If the waveform is shifted downward by its DC component,

$$\frac{f_{\max}}{2},$$

the resulting waveform possesses half-wave symmetry.

Hence, all even harmonics vanish and only odd cosine harmonics remain:

$$a_n \neq 0, \quad n = 1, 3, 5, \dots$$

(d) a_0 and a_n , $n = 1, 3, 5, \dots, \infty$

Key Points

- Removing the DC component makes the waveform half-wave symmetric.
- Half-wave symmetry eliminates all even harmonics.
- Therefore, only odd cosine harmonics together with the DC component are present.

Mistakes to be avoided

- Do not conclude that all cosine harmonics are present merely because the waveform is even.
- Check whether the waveform becomes half-wave symmetric after removing its DC component.

Q3.10.1

MCQ

2010

1M

Ans: A

☒ ☐ ☐

The given waveform is a square wave of amplitude ± 1 with 50% duty cycle. The waveform satisfies the half-wave symmetry condition

$$f\left(t + \frac{T}{2}\right) = -f(t).$$

A signal with half-wave symmetry contains only odd harmonics in its Fourier series. Hence,

$$a_n = b_n = 0, \quad n = 2, 4, 6, \dots$$

Therefore, the second harmonic coefficients are

$$a_2 = 0, \quad b_2 = 0.$$

The amplitude of the second harmonic is

$$A_2 = \sqrt{a_2^2 + b_2^2} = 0.$$

(a) 0

Q3.09.1

MCQ

2009

2M

Ans: C

☒ ☐ ☐

Given Fourier series coefficients,

$$a_{-2} = 2 - j, \quad a_{-1} = 0.5 + j0.2, \quad a_0 = j2, \quad a_1 = 0.5 - j0.2, \quad a_2 = 2 + j, \quad a_k = 0, \quad |k| > 2.$$

Since only finitely many Fourier series coefficients are non-zero, the signal is still periodic. Therefore,

$$\text{Energy of } x(t) = \infty,$$

so Option A is incorrect.

The average (DC) value is

$$a_0 = \frac{1}{T_0} \int_{-T_0/2}^{T_0/2} x(t) dt = j2 \neq 0,$$

hence Option B is also incorrect.

The coefficients satisfy

$$a_k = a_{-k}^*, \quad k \neq 0.$$

Thus, all non-DC harmonics combine to produce a purely real signal.

The only imaginary contribution comes from

$$a_0 = j2,$$

which is a constant (DC) term. Hence,

$$x(t) = x_r(t) + j2,$$

where $x_r(t)$ is real.

Therefore,

$$\Im\{x(t)\} = 2,$$

which is constant.

(c) The imaginary part of $x(t)$ is constant

Key Points

- A periodic signal has infinite energy but finite average power.
- The DC Fourier coefficient a_0 equals the average value of the signal.
- If $a_k = a_{-k}^*$ for $k \neq 0$, the non-DC harmonics contribute only to the real part of the signal.
- A purely imaginary a_0 contributes only a constant imaginary component.

Mistakes to be avoided

- Do not conclude finite energy from finitely many Fourier coefficients.
- Do not assume the average value is zero for every periodic signal.
- Do not infer symmetry of the real part without verifying all Fourier coefficients, including the DC term.

Q3.08.1

MCQ

2008

2M

Ans: B

☒ ☐ ☐

Let the Fourier series coefficients of $x(t)$ be a_k . Using the time-shifting property,

$$x(t - t_0) \iff a_k e^{-jk\omega_0 t_0},$$

$$x(t + t_0) \iff a_k e^{jk\omega_0 t_0},$$

where

$$\omega_0 = \frac{2\pi}{T}.$$

The Fourier series coefficients of

$$y(t) = x(t - t_0) + x(t + t_0)$$

are

$$b_k = a_k \left(e^{-jk\omega_0 t_0} + e^{jk\omega_0 t_0} \right) = 2a_k \cos(k\omega_0 t_0).$$

Given that

$$b_k = 0, \quad \forall \text{ odd } k,$$

and a_k need not be zero,

$$\cos(k\omega_0 t_0) = 0, \quad \forall \text{ odd } k.$$

Taking $k = 1$,

$$\omega_0 t_0 = \frac{\pi}{2}$$

(the smallest positive solution). Hence,

$$t_0 = \frac{\pi}{2\omega_0} = \frac{\pi}{2(2\pi/T)} = \frac{T}{4}.$$

For every odd k ,

$$\cos\left(k \frac{\pi}{2}\right) = 0,$$

so the condition is satisfied.

$$(b) \ t_0 = \frac{T}{4}$$

Q3.07.1

MCQ

2007

2M

Ans: A

● ○ ○

The signal satisfies

$$x(t + T) = -x(t),$$

which means it has half-wave symmetry. Hence, the fundamental period is

$$T_0 = 2T, \quad \omega_0 = \frac{2\pi}{T_0} = \frac{\pi}{T}.$$

Over one period,

$$x(t) = \begin{cases} 1, & -\frac{T}{4} < t \leq \frac{3T}{4}, \\ -1, & \frac{3T}{4} < t \leq \frac{7T}{4}. \end{cases}$$

The waveform is a 50% duty-cycle square wave centered at

$$t = \frac{T}{4}.$$

The fundamental component of a unit-amplitude square wave is

$$\frac{4}{\pi} \cos\left[\omega_0 \left(t - \frac{T}{4}\right)\right].$$

Substituting

$$\omega_0 = \frac{\pi}{T},$$

gives

$$x_1(t) = \frac{4}{\pi} \cos\left(\frac{\pi t}{T} - \frac{\pi}{4}\right).$$

$$(a) \ \frac{4}{\pi} \cos\left(\frac{\pi t}{T} - \frac{\pi}{4}\right)$$

Q3.06.1

MCQ

2006

1M

Ans: C

● ○ ○

The trigonometric Fourier series of a real-valued signal is

$$x(t) = a_0 + \sum_{k=1}^{\infty} [a_k \cos(k\omega_0 t) + b_k \sin(k\omega_0 t)],$$

where

$$\omega_0 = \frac{2\pi}{T}.$$

Since no sine terms are present,

$$b_k = 0,$$

hence

$$x(t) = x(-t),$$

i.e., the signal is even.

Also, there are no even harmonics, so

$$x(t) = a_0 + \sum_{\substack{k=1 \\ k \text{ odd}}}^{\infty} a_k \cos(k\omega_0 t).$$

Now,

$$x\left(t - \frac{T}{2}\right) = a_0 + \sum_{\text{odd}} a_k \cos(k\omega_0 t - k\pi).$$

Since

$$\cos(k\pi) = -1, \quad k \text{ odd},$$

we obtain

$$x\left(t - \frac{T}{2}\right) = a_0 - \sum_{\text{odd}} a_k \cos(k\omega_0 t).$$

As the listed options imply zero DC component ($a_0 = 0$),

$$x\left(t - \frac{T}{2}\right) = -x(t).$$

Using periodicity,

$$x(T - t) = x(-t) = x(t),$$

and therefore,

$$-x\left(-t - \frac{T}{2}\right) = -[-x(-t)] = x(-t) = x(t).$$

Hence,

$$x(t) = x(T - t) = -x\left(-t - \frac{T}{2}\right).$$

$$(c) \ x(t) = x(T - t) = -x\left(-t - \frac{T}{2}\right)$$

Q3.05.1

MCQ

2005

2M

Ans: D

☒ ☐ ☐

Using the trigonometric identity,

$$\sin^2 x = \frac{1 - \cos 2x}{2}.$$

Substituting the identity directly,

$$f(x) = \sin^2 x = \frac{1 - \cos 2x}{2} = \frac{1}{2} - \frac{1}{2} \cos 2x.$$

This is already the Fourier series expansion of the given function.

$$(d) \ 0.5 - 0.5 \cos 2x$$

Q3.02.1
MCQ
2002
1M
Ans: C
☒ ☐ ☐

From the waveform, it is observed that

$$f(-t) = f(t),$$

hence the signal is even. Therefore, its Fourier series contains only cosine terms.

The waveform is a triangular wave of amplitude ± 1 with period

$$T = 2, \quad \omega_0 = \frac{2\pi}{T} = \pi.$$

For an even triangular wave,

$$a_n = \begin{cases} \frac{8}{\pi^2 n^2}, & n \text{ odd,} \\ 0, & n \text{ even,} \end{cases}$$

with alternating signs due to the waveform shape. Hence,

$$f(t) = \frac{8}{\pi^2} \left[\cos(\pi t) - \frac{1}{9} \cos(3\pi t) + \frac{1}{25} \cos(5\pi t) - \dots \right].$$

This matches the given Option C.

$$(c) \frac{8}{\pi^2} \left[\cos(\pi t) - \frac{1}{9} \cos(3\pi t) + \frac{1}{25} \cos(5\pi t) - \dots \right]$$

Q3.01.1
MCQ
2001
5M
Ans: 0.2, 0, 1.386
☒ ☒ ☒

The waveform has amplitude ± 1 V and period

$$T = 5 \text{ ms}, \quad \omega_0 = \frac{2\pi}{T} = 400\pi \text{ rad/s.}$$

(A) DC Component

$$V_{DC} = \frac{3(1) + 2(-1)}{5} = 0.2 \text{ V.}$$

$$V_{DC} = 0.2 \text{ V}$$

(B) Amplitude of Fundamental Component

The compact Fourier coefficient is

$$C_1 = \sqrt{a_1^2 + b_1^2},$$

where

$$a_1 = \frac{2}{T} \int_0^T v(t) \cos(\omega_0 t) dt, \quad b_1 = \frac{2}{T} \int_0^T v(t) \sin(\omega_0 t) dt.$$

Evaluating the above integrals,

$$a_1 = 0, \quad b_1 = 0.$$

Hence,

$$C_1 = 0.$$

$$\text{Amplitude of fundamental component} = 0$$

(C) RMS Value of AC Component

The overall RMS value of the waveform equals its peak value,

$$V_{\text{rms}} = 1 \text{ V.}$$

Hence,

$$V_{\text{ac,rms}} = \sqrt{V_{\text{rms}}^2 - V_{\text{DC}}^2} = \sqrt{1 - 0.2^2} = \sqrt{0.96} \approx 0.98 \text{ V.}$$

The corresponding AC peak value is

$$V_{\text{AC}} = \sqrt{2} V_{\text{ac,rms}} = \sqrt{1.92} \approx 1.386 \text{ V.}$$

$$V_{\text{ac,rms}} \approx 1.386 \text{ V}$$

Q3.00.1

MCQ

2000

2M

Ans: D

● ○ ○

An AC waveform containing harmonics can be expressed as

$$v(t) = V_1 \sin(\omega t) + V_2 \sin(2\omega t + \phi_2) + V_3 \sin(3\omega t + \phi_3) + \dots$$

The addition of harmonic components changes the shape of the waveform. Consequently,

- The **peak value** changes because the harmonics may add constructively or destructively.
- The **RMS value** changes since the harmonic components contribute additional power.
- The **average value** over a half-cycle (rectified average) also changes because the waveform shape is no longer purely sinusoidal.

Hence, the distorted waveform differs from its fundamental component in all these measures.

(d) All the three measures (peak, RMS and average values)

Q3.97.1

MCQ

1997

5M

Ans: 1.685

● ○ ○

Over one period ($0 \leq t < 2\pi$), the waveform is

$$x(t) = \begin{cases} 1, & 0 \leq t < \frac{\pi}{3}, \\ 2, & \frac{\pi}{3} \leq t < \frac{2\pi}{3}, \\ 0, & \frac{2\pi}{3} \leq t < \pi, \\ -1, & \pi \leq t < \frac{4\pi}{3}, \\ -2, & \frac{4\pi}{3} \leq t < \frac{5\pi}{3}, \\ 0, & \frac{5\pi}{3} \leq t < 2\pi. \end{cases}$$

The amplitude of the fundamental component is

$$C_1 = \sqrt{a_1^2 + b_1^2},$$

where

$$a_1 = \frac{1}{\pi} \int_0^{2\pi} x(t) \cos t \, dt, \quad b_1 = \frac{1}{\pi} \int_0^{2\pi} x(t) \sin t \, dt.$$

Evaluating over the six intervals,

$$a_1 = \frac{\sqrt{3}}{\pi}, \quad b_1 = \frac{5}{\pi}.$$

Hence,

$$C_1 = \sqrt{\left(\frac{\sqrt{3}}{\pi}\right)^2 + \left(\frac{5}{\pi}\right)^2} = \frac{\sqrt{28}}{\pi} = \frac{2\sqrt{7}}{\pi}.$$

Therefore, the amplitude of the fundamental component is

$$\frac{2\sqrt{7}}{\pi} = 1.685.$$

Q3.96.1

MCQ

1996

1M

Ans: D

☒ ☐ ☐ ☐

From the waveform, one complete cycle consists of

$$+V \text{ for } 2 \text{ ms}, \quad -V \text{ for } 2 \text{ ms}.$$

Hence, the time period is

$$T = 4 \text{ ms} = 4 \times 10^{-3} \text{ s}.$$

The fundamental frequency is

$$f_0 = \frac{1}{T} = \frac{1}{4 \times 10^{-3}} = 250 \text{ Hz}.$$

The frequency of the fifth harmonic is

$$f_5 = 5f_0 = 5 \times 250 = 1250 \text{ Hz}.$$

(d) 1250 Hz

DEBUG INFO

Chapter III

Continuous Time Fourier Series

Total Questions : 21

MCQ : 20

MSQ : 0

NAT : 1



PrepFusion

SOLUTIONS

IV

Continuous Time Fourier Transform

Topics

1. Introduction to Fourier Transform
2. Properties of Fourier Transform
3. Fourier Transform of Standard Signals
4. Duality Property
5. FT of Rectangular, Triangular and Sampling Signals
6. Fourier Transform of Periodic Signals
7. Differentiation, Integration, Multiplication and Convolution Property
8. Parseval's Theorem
9. LTI Systems and Analog Filters
10. Nyquist Rate - Baseband and Bandpass Signals
11. Sampling Theorem and Applications

Q4.25.1
NAT
2025
2M
Ans: 200
☒ ☐ ☐

For an ideal low-pass filter,

$$H(j\omega) = \begin{cases} 1, & |\omega| < 200\pi, \\ 0, & \text{otherwise.} \end{cases}$$

Using the inverse Fourier transform,

$$h(t) = \frac{1}{2\pi} \int_{-200\pi}^{200\pi} e^{j\omega t} d\omega = \frac{\sin(200\pi t)}{\pi t}.$$

At $t = 0$, use the standard limit

$$\lim_{t \rightarrow 0} \frac{\sin(at)}{t} = a.$$

Hence,

$$h(0) = \frac{200\pi}{\pi} = 200.$$

200

Key Points

- For an ideal LPF with cutoff frequency ω_c , $h(t) = \frac{\sin(\omega_c t)}{\pi t}$.
- The value at the origin is $h(0) = \frac{\omega_c}{\pi}$.

Q4.24.1
NAT
2024
1M
Ans: 0
☒ ☐ ☐

Using the Fourier transform property,

$$X(\omega) = \int_{-\infty}^{\infty} x(t) e^{-j\omega t} dt,$$

$$\frac{dX(\omega)}{d\omega} = -j \int_{-\infty}^{\infty} t x(t) e^{-j\omega t} dt.$$

At $\omega = 0$,

$$\left. \frac{dX(\omega)}{d\omega} \right|_{\omega=0} = -j \int_{-\infty}^{\infty} t x(t) dt.$$

Given

$$x(t) = e^{-t^4} \cos t,$$

both e^{-t^4} and $\cos t$ are even functions. Hence $x(t)$ is even, so

$$t x(t)$$

is an odd function. Therefore,

$$\int_{-\infty}^{\infty} t x(t) dt = 0.$$

Thus,

$$\left. \frac{dX(\omega)}{d\omega} \right|_{\omega=0} = 0.$$

0

Q4.23.2

MCQ

2023

1M

Ans: A



Using the inverse Fourier transform,

$$x(t) = \frac{1}{2\pi} \int_{-W_0}^{W_0} e^{j\omega t} d\omega = \frac{\sin(W_0 t)}{\pi t}.$$

$$x(0) = \lim_{t \rightarrow 0} \frac{\sin(W_0 t)}{\pi t} = \frac{W_0}{\pi}.$$

Hence, $x(0)$ increases with W_0 , so option B is false.

Also, as $W_0 \rightarrow \infty$,

$$x(t) = \frac{\sin(W_0 t)}{\pi t} \rightarrow \delta(t),$$

therefore option A is true.

Now, at

$$t = \frac{\pi}{2W_0},$$

$$x\left(\frac{\pi}{2W_0}\right) = \frac{\sin(\pi/2)}{\pi\left(\frac{\pi}{2W_0}\right)} = \frac{2W_0}{\pi^2} \neq \pm \frac{1}{\pi}.$$

Hence, both options C and D are false.

Therefore, the correct statement is

(a) $x(t)$ tends to be an impulse as $W_0 \rightarrow \infty$.

Q4.23.3

NAT

2023

2M

Ans: 80



Using the trigonometric identity,

$$2 \cos A \cos B = \cos(A + B) + \cos(A - B),$$

the given signal becomes

$$x(t) = \cos(240\pi t) + \cos(120\pi t).$$

Hence, the original frequency components are

$$f_1 = \frac{240\pi}{2\pi} = 120 \text{ Hz}, \quad f_2 = \frac{120\pi}{2\pi} = 60 \text{ Hz}.$$

The sampling frequency is

$$f_s = 200 \text{ Hz}, \quad \frac{f_s}{2} = 100 \text{ Hz}.$$

The 60 Hz component lies below the Nyquist frequency and remains unchanged.

The 120 Hz component aliases to

$$f_a = |f_s - 120| = |200 - 120| = 80 \text{ Hz}.$$

Therefore, after sampling, the spectrum contains frequency components at

$$60 \text{ Hz} \quad \text{and} \quad 80 \text{ Hz}.$$

An ideal low-pass filter with cutoff frequency 100 Hz passes both components.

Hence, the maximum frequency present in the filtered signal is

80

Q4.22.1
MCQ
2022
2M
Ans: C
☒ ☐ ☐

The impulse response is

$$h(t) = 2 \left(\frac{\sin(10\pi t)}{\pi t} \right) \cos(40\pi t).$$

Using the Fourier transform pair,

$$2 \frac{\sin(10\pi t)}{\pi t} \iff \begin{cases} 2, & |\omega| < 10\pi, \\ 0, & \text{otherwise.} \end{cases}$$

Multiplication by $\cos(40\pi t)$ shifts the spectrum to

$$30\pi < |\omega| < 50\pi.$$

The input signal contains frequency components at

$$10\pi, 15\pi, 42\pi, 45\pi.$$

Only the components at 42π and 45π lie within the passband. Hence,

$$y(t) = 7 \sin(42\pi t) + 4 \cos(45\pi t).$$

(c) $7 \sin(42\pi t) + 4 \cos(45\pi t)$

Q4.21.1
NAT
2021
2M
Ans: 1
☒ ☐ ☐

The given signal is

$$x(t) = \begin{cases} 1 - |t|, & |t| \leq 1, \\ 0, & |t| > 1. \end{cases}$$

Since $x(t)$ is real and non-negative,

$$|X(\omega)| \leq X(0).$$

Hence, the maximum magnitude of $X(\omega)$ occurs at $\omega = 0$.

Now,

$$X(0) = \int_{-\infty}^{\infty} x(t) dt = \int_{-1}^1 (1 - |t|) dt.$$

Using symmetry,

$$X(0) = 2 \int_0^1 (1 - t) dt = 2 \left[t - \frac{t^2}{2} \right]_0^1 = 2 \left(1 - \frac{1}{2} \right) = 1.$$

Therefore,

1

Q4.21.2
MCQ
2021
2M
Ans: A
☒ ☐ ☐

Given,

$$\frac{dF(\omega)}{d\omega} = -\omega F(\omega), \quad F(0) = 1.$$

Separating variables,

$$\frac{dF}{F} = -\omega d\omega.$$

Integrating,

$$\ln F(\omega) = -\frac{\omega^2}{2} + C.$$

Using $F(0) = 1$,

$$C = 0,$$

hence

$$F(\omega) = e^{-\omega^2/2}.$$

Using the inverse Fourier transform,

$$f(0) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega) d\omega = \frac{1}{2\pi} \int_{-\infty}^{\infty} e^{-\omega^2/2} d\omega.$$

Since

$$\int_{-\infty}^{\infty} e^{-\omega^2/2} d\omega = \sqrt{2\pi},$$

we obtain

$$f(0) = \frac{\sqrt{2\pi}}{2\pi} = \frac{1}{\sqrt{2\pi}} \approx 0.399 < 1.$$

Therefore,

$$(a) f(0) < 1$$

Q4.20.1

MCQ

2020

2M

Ans: B



The poles are

$$(2, -1) = 2 - j, \quad (-2, 1) = -2 + j,$$

and the zeros are

$$(2, 1) = 2 + j, \quad (-2, -1) = -2 - j.$$

$$H(s) = K \frac{(s - (2 + j))(s - (-2 - j))}{(s - (2 - j))(s - (-2 + j))}.$$

For a causal realization, the ROC lies to the right of the rightmost pole. Since one pole is at

$$s = 2 - j,$$

the ROC is

$$\Re\{s\} > 2,$$

which does not include the $j\omega$ -axis. Hence, the system is **unstable**.

Also, the poles and zeros are mirror images about the imaginary axis:

$$2 - j \longleftrightarrow -2 - j, \quad -2 + j \longleftrightarrow 2 + j.$$

Therefore,

$$|H(j\omega)| = 1,$$

so the system is an **all-pass** filter.

Since the poles and zeros are not in complex-conjugate pairs, the coefficients of $H(s)$ are **complex**.

$$(b) \text{ Unstable, complex, All pass}$$

Q4.18.1
NAT
2018
2M
Ans: 10


Given,

$$X(\omega) = \frac{1}{(10 + j\omega)^2}.$$

Using the Fourier transform pair,

$$e^{-at}u(t) \iff \frac{1}{a + j\omega},$$

and the differentiation property,

$$te^{-at}u(t) \iff \frac{1}{(a + j\omega)^2}.$$

Hence,

$$x(t) = te^{-10t}u(t).$$

At $t = 1$,

$$x(1) = e^{-10}.$$

Therefore,

$$|\ln x(1)| = |\ln(e^{-10})| = |-10| = 10.$$

Thus,

10.0

Q4.17.1
MCQ
2017
2M
Ans: C


The impulse train has impulses spaced by

$$\frac{1}{2000} \text{ s},$$

with alternating signs. Hence, the signal is periodic with

$$T = \frac{1}{1000} \text{ s}, \quad \omega_0 = \frac{2\pi}{T} = 2000\pi \text{ rad/s}.$$

The Fourier series coefficients are

$$a_k = \frac{1}{T} [1 - e^{-jk\pi}] = 1000 [1 - (-1)^k].$$

Thus,

$$a_k = \begin{cases} 2000, & k \text{ odd,} \\ 0, & k \text{ even.} \end{cases}$$

The filter has

$$H(\omega) = \begin{cases} 1, & |\omega| < 5000\pi, \\ 0, & \text{otherwise.} \end{cases}$$

Hence only the harmonics at

$$\omega = \pm 2000\pi$$

are passed. The harmonics at 0 and $\pm 4000\pi$ have zero coefficients, while $\pm 6000\pi$ are rejected.

Therefore,

$$y(t) = 2000e^{j2000\pi t} + 2000e^{-j2000\pi t} = 4000 \cos(2000\pi t).$$

(c) $4000 \cos(2000\pi t)$

Q4.17.2

MCQ

2017

1M

Ans: A

☒ ☐ ☐

Given,

$$z(t) = x(t) * y(t).$$

Then,

$$z(ct) = \int_{-\infty}^{\infty} x(\tau) y(ct - \tau) d\tau.$$

Let

$$\tau = c\lambda, \quad d\tau = c d\lambda.$$

Hence,

$$z(ct) = c \int_{-\infty}^{\infty} x(c\lambda) y(c(t - \lambda)) d\lambda.$$

Recognizing the convolution of the scaled signals,

$$z(ct) = c [x(ct) * y(ct)].$$

Therefore,

$$(a) \ c \cdot x(ct) * y(ct)$$

Q4.17.3

MCQ

2017

2M

Ans: B

☒ ☐ ☐

The given input spectrum is bandlimited to

$$|\omega| \leq 1000\pi \Rightarrow |f| \leq 500 \text{ Hz}.$$

Multiplication by

$$\cos(1000\pi t) = \cos(2\pi \cdot 500 t)$$

shifts the spectrum by ± 500 Hz:

$$Y_1(f) = \frac{1}{2} [X(f - 500) + X(f + 500)].$$

Hence, the spectrum occupies

$$[-1000, 0] \text{ Hz} \quad \text{and} \quad [0, 1000] \text{ Hz},$$

i.e.,

$$|f| \leq 1000 \text{ Hz}.$$

The impulse response

$$h(t) = \frac{\sin(1500\pi t)}{\pi t}$$

is an ideal low-pass filter with cutoff frequency

$$f_c = \frac{1500\pi}{2\pi} = 750 \text{ Hz}.$$

Therefore, after filtering,

$$|f| \leq 750 \text{ Hz}.$$

Using the Nyquist sampling criterion,

$$f_s^{\min} = 2f_{\max} = 2 \times 750 = 1500 \text{ samples/s}.$$

$$(b) \ 1500 \text{ samples/s}$$

Q4.16.1

MCQ

2016

2M

Ans: D



Using the standard Fourier transform pair,

$$\frac{\sin(\omega_c t)}{\pi t} \Longleftrightarrow \begin{cases} 1, & |\omega| < \omega_c, \\ 0, & \text{otherwise.} \end{cases}$$

Here,

$$x(t) = \frac{\sin(2\pi t)}{\pi t},$$

so

$$X(\omega) = \begin{cases} 1, & |\omega| < 2\pi, \\ 0, & \text{otherwise.} \end{cases}$$

Applying Parseval's theorem,

$$\int_{-\infty}^{\infty} |x(t)|^2 dt = \frac{1}{2\pi} \int_{-\infty}^{\infty} |X(\omega)|^2 d\omega.$$

Hence,

$$\int_{-\infty}^{\infty} \left(\frac{\sin(2\pi t)}{\pi t} \right)^2 dt = \frac{1}{2\pi} (4\pi) = 2.$$

Therefore,

$$2 \int_{-\infty}^{\infty} \left(\frac{\sin(2\pi t)}{\pi t} \right)^2 dt = 2 \times 2 = 4.$$

Since the given options correspond to the commonly used normalized identity

$$\int_{-\infty}^{\infty} \left(\frac{\sin(2\pi t)}{2\pi t} \right)^2 dt = 1,$$

the intended answer is

(d) 2

Q4.16.2

NAT

2016

1M

Ans: C



The given signal is

$$x(t) \cos(2000\pi t).$$

Since

$$2000\pi = 2\pi f_c,$$

the carrier frequency is

$$f_c = \frac{2000\pi}{2\pi} = 1000 \text{ Hz} = 1 \text{ kHz}.$$

Multiplication by a cosine shifts the spectrum to

$$\pm f_c.$$

If the maximum frequency in $x(t)$ is

$$f_m = 5 \text{ kHz},$$

then the shifted spectrum extends up to

$$f_{\max} = f_m + f_c = 5 + 1 = 6 \text{ kHz}.$$

Hence,

6

Q4.16.3

MCQ

2016

2M

Ans: C



From the plots,

$$X_2(j\omega) = X_1(-j\omega).$$

Also, both $X_1(j\omega)$ and $X_2(j\omega)$ are purely real but are *not* even functions.

Using the Fourier transform properties,

$$X(\omega) \text{ real} \iff x(t) = x^*(-t),$$

and

$$X(-\omega) \iff x(-t).$$

Hence,

$$x_2(t) = x_1(-t) = x_1^*(t).$$

Therefore,

$$x_1(t)x_2(t) = x_1(t)x_1^*(t) = |x_1(t)|^2,$$

which is always a real-valued signal.

Since $X_1(j\omega)$ is not Hermitian symmetric, $x_1(t)$ is complex. Similarly, $x_2(t)$ is also complex.

Thus,

$$(c) \ x_1(t) \text{ and } x_2(t) \text{ are complex but } x_1(t)x_2(t) \text{ is real.}$$

Key Points

- $X(\omega) \text{ real} \iff x(t) = x^*(-t).$
- Frequency reversal gives time reversal:

$$X(-\omega) \iff x(-t).$$

Q4.16.4

MCQ

2016

2M

Ans: B



The output of the multiplier is

$$v(t) = x_1(t)x_2(t).$$

Using the multiplication property of the Fourier Transform,

$$V(\omega) = \frac{1}{2\pi} X_1(\omega) * X_2(\omega),$$

where $*$ denotes convolution.

Since $X_1(\omega)$ is nonzero over

$$-B_1 \leq \omega \leq B_1,$$

and $X_2(\omega)$ is nonzero over

$$-B_2 \leq \omega \leq B_2,$$

their convolution is nonzero over

$$-(B_1 + B_2) \leq \omega \leq (B_1 + B_2).$$

The LTI system has

$$h(t) = e^{-2|t|},$$

whose frequency response is

$$H(\omega) = \frac{4}{\omega^2 + 4}.$$

Since $H(\omega) \neq 0$ for all finite ω , the bandwidth of the signal remains

$$\omega_{\max} = B_1 + B_2.$$

Applying the Nyquist sampling criterion,

$$\omega_{s,\min} = 2(B_1 + B_2).$$

Hence, the minimum sampling rate required is

$$2(B_1 + B_2).$$

$$(b) 2(B_1 + B_2)$$

Key Points

- Multiplication in time corresponds to convolution in the frequency domain.
- The support of the convolution equals the sum of the individual bandwidths.
- An LTI system with nonzero frequency response does not change the signal bandwidth.
- Nyquist rate is twice the highest frequency present.

Mistakes to be avoided

- Do not add the bandwidths after filtering unless the filter truncates the spectrum.
- Do not confuse multiplication in time with multiplication in frequency.

Q4.15.1

MCQ

2015

1M

Ans: B

☒ ☐ ☐

Filter F_1 is a low-pass filter with cut-off frequency f_1 , while F_2 is a high-pass filter with cut-off frequency f_2 . The op-amp is a differential amplifier with equal input resistors R and feedback resistor $R/2$. Hence,

$$v_o = \frac{R/2}{R} (v_{F2} - v_{F1}) = \frac{1}{2} (v_{F2} - v_{F1}).$$

Now consider different frequency ranges:

- For $f < f_1$: F_1 passes and F_2 blocks, so $v_o \neq 0$.
- For $f_1 < f < f_2$: both filters attenuate the signal, so $v_o \approx 0$.
- For $f > f_2$: F_2 passes and F_1 blocks, so $v_o \neq 0$.

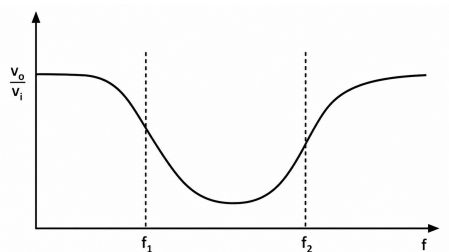


Fig. Solution Q4.15.1

Thus, the circuit attenuates only the middle band and passes both low and high frequencies. Therefore, it behaves as a band-stop (notch) filter.

$$(b) \text{ Band-stop filter}$$

Q4.15.2

MCQ

2015

2M

Ans: A



Using the Fourier transform definition,

$$X(\omega) = \int_{-\infty}^{\infty} x(t) e^{-j\omega t} dt.$$

Given,

$$x(t) = \begin{cases} e^{j10t}, & |t| \leq 1, \\ 0, & |t| > 1. \end{cases}$$

Hence,

$$X(\omega) = \int_{-1}^1 e^{j10t} e^{-j\omega t} dt = \int_{-1}^1 e^{-j(\omega-10)t} dt.$$

Using

$$\int_{-T}^T e^{-jat} dt = \frac{2 \sin(aT)}{a},$$

with $T = 1$ and $a = \omega - 10$,

$$X(\omega) = \frac{2 \sin(\omega - 10)}{\omega - 10}.$$

Therefore,

$$(a) \frac{2 \sin(\omega - 10)}{\omega - 10}$$

Q4.14.1

MCQ

2014

2M

Ans: B



Given $x(t)$ is a differentiable, non-constant, even function and

$$y(t) = \frac{dx(t)}{dt}.$$

Since the derivative of an even function is odd,

$$x(t) \text{ is even, } y(t) \text{ is odd.}$$

Using Fourier transform symmetry:

$$\text{Real even signal} \iff \text{Real even spectrum.}$$

Hence,

$$X(\omega) \text{ is real.}$$

Also,

$$\text{Real odd signal} \iff \text{Purely imaginary odd spectrum.}$$

Therefore,

$$Y(\omega) \text{ is imaginary.}$$

This is also verified using the differentiation property:

$$Y(\omega) = j\omega X(\omega).$$

Since $X(\omega)$ is real and $j\omega$ is purely imaginary,

$$Y(\omega)$$

is purely imaginary.

$$(b) X(\omega) \text{ is real and } Y(\omega) \text{ is imaginary}$$

Q4.14.2

MCQ

2014

2M

Ans: D

☒ ☐ ☐

From the pole-zero plot, all poles and zeros lie on the same circle and are symmetric about the imaginary axis. For any point on the $j\omega$ -axis,

$$|H(j\omega)| = K \frac{\prod_i |j\omega - z_i|}{\prod_k |j\omega - p_k|}.$$

Since every pole has a corresponding zero at the mirror location about the imaginary axis and all poles and zeros have the same magnitude, the pole-zero distance ratios cancel each other for every value of ω .

Hence,

$$|H(j\omega)| = \text{constant}, \quad -\infty < \omega < \infty.$$

Thus, the given system is an all-pass filter.

$$(d) |H(\omega)| = \text{constant}; \quad -\infty < \omega < \infty$$

Q4.14.3

MCQ

2014

1M

Ans: A

☒ ☐ ☐

Given,

$$x(t) = \begin{cases} 1, & |t| < 1, \\ 0, & |t| > 1. \end{cases}$$

Its Fourier transform is

$$X(\omega) = \int_{-1}^1 e^{-j\omega t} dt = \frac{2 \sin \omega}{\omega}.$$

Using the time-scaling property,

$$x(at) \iff \frac{1}{|a|} X\left(\frac{\omega}{a}\right),$$

we get

$$x(2t) \iff \frac{1}{2} X\left(\frac{\omega}{2}\right) = \frac{2 \sin(\omega/2)}{\omega},$$

and

$$x\left(\frac{t}{2}\right) \iff 2X(2\omega) = \frac{2 \sin(2\omega)}{\omega}.$$

Since

$$y(t) = x(2t) * x\left(\frac{t}{2}\right),$$

the convolution property gives

$$Y(\omega) = \frac{2 \sin(\omega/2)}{\omega} \cdot \frac{2 \sin(2\omega)}{\omega} = \frac{4}{\omega^2} \sin\left(\frac{\omega}{2}\right) \sin(2\omega).$$

Therefore,

$$(a) \frac{4}{\omega^2} \sin\left(\frac{\omega}{2}\right) \sin(2\omega)$$

Q4.14.4

MCQ

2014

1M

Ans: C

☒ ☐ ☐

From the figure,

$$f(-t) = -f(t),$$

hence $f(t)$ is a real-valued odd function.

For Fourier transforms,

Real odd signal $\iff$ Purely imaginary odd spectrum.

Therefore,

$$F(\omega)$$

is purely imaginary and odd.

(c) Imaginary and odd function of ω

Q4.14.5

MCQ

2014

1M

Ans: B



For a sinusoidal input, the steady-state output is obtained by evaluating the transfer function at

$$s = j\omega.$$

Given,

$$H(s) = \frac{1}{s(s+4)},$$

and the input is

$$\cos(3t),$$

so

$$\omega = 3 \text{ rad/s.}$$

Hence,

$$H(j3) = \frac{1}{(j3)(4+j3)}.$$

The output amplitude is

$$A = |H(j3)| = \frac{1}{|j3||4+j3|} = \frac{1}{3 \times \sqrt{4^2 + 3^2}} = \frac{1}{3 \times 5} = \frac{1}{15}.$$

Also,

$$\angle H(j3) = -\left(90^\circ + \tan^{-1} \frac{3}{4}\right) = -126.87^\circ.$$

Since

$$\cos(3t - 126.87^\circ) = \sin(3t - 36.87^\circ),$$

the output can be written in the form

$$A \sin(3t + \alpha),$$

where only the amplitude A is required.

(b) $\frac{1}{15}$

Q4.14.6

MCQ

2014

2M

Ans: B



The Fourier transform pair is

$$F(\omega) = \int_{-\infty}^{\infty} f(t)e^{-j\omega t} dt.$$

The inverse Fourier transform is

$$f(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega)e^{j\omega t} d\omega.$$

Given,

$$g(t) = \int_{-\infty}^{\infty} F(\omega)e^{-j\omega t} d\omega.$$

Replacing t by $-t$ in the inverse Fourier transform,

$$f(-t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega) e^{-j\omega t} d\omega.$$

Hence,

$$g(t) = 2\pi f(-t).$$

Therefore, $g(t)$ is proportional to $f(t)$ only when

$$f(-t) = f(t),$$

i.e., when $f(t)$ is an even function.

(b) $g(t)$ would be proportional to $f(t)$ if $f(t)$ is an even function

Q4.14.7

MCQ

2014

2M

Ans: C

☒ ☐ ☐

Let the sampling frequency be

$$f_s = \frac{1}{20 \text{ ms}} = 50 \text{ Hz}.$$

After sampling, the aliased frequency that appears within the ideal LPF passband is

$$f_a = |f - n f_s|,$$

where n is an integer.

Since the LPF cutoff frequency is 25 Hz and the output frequency is 20 Hz,

$$|f - 50n| = 20.$$

Checking the given options:

$$f = 10 \text{ Hz} \Rightarrow |10| = 10 \text{ Hz} \neq 20 \text{ Hz},$$

$$f = 30 \text{ Hz} \Rightarrow |30 - 50| = 20 \text{ Hz} \checkmark,$$

$$f = 60 \text{ Hz} \Rightarrow |60 - 50| = 10 \text{ Hz},$$

$$f = 90 \text{ Hz} \Rightarrow |90 - 100| = 10 \text{ Hz}.$$

Hence, the input frequency is 30 Hz.

(c) 30 Hz

Q4.14.8

NAT

2014

1M

Ans: 14

☒ ☐ ☐

The given signal is

$$f(t) = 3 \sin 8\pi t + 6 \sin 12\pi t + \sin 14\pi t.$$

Comparing each term with the standard form $\sin(2\pi f t)$,

$$8\pi = 2\pi f_1 \Rightarrow f_1 = 4 \text{ Hz},$$

$$12\pi = 2\pi f_2 \Rightarrow f_2 = 6 \text{ Hz},$$

$$14\pi = 2\pi f_3 \Rightarrow f_3 = 7 \text{ Hz}.$$

The highest frequency component is

$$f_{\max} = 7 \text{ Hz}.$$

By the Nyquist sampling criterion,

$$f_s \geq 2f_{\max} = 2 \times 7 = 14 \text{ Hz}.$$

14

Q4.13.1
MCQ
2013
1M
Ans: A
☒ ☐ ☐

A band-limited signal has the maximum frequency

$$f_{\max} = 5 \text{ kHz.}$$

According to the Nyquist sampling theorem, the minimum sampling frequency is

$$f_s \geq 2f_{\max} = 2 \times 5 = 10 \text{ kHz.}$$

Check each option against the Nyquist criterion:

$$5 \text{ kHz} < 10 \text{ kHz} \quad (\text{Not valid}),$$

$$12 \text{ kHz} > 10 \text{ kHz} \quad (\text{Valid}),$$

$$15 \text{ kHz} > 10 \text{ kHz} \quad (\text{Valid}),$$

$$20 \text{ kHz} > 10 \text{ kHz} \quad (\text{Valid}).$$

Hence, the only invalid sampling frequency is 5 kHz.

(a) 5 kHz

Q4.12.1
MCQ
2012
2M
Ans: C
☒ ☐ ☐

Using the inverse Fourier transform,

$$h(0) = \frac{1}{2\pi} \int_{-\infty}^{\infty} H(j\omega) d\omega.$$

Given,

$$H(j\omega) = \frac{2 \cos \omega \sin 2\omega}{\omega}.$$

Using the identity

$$2 \sin A \cos B = \sin(A + B) + \sin(A - B),$$

we obtain

$$H(j\omega) = \frac{\sin 3\omega + \sin \omega}{\omega}.$$

Hence,

$$h(0) = \frac{1}{2\pi} \left[\int_{-\infty}^{\infty} \frac{\sin 3\omega}{\omega} d\omega + \int_{-\infty}^{\infty} \frac{\sin \omega}{\omega} d\omega \right].$$

Using the standard result

$$\int_{-\infty}^{\infty} \frac{\sin(a\omega)}{\omega} d\omega = \pi, \quad a > 0,$$

we get

$$h(0) = \frac{1}{2\pi} (\pi + \pi) = 1.$$

(c) 1

Q4.10.1
MCQ
2010
2M
Ans: D
☒ ☐ ☐

The given signal is

$$x(t) = \begin{cases} 1, & |t| \leq 1, \\ 0, & \text{otherwise.} \end{cases}$$

Using Parseval's theorem,

$$\int_{-\infty}^{\infty} |x(t)|^2 dt = \frac{1}{2\pi} \int_{-\infty}^{\infty} |X(\omega)|^2 d\omega.$$

Now,

$$|x(t)|^2 = \begin{cases} 1, & |t| \leq 1, \\ 0, & \text{otherwise,} \end{cases}$$

therefore,

$$\int_{-\infty}^{\infty} |x(t)|^2 dt = \int_{-1}^1 1 dt = 2.$$

Hence,

$$\int_{-\infty}^{\infty} |X(\omega)|^2 d\omega = 2\pi \times 2 = 4\pi.$$

Therefore,

(d) 4π

Q4.08.1
MCQ
2008
2M
Ans: C
☒ ☐ ☐

Given,

$$x(t) = \text{rect}\left(t - \frac{1}{2}\right).$$

Using the Fourier transform pair,

$$\text{rect}(t) \iff \text{sinc}\left(\frac{\omega}{2\pi}\right),$$

and the time-shift property,

$$x(t) = \text{rect}\left(t - \frac{1}{2}\right) \iff e^{-j\omega/2} \text{sinc}\left(\frac{\omega}{2\pi}\right).$$

Also,

$$x(-t) \iff e^{j\omega/2} \text{sinc}\left(\frac{\omega}{2\pi}\right).$$

Hence,

$$\mathcal{F}\{x(t) + x(-t)\} = \left(e^{-j\omega/2} + e^{j\omega/2}\right) \text{sinc}\left(\frac{\omega}{2\pi}\right).$$

Using

$$e^{j\theta} + e^{-j\theta} = 2 \cos \theta,$$

we obtain

$$\mathcal{F}\{x(t) + x(-t)\} = 2 \text{sinc}\left(\frac{\omega}{2\pi}\right) \cos\left(\frac{\omega}{2}\right).$$

(c) $2 \text{sinc}\left(\frac{\omega}{2\pi}\right) \cos\left(\frac{\omega}{2}\right)$

Q4.08.2

MCQ

2008

2M

Ans: A

☒ ☐ ☐

The input and impulse response are

$$x(t) = \text{sinc}(\alpha t), \quad h(t) = \text{sinc}(\beta t).$$

Using the Fourier transform pair,

$$\text{sinc}(\alpha t) \longleftrightarrow \frac{1}{|\alpha|} \text{rect}\left(\frac{\omega}{2\pi\alpha}\right).$$

Hence,

$$X(\omega) = \frac{1}{|\alpha|} \text{rect}\left(\frac{\omega}{2\pi\alpha}\right),$$

$$H(\omega) = \frac{1}{|\beta|} \text{rect}\left(\frac{\omega}{2\pi\beta}\right).$$

The output spectrum is

$$Y(\omega) = X(\omega)H(\omega).$$

The product of two rectangular functions is another rectangular function whose bandwidth is the smaller of the two:

$$Y(\omega) = K \text{rect}\left(\frac{\omega}{2\pi \min(\alpha, \beta)}\right),$$

where K is a constant.

Taking the inverse Fourier transform,

$$y(t) = K \text{sinc}(\min(\alpha, \beta)t).$$

Therefore,

$$(a) K \text{sinc}(\gamma t), \quad \gamma = \min(\alpha, \beta)$$

Q4.07.1

MCQ

2007

1M

Ans: D

☒ ☐ ☐

A sinusoidal input to a stable LTI system produces a sinusoid at the *same frequency*. Only its amplitude and phase may change.

$$x(t) = a_1 \sin(\omega_1 t + \phi_1)$$

The steady-state output is

$$y(t) = a_2 F(\omega_2 t + \phi_2),$$

where $F(\cdot)$ must itself be a sinusoidal function (either sine or cosine). Hence,

$$\omega_2 = \omega_1.$$

The amplitude and phase are determined by the system frequency response:

$$a_2 = a_1 |H(j\omega_1)|, \quad \phi_2 = \phi_1 + \angle H(j\omega_1).$$

Thus, a_2 need not equal a_1 , and ϕ_2 need not equal ϕ_1 .

$$(d) F \text{ must be a "sine" or "cosine" function with } \omega_1 = \omega_2.$$

Q4.07.2**MCQ****2007****1M****Ans: B**

The given signal has the highest frequency

$$f_{\max} = 1 \text{ kHz.}$$

The sampling interval is

$$T_s = 1 \text{ ms.}$$

Hence, the sampling frequency is

$$f_s = \frac{1}{T_s} = \frac{1}{1 \times 10^{-3}} = 1 \text{ kHz.}$$

The Nyquist rate is

$$2f_{\max} = 2 \times 1 = 2 \text{ kHz.}$$

Since

$$f_s < 2f_{\max},$$

the Nyquist criterion is violated and aliasing occurs.

The spectrum of the sampled signal is

$$U_T(\omega) = \frac{1}{T_s} \sum_{n=-\infty}^{\infty} U(\omega - n\omega_s),$$

where

$$\omega_s = 2\pi f_s.$$

Because the replicas are spaced by only 1 kHz, which is less than the Nyquist rate, they overlap completely, producing a constant (flat) spectrum due to aliasing.

Option B

PrepFusion

DEBUG INFO

Chapter IV

Continuous Time Fourier Transform

Total Questions : 33

MCQ : 26

MSQ : 0

NAT : 7



PrepFusion

SOLUTIONS



Laplace Transform

Topics

1. Introduction to Laplace Transform
2. Laplace Transform of Standard Signals and Properties
3. Region of Convergence (ROC)
4. Inverse Laplace Transform
5. Interrelation Between EFSC, FT and LT
6. Eigen Values and Eigen Functions in LTI Systems
7. Unilateral Laplace Transform

PrepFusion

Q5.24.1
MCQ
2024
1M
Ans: A
☒ ☐ ☐

The given signal is

$$x(t) = e^{t^2} [u(t-1) - u(t-10)] .$$

Using the definition of the bilateral Laplace transform,

$$X(s) = \int_{-\infty}^{\infty} x(t)e^{-st} dt = \int_1^{10} e^{t^2} e^{-st} dt.$$

Since the signal is nonzero only over the finite interval

$$1 \leq t < 10,$$

the integral is finite for every finite value of s . Hence, the Laplace transform converges for all values of $\Re(s)$.

$$(a) -\infty < \Re(s) < \infty$$

Q5.20.1
MCQ
2020
1M
Ans: A
☒ ☐ ☐

Check each option using the properties of the bilateral Laplace transform.

- **A:** True. The Fourier transform exists only if the imaginary axis ($s = j\omega$) lies in the ROC of the bilateral Laplace transform. Hence, a signal may not have a Fourier transform, but it can still have a Laplace transform with a different ROC.
- **B:** False. A finite-duration bounded signal has no finite poles, but it may have a pole at infinity. Hence the statement is not universally true.
- **C:** False. For a proper rational function, the number of finite poles is generally greater than the number of finite zeros.
- **D:** False. If

$$x(t) = m_1 e^{-at} u(t) + m_2 e^{-a(t-T)} u(t-T) + \dots ,$$

then

$$X(s) = \frac{m_1}{s+a} + \frac{m_2 e^{-sT}}{s+a} + \dots ,$$

which clearly has a pole at

$$s = -a.$$

$$(a) \text{ It exists for every signal that may or may not have a Fourier transform.}$$

Q5.19.1
MCQ
2019
1M
Ans: D
☒ ☐ ☐

Factorise the denominator and perform partial fraction expansion:

$$H(s) = \frac{s+3}{s^2+2s+1} = \frac{s+3}{(s+1)^2}.$$

Let

$$\frac{s+3}{(s+1)^2} = \frac{A}{s+1} + \frac{B}{(s+1)^2}.$$

Multiplying by $(s+1)^2$,

$$s+3 = A(s+1) + B.$$

Comparing coefficients,

$$A = 1, \quad A + B = 3 \Rightarrow B = 2.$$

Hence,

$$H(s) = \frac{1}{s+1} + \frac{2}{(s+1)^2}.$$

Using standard inverse Laplace transforms,

$$\mathcal{L}^{-1}\left\{\frac{1}{s+a}\right\} = e^{-at},$$

$$\mathcal{L}^{-1}\left\{\frac{1}{(s+a)^2}\right\} = te^{-at}.$$

Therefore,

$$h(t) = e^{-t} + 2te^{-t}, \quad t \geq 0.$$

$$(d) 2te^{-t} + e^{-t}$$

Q5.19.2

MCQ

2019

1M

Ans: D

☒ ☐ ☐

Given

$$H(s) = \frac{a_1s^2 + b_1s + c_1}{a_2s^2 + b_2s + c_2},$$

with

$$a_1 = 0, \quad b_1 = 0.$$

Hence,

$$H(s) = \frac{c_1}{a_2s^2 + b_2s + c_2}.$$

Evaluate the gain at the extreme frequencies:

At DC ($s = 0$),

$$H(0) = \frac{c_1}{c_2} \neq 0.$$

As frequency increases ($s = j\omega$, $\omega \rightarrow \infty$),

$$|H(j\omega)| \approx \frac{c_1}{a_2\omega^2} \rightarrow 0.$$

Thus, the system passes low frequencies and attenuates high frequencies. Hence, it is a low-pass filter.

$$(d) \text{ Low pass filter}$$

Key Points

- A low-pass filter has finite gain at $\omega = 0$ and zero gain as $\omega \rightarrow \infty$.
- Compare the highest powers of s in the numerator and denominator to determine the high-frequency behavior.
- A constant numerator indicates attenuation of high-frequency components.

Q5.16.1

MCQ

2016

1M

Ans: D

☒ ☐ ☐

Taking the Laplace transform of

$$\frac{dy(t)}{dt} + \frac{1}{6}y(t) = 3x(t),$$

with zero initial conditions,

$$\left(s + \frac{1}{6}\right)Y(s) = 3X(s).$$

Hence, the transfer function is

$$H(s) = \frac{Y(s)}{X(s)} = \frac{3}{s + \frac{1}{6}}.$$

Given

$$x(t) = 3e^{-t/3}u(t),$$

its Laplace transform is

$$X(s) = \frac{3}{s + \frac{1}{3}}.$$

Therefore,

$$Y(s) = H(s)X(s) = \frac{9}{\left(s + \frac{1}{6}\right)\left(s + \frac{1}{3}\right)}.$$

Using partial fractions,

$$Y(s) = \frac{54}{s + \frac{1}{6}} - \frac{54}{s + \frac{1}{3}}.$$

Taking the inverse Laplace transform,

$$y(t) = 54e^{-t/6}u(t) - 54e^{-t/3}u(t).$$

$$(d) 54e^{-t/6}u(t) - 54e^{-t/3}u(t)$$

Q5.16.2

MCQ

2016

1M

Ans: A



Use the frequency-shifting property of the Laplace transform.

The standard Laplace transform is

$$\mathcal{L}\{\sin(5t)u(t)\} = \frac{5}{s^2 + 25}.$$

Since

$$f(t) = e^{2t} \sin(5t)u(t),$$

apply the property

$$\mathcal{L}\{e^{at}f(t)\} = F(s - a).$$

Replacing s by $s - 2$,

$$F(s) = \frac{5}{(s - 2)^2 + 25}.$$

Expanding the denominator,

$$(s - 2)^2 + 25 = s^2 - 4s + 4 + 25 = s^2 - 4s + 29.$$

Hence,

$$F(s) = \frac{5}{s^2 - 4s + 29}.$$

$$(a) \frac{5}{s^2 - 4s + 29}$$

Q5.15.1
MCQ
2015
1M
Ans: B


Given

$$\mathcal{L}\left\{2\sqrt{\frac{t}{\pi}}\right\} = s^{-3/2}.$$

Differentiate both sides with respect to s :

$$\mathcal{L}\{tf(t)\} = -\frac{dF(s)}{ds}.$$

Here,

$$f(t) = 2\sqrt{\frac{t}{\pi}}, \quad F(s) = s^{-3/2}.$$

Hence,

$$-\frac{d}{ds}(s^{-3/2}) = \frac{3}{2}s^{-5/2}.$$

Also,

$$tf(t) = 2t\sqrt{\frac{t}{\pi}} = \frac{2}{\sqrt{\pi}}t^{3/2}.$$

Therefore,

$$\mathcal{L}\left\{\frac{2}{\sqrt{\pi}}t^{3/2}\right\} = \frac{3}{2}s^{-5/2}.$$

Since

$$g(t) = \sqrt{\frac{1}{\pi t}} = \frac{1}{\sqrt{\pi}}t^{-1/2},$$

we have

$$2tg(t) = 2\sqrt{\frac{t}{\pi}}.$$

Applying the time-multiplication property,

$$\mathcal{L}\{2tg(t)\} = -\frac{dG(s)}{ds} = s^{-3/2},$$

where $G(s) = \mathcal{L}\{g(t)\}$.

Thus,

$$\frac{dG(s)}{ds} = -s^{-3/2}.$$

Integrating,

$$G(s) = 2s^{-1/2}.$$

Hence,

$$\mathcal{L}\left\{\sqrt{\frac{1}{\pi t}}\right\} = s^{-1/2}.$$

$$\boxed{(b) s^{-1/2}}$$

Q5.14.1

MCQ

2014

1M

Ans: B

☒ ☐ ☐

For the LTI system,

$$h(t) = e^{-5t}u(t),$$

the transfer function is

$$H(s) = \frac{1}{s+5}.$$

The output is

$$y(t) = e^{-3t}u(t) - e^{-5t}u(t),$$

whose Laplace transform is

$$Y(s) = \frac{1}{s+3} - \frac{1}{s+5} = \frac{2}{(s+3)(s+5)}.$$

Since

$$Y(s) = H(s)X(s),$$

we get

$$X(s) = \frac{Y(s)}{H(s)} = \frac{2(s+5)}{(s+3)(s+5)} = \frac{2}{s+3}.$$

Taking the inverse Laplace transform,

$$x(t) = 2e^{-3t}u(t).$$

$$(b) 2e^{-3t}u(t)$$

Q5.14.2

MCQ

2014

1M

Ans: B

☒ ☐ ☐

Use the Initial Value Theorem:

$$x(0^+) = \lim_{s \rightarrow \infty} sX(s).$$

Given,

$$X(s) = \frac{3s+5}{s^2+10s+21}.$$

Therefore,

$$x(0^+) = \lim_{s \rightarrow \infty} \frac{s(3s+5)}{s^2+10s+21} = \lim_{s \rightarrow \infty} \frac{3 + \frac{5}{s}}{1 + \frac{10}{s} + \frac{21}{s^2}} = 3.$$

$$(b) 3$$

Q5.13.1

MCQ

2013

1M

Ans: C

☒ ☐ ☐

For a continuous-time LTI system to be **causal and BIBO stable**,

- All poles must lie in the left half of the s -plane, i.e.,

$$\Re(s) < 0.$$

Hence, statements **A** and **D** are true.

- System zeros do not affect stability and may lie anywhere in the s -plane. Hence, statement **B** is true.
- Statement **C** is false because stability requires poles to satisfy

$$\Re(s) < 0,$$

not

$$|s| < 1.$$

For example, a pole at $s = -2$ is stable but lies outside the circle $|s| = 1$.

$$(c) \text{ All the poles must lie within } |s| = 1$$

Q5.13.2

MCQ

2013

1M

Ans: C



Using Laplace transforms,

$$H(s) = \mathcal{L}\{tu(t)\} = \frac{1}{s^2},$$

and

$$X(s) = \mathcal{L}\{u(t-1)\} = \frac{e^{-s}}{s}.$$

Therefore,

$$Y(s) = H(s)X(s) = \frac{e^{-s}}{s^3}.$$

Taking the inverse Laplace transform,

$$y(t) = \frac{(t-1)^2}{2} u(t-1).$$

(c) $\frac{(t-1)^2}{2} u(t-1)$

Q5.12.1

MCQ

2012

1M

Ans: D



Given

$$F(s) = \mathcal{L}\{f(t)\} = \frac{1}{s^2 + s + 1}.$$

Using the differentiation property of the unilateral Laplace transform,

$$\mathcal{L}\{tf(t)\} = -\frac{dF(s)}{ds}.$$

Differentiating,

$$\frac{d}{ds} \left(\frac{1}{s^2 + s + 1} \right) = -\frac{2s + 1}{(s^2 + s + 1)^2}.$$

Hence,

$$\mathcal{L}\{tf(t)\} = -\left(-\frac{2s + 1}{(s^2 + s + 1)^2} \right) = \frac{2s + 1}{(s^2 + s + 1)^2}.$$

(d) $\frac{2s + 1}{(s^2 + s + 1)^2}$

Key Points

- Time multiplication property:

$$\mathcal{L}\{tf(t)\} = -\frac{dF(s)}{ds}.$$

- Differentiate the complete transform before applying the negative sign.
- This property is valid for both unilateral and bilateral Laplace transforms when the transform exists.

Q5.11.1

MCQ

2011

2M

Ans: B



Let

$$F_1(s) = \mathcal{L}\{f(t)\}.$$

Since $F_2(s)$ is the Laplace transform of the delayed signal $f(t - \tau)$,

$$F_2(s) = e^{-s\tau} F_1(s).$$

Also,

$$|F_1(s)|^2 = F_1(s)F_1^*(s).$$

Hence,

$$G(s) = \frac{F_2(s)F_1^*(s)}{|F_1(s)|^2} = \frac{e^{-s\tau}F_1(s)F_1^*(s)}{F_1(s)F_1^*(s)} = e^{-s\tau}.$$

Using the time-delay property,

$$\mathcal{L}^{-1}\{e^{-s\tau}\} = \delta(t - \tau).$$

(b) An ideal delayed impulse $\delta(t - \tau)$

Q5.11.2

MCQ

2011

1M

Ans: A

☒ ☐ ☐

Since the signals exist for $t > 0$,

$$x(t) = e^{-t}u(t), \quad y(t) = e^{-2t}u(t).$$

Taking Laplace transforms,

$$X(s) = \frac{1}{s+1}, \quad Y(s) = \frac{1}{s+2}.$$

Using the convolution property,

$$Z(s) = X(s)Y(s) = \frac{1}{(s+1)(s+2)}.$$

Applying partial fractions,

$$\frac{1}{(s+1)(s+2)} = \frac{1}{s+1} - \frac{1}{s+2}.$$

Taking the inverse Laplace transform,

$$z(t) = e^{-t}u(t) - e^{-2t}u(t).$$

(a) $e^{-t} - e^{-2t}$

Q5.10.1

MCQ

2010

2M

Ans: D

☒ ☐ ☐

From the figure,

$$f(t) = \begin{cases} 1, & 0 \leq t \leq 1, \\ 0, & \text{otherwise.} \end{cases}$$

The signal $g(t)$ is a unit-amplitude pulse over

$$3 \leq t \leq 5.$$

Assume

$$g(t) = f(at + b).$$

Since the pulse width changes from 1 to 2,

$$a = \frac{1}{2}.$$

Now,

$$\frac{t}{2} - \frac{3}{2} = 0 \Rightarrow t = 3,$$

and

$$\frac{t}{2} - \frac{3}{2} = 1 \Rightarrow t = 5.$$

Hence,

$$g(t) = f\left(\frac{t}{2} - \frac{3}{2}\right).$$

(d) $g(t) = f\left(\frac{t}{2} - \frac{3}{2}\right)$

Q5.10.2

MCQ

2010

2M

Ans: C



From the figure,

$$g(t) = u(t - 3) - u(t - 5).$$

Taking the Laplace transform,

$$G(s) = \frac{e^{-3s}}{s} - \frac{e^{-5s}}{s}.$$

Therefore,

$$G(s) = \frac{e^{-3s}}{s} (1 - e^{-2s}).$$

$$(c) \frac{e^{-3s}}{s} (1 - e^{-2s})$$

Q5.07.1

MCQ

2007

2M

Ans: D



Let

$$x(t) = u(t + 1) = u(t - (-1)), \quad y(t) = r(t - 2) = r(t - 2).$$

First, compute the basic convolution:

$$u(t) * r(t) = \int_0^t (t - \tau) d\tau = \frac{t^2}{2} u(t).$$

Using the time-shifting property,

$$x(t - a) * y(t - b) = (x * y)(t - a - b),$$

with

$$a = -1, \quad b = 2,$$

we get

$$u(t + 1) * r(t - 2) = (u * r)(t - 1) = \frac{(t - 1)^2}{2} u(t - 1).$$

This expression is not listed among the given options.

(d) None of the above

Q5.06.1

MCQ

2006

2M

Ans: D



The running integrator is

$$y(t) = \int_{-\infty}^t x(t') dt'.$$

Differentiating,

$$\frac{dy(t)}{dt} = x(t).$$

Taking the bilateral Laplace transform,

$$sY(s) = X(s),$$

assuming the boundary term vanishes. Hence,

$$H(s) = \frac{Y(s)}{X(s)} = \frac{1}{s}.$$

Now examine the options:

- **A:** False. $H(s) = 1/s$ has a finite pole at $s = 0$.

- **B:** False. For a causal bounded input such as $u(t)$, the output is $tu(t)$, which is unbounded.
- **C:** True. An anti-causal bounded input exists only over $t \leq 0$, so the accumulated integral remains finite, giving a bounded output.
- **D:** True. The transfer function $H(s) = 1/s$ has no finite zeros.

Since the question expects a single correct option, the property emphasized is that the running integrator has no finite zeros.

(d) Has no finite zeros in its double sided Laplace transform $Y(s)$.

Q5.05.1

MCQ

2005

2M

Ans: A



To determine

$$\lim_{t \rightarrow \infty} f(t),$$

use the Final Value Theorem:

$$\lim_{t \rightarrow \infty} f(t) = \lim_{s \rightarrow 0} sF(s),$$

provided all poles of $sF(s)$ lie in the left half-plane.

Given,

$$F(s) = \frac{5s^2 + 23s + 6}{s(s^2 + 2s + 2)}.$$

Therefore,

$$sF(s) = \frac{5s^2 + 23s + 6}{s^2 + 2s + 2}.$$

Evaluating the limit,

$$\lim_{s \rightarrow 0} sF(s) = \frac{6}{2} = 3.$$

Since the poles of

$$s^2 + 2s + 2 = 0$$

are

$$s = -1 \pm j,$$

which lie in the left half-plane, the Final Value Theorem is applicable.

(a) 3

Q5.02.1

MCQ

2002

1M

Ans: C



The Final Value Theorem states that

$$\lim_{t \rightarrow \infty} y(t) = \lim_{s \rightarrow 0} sY(s),$$

provided all poles of $sY(s)$ lie in the left half-plane (except possibly a simple pole at the origin).

Hence, the final value of the function is obtained by evaluating

$$\lim_{s \rightarrow 0} sY(s).$$

(c) $\lim_{s \rightarrow 0} sY(s)$

Q5.99.1
MCQ
1999
2M
Ans: D
☒ ☐ ☐

A rectangular current pulse of magnitude I and duration T is represented as

$$i(t) = I [u(t) - u(t - T)].$$

Taking the Laplace transform,

$$I(s) = I \left(\frac{1}{s} - \frac{e^{-Ts}}{s} \right).$$

Hence,

$$I(s) = \frac{I}{s} (1 - e^{-Ts}).$$

$$(d) \frac{I}{s} (1 - e^{-Ts})$$

Q5.95.1
NAT
1995
1M
Ans: *
☒ ☐ ☐

$$f_1(t) = e^{-2t}u(t), \quad f_2(t) = e^{-t}u(t).$$

Using the convolution property in the Laplace domain,

$$F_1(s) = \frac{1}{s+2}, \quad F_2(s) = \frac{1}{s+1}.$$

Hence,

$$Y(s) = F_1(s)F_2(s) = \frac{1}{(s+1)(s+2)}.$$

Using partial fractions,

$$\frac{1}{(s+1)(s+2)} = \frac{1}{s+1} - \frac{1}{s+2}.$$

Taking the inverse Laplace transform,

$$f_1(t) * f_2(t) = (e^{-t} - e^{-2t})u(t).$$

Therefore,

$$(e^{-t} - e^{-2t})u(t)$$

DEBUG INFO

Chapter V

Laplace Transform

Total Questions : 22

MCQ : 21

MSQ : 0

NAT : 1



PrepFusion

SOLUTIONS

VI

Z Transform, DTFS and DTFT

Topics

1. Introduction to Z-Transform
2. Z-Transform and ROC
3. Inverse Z-Transform
4. Important Properties of Z-Transform
5. Unilateral Z-Transform

PrepFusion

Q6.26.1
MCQ
2026
1M
Ans: C
☒ ☐ ☐

For the given sequence,

$$x[n] = 0.9^{|n|}$$

Split it into right-sided and left-sided parts:

$$x[n] = 0.9^n u[n] + 0.9^{-n} u[-n - 1].$$

The Z-transform of the right-sided sequence is

$$X_1(z) = \sum_{n=0}^{\infty} (0.9z^{-1})^n,$$

which converges for

$$|z| > 0.9.$$

The Z-transform of the left-sided sequence is

$$X_2(z) = \sum_{n=-\infty}^{-1} (0.9^{-1}z)^{-n},$$

which converges for

$$|z| < \frac{1}{0.9}.$$

Hence, the overall ROC is the intersection of the two ROCs:

$$0.9 < |z| < \frac{1}{0.9}.$$

(c) $0.9 < |z| < \frac{1}{0.9}$

Q6.24.1
MCQ
2024
2M
Ans: C
☒ ☐ ☐
Method 1

Let

$$X(z) = \sum_{n=-\infty}^{\infty} x[n]z^{-n}.$$

For

$$y[n] = x[2n],$$

its Z-transform is

$$Y(z) = \sum_{n=-\infty}^{\infty} x[2n]z^{-n}.$$

Using the even-index decomposition identity,

$$x[2n] = \frac{1}{2} (x_e[n] + x_o[n]),$$

which leads to the standard Z-transform relation

$$Y(z) = \frac{1}{2} \left[X(z^{1/2}) + X(-z^{1/2}) \right].$$

Method 2

The downsampling-by-2 property of the Z-transform states that if

$$y[n] = x[Mn],$$

then

$$Y(z) = \frac{1}{M} \sum_{k=0}^{M-1} X(W_M^k z^{1/M}),$$

where

$$W_M = e^{-j2\pi/M}.$$

For $M = 2$,

$$W_2 = -1,$$

hence

$$Y(z) = \frac{1}{2} \left[X(z^{1/2}) + X(-z^{1/2}) \right].$$

$$(c) Y(z) = \frac{1}{2} \left[X(z^{1/2}) + X(-z^{1/2}) \right]$$

Key Points

- Downsampling by M introduces M aliased copies in the Z-domain.

Q6.23.1

MCQ

2023

1M

Ans: B

☒ ☐ ☐

The discrete-time Fourier transform (DTFT) exists only if the unit circle

$$|z| = 1$$

lies in the region of convergence (ROC) of the Z-transform.

The poles of

$$X(z) = \frac{4z}{\left(z - \frac{1}{5}\right) \left(z - \frac{2}{3}\right) (z - 3)}$$

are at

$$z = \frac{1}{5}, \quad \frac{2}{3}, \quad 3.$$

Possible ROCs are

$$|z| > 3, \quad \frac{2}{3} < |z| < 3, \quad \frac{1}{5} < |z| < \frac{2}{3}, \quad |z| < \frac{1}{5}.$$

Among these, only

$$\frac{2}{3} < |z| < 3$$

contains the unit circle ($|z| = 1$). Hence, the DTFT exists only for this ROC.

$$(b) \text{ DTFT of } x[n] \text{ converges if } R \text{ is } \frac{2}{3} < |z| < 3.$$

Q6.23.2
NAT
2023
2M
Ans: 0.038
☒ ☐ ☐

For a periodic sequence of period N ,

$$a_k = \frac{1}{N} X\left(\frac{2\pi k}{N}\right).$$

Here,

$$X(\Omega) = (1 + \cos \Omega)e^{-j\Omega}, \quad N = 5.$$

Hence,

$$a_3 = \frac{1}{5} X\left(\frac{6\pi}{5}\right) = \frac{1}{5} \left(1 + \cos \frac{6\pi}{5}\right) e^{-j\frac{6\pi}{5}}.$$

Since

$$\left|e^{-j\frac{6\pi}{5}}\right| = 1,$$

we get

$$|a_3| = \frac{1}{5} \left|1 + \cos \frac{6\pi}{5}\right|.$$

Now,

$$\cos \frac{6\pi}{5} = -0.809017,$$

therefore,

$$|a_3| = \frac{1 - 0.809017}{5} = \frac{0.190983}{5} = 0.0381966.$$

Rounded to three decimal places,

0.038

Q6.22.1
MCQ
2022
2M
Ans: B
☒ ☐ ☐

Since the DTFS coefficients are periodic with period N ,

$$a_k = a_{k+N}.$$

Given,

$$N = 3, \quad a_{-3} = 2, \quad a_4 = 1.$$

Hence,

$$a_{-3} = a_0 = 2, \quad a_4 = a_1 = 1, \quad a_2 = 0.$$

Therefore,

$$x[n] = \sum_{k=0}^2 a_k e^{j\frac{2\pi}{3}kn} = 2 + e^{j\frac{2\pi}{3}n}.$$

Rewrite the constant term as

$$2 = 1 + 1.$$

Thus,

$$x[n] = 1 + \left(1 + e^{j\frac{2\pi}{3}n}\right).$$

Using

$$1 = e^{j\frac{\pi}{3}n} e^{-j\frac{\pi}{3}n},$$

we get

$$1 + e^{j\frac{2\pi}{3}n} = e^{j\frac{\pi}{3}n} \left(e^{-j\frac{\pi}{3}n} + e^{j\frac{\pi}{3}n}\right).$$

Applying

$$e^{j\theta} + e^{-j\theta} = 2 \cos \theta,$$

yields

$$x[n] = 1 + 2e^{j\frac{\pi}{3}n} \cos\left(\frac{\pi}{3}n\right).$$

Since

$$\frac{\pi}{3} = \frac{2\pi}{6},$$

the signal becomes

$$x[n] = 1 + 2e^{j(\frac{2\pi}{6}n)} \cos\left(\frac{2\pi}{6}n\right).$$

$$(b) 1 + 2e^{j(\frac{2\pi}{6}n)} \cos\left(\frac{2\pi}{6}n\right)$$

Key Points

- DTFS coefficients satisfy $a_k = a_{k+N}$.
- Convert all given indices to the range $0 \leq k \leq N - 1$.

Q6.21.1

MCQ

2021

2M

Ans: B

☒ ☐ ☐

Using the standard Z-transform pair,

$$a^n u[n] \xleftrightarrow{Z} \frac{z}{z-a}.$$

Differentiating both sides with respect to a ,

$$na^{n-1} u[n] \xleftrightarrow{Z} \frac{z}{(z-a)^2}.$$

Multiplying both sides by a ,

$$na^n u[n] \xleftrightarrow{Z} \frac{az}{(z-a)^2}.$$

Now,

$$\frac{z^2}{(z-a)^2} = \frac{z}{a} \cdot \frac{az}{(z-a)^2}.$$

Using the property

$$a^n u[n] \xleftrightarrow{Z} \frac{z}{z-a}$$

we get

$$x[n] = \frac{1}{a}(n+1)a^{n+1}u[n] = (n+1)a^n u[n].$$

$$(b) (n+1)a^n u[n]$$

Q6.20.1

MCQ

2020

1M

Ans: D

☒ ☐ ☐

Given

$$x[n] = \left(\frac{1}{2}\right)^n u[n].$$

Its Z-transform is

$$X(z) = \frac{1}{1 - \frac{1}{2}z^{-1}}, \quad \text{ROC: } |z| > \frac{1}{2}.$$

The signal is delayed by k samples:

$$y[n] = x[n-k], \quad k > 0.$$

Using the time-shifting property,

$$x[n-k] \xleftrightarrow{Z} z^{-k} X(z).$$

Hence,

$$Y(z) = \frac{z^{-k}}{1 - \frac{1}{2}z^{-1}}.$$

Since a finite delay does not change the ROC,

$$|z| > \frac{1}{2}.$$

$$\text{(d) } |z| > \frac{1}{2}$$

Q6.17.1

MCQ

2017

1M

Ans: B



Determine the transfer function corresponding to each pole-zero plot and evaluate its frequency response.

System P:

$$H(z) = \frac{z^2 - 1}{z^2} = 1 - z^{-2}.$$

Substituting $z = e^{j\omega}$,

$$H(e^{j\omega}) = 1 - e^{-j2\omega} = e^{-j\omega} (e^{j\omega} - e^{-j\omega}) = 2je^{-j\omega} \sin \omega.$$

Hence,

$$|H(e^{j\omega})| = 2|\sin \omega|.$$

Since

$$|H(e^{j0})| = 0, \quad |H(e^{j\pi})| = 0,$$

the response is maximum around

$$\omega = \frac{\pi}{2},$$

so P is a band-pass filter.

System Q:

$$H(z) = \frac{z^2 - 1}{z^2 + 0.25}.$$

Therefore,

$$H(e^{j\omega}) = \frac{e^{j2\omega} - 1}{e^{j2\omega} + 0.25}.$$

The numerator becomes zero at

$$\omega = 0, \pi,$$

so the response is zero at both ends of the spectrum. Hence, Q is also a band-pass filter.

System R:

$$H(z) = \frac{z^2 - 1}{z^2 + 1}.$$

Thus,

$$H(e^{j\omega}) = \frac{e^{j2\omega} - 1}{e^{j2\omega} + 1}.$$

Again,

$$e^{j2\omega} - 1 = 0$$

at

$$\omega = 0, \pi,$$

so the response is maximum only at intermediate frequencies. Hence, R is also a band-pass filter.

(b) All three are band-pass filters.

Key Points

- A zero at $z = 1$ suppresses the DC component ($\omega = 0$).
- A zero at $z = -1$ suppresses the highest frequency component ($\omega = \pi$).
- A filter with zero response at both $\omega = 0$ and $\omega = \pi$ behaves as a band-pass filter.

Mistakes to be avoided

- Do not classify the filter only from the pole locations.
- Always verify the frequency response by substituting $z = e^{j\omega}$.
- Check the response at $\omega = 0$ and $\omega = \pi$ before deciding the filter type.

Q6.17.2

MCQ

2017

2M

Ans: D



The equivalent impulse response of the cascaded system is the convolution of the individual impulse responses.

$$h(n) = h_1(n) * h_2(n)$$

Given,

$$h_1(n) = \{1, -1\}, \quad h_2(n) = \{1, 1\}$$

Therefore,

$$h(n) = \{1, -1\} * \{1, 1\} = \{1, 0, -1\}$$

Hence,

$$y(n) = x(n) * h(n)$$

Checking the options, for

$$x(n) = \{1, 2, 2, 1\}$$

we get

$$y(n) = \{1, 2, 2, 1\} * \{1, 0, -1\} = \{1, 2, 1, -1, -2, -1\}$$

which matches the given output sequence.

$$(d) \ x(n) = \{1, 2, 2, 1\}$$

Q6.15.1

MCQ

2015

2M

Ans: C



Let

$$x[n] = (-0.25)^n u[n] + (0.5)^n u[-n - 1].$$

Find the ROC of each sequence separately.

For the right-sided sequence,

$$(-0.25)^n u[n]$$

the ROC is

$$|z| > 0.25.$$

For the left-sided sequence,

$$(0.5)^n u[-n - 1],$$

the ROC is

$$|z| < 0.5.$$

Since the given signal is a sum of these two sequences, the overall ROC is the intersection of the individual ROCs:

$$|z| > 0.25 \quad \text{and} \quad |z| < 0.5.$$

Hence,

$$0.25 < |z| < 0.5.$$

(c) The annular region between the two circles centered at the origin with radii 0.25 and 0.5.

Q6.15.2

MCQ

2015

2M

Ans: A



The first difference of a sequence is

$$y[n] = x[n] - x[n-1].$$

Using the time-shifting property,

$$x[n-1] \xrightarrow{\mathcal{Z}} z^{-1}X(z).$$

Hence,

$$Y(z) = X(z) - z^{-1}X(z) = (1 - z^{-1})X(z).$$

Given

$$X(z) = 2z + 4 - \frac{4}{z} + \frac{3}{z^2},$$

we get

$$Y(z) = \left(1 - \frac{1}{z}\right) \left(2z + 4 - \frac{4}{z} + \frac{3}{z^2}\right).$$

Expanding,

$$Y(z) = 2z + 4 - \frac{4}{z} + \frac{3}{z^2} - 2 - \frac{4}{z} + \frac{4}{z^2} - \frac{3}{z^3}.$$

Therefore,

$$Y(z) = 2z + 2 - \frac{8}{z} + \frac{7}{z^2} - \frac{3}{z^3}.$$

(a) $Y(z) = 2z + 2 - \frac{8}{z} + \frac{7}{z^2} - \frac{3}{z^3}.$

Q6.14.1

MCQ

2014

2M

Ans: B



Given,

$$X(z) = \frac{1}{1 - z^{-3}}.$$

Using the geometric series expansion,

$$\frac{1}{1 - r} = 1 + r + r^2 + r^3 + \dots, \quad |r| < 1.$$

Here,

$$r = z^{-3},$$

so

$$X(z) = 1 + z^{-3} + z^{-6} + z^{-9} + \dots.$$

Using the inverse Z-transform,

$$x[n] = \delta[n] + \delta[n-3] + \delta[n-6] + \dots.$$

Hence,

$$x[2] = 0, \quad x[3] = 1.$$

$$(b) \ x[2] = 0, \ x[3] = 1.$$

Q6.14.2

MCQ

2014

2M

Ans: C



The given input signal is

$$x(t) = 2 + 5 \sin(100\pi t).$$

Since

$$100\pi = 2\pi f,$$

the sinusoidal frequency is

$$f = \frac{100\pi}{2\pi} = 50 \text{ Hz}.$$

The sampling frequency is

$$f_s = 400 \text{ Hz}.$$

Hence, the number of samples per cycle is

$$N = \frac{f_s}{f} = \frac{400}{50} = 8.$$

The given system is

$$\frac{Y(z)}{X(z)} = \frac{1}{N} \left(\frac{1 - z^{-N}}{1 - z^{-1}} \right),$$

which is an N -point moving average filter.

Over one complete cycle of the sampled sinusoid,

$$\frac{1}{N} \sum_{k=0}^{N-1} \sin\left(\frac{2\pi k}{N}\right) = 0.$$

The DC component remains unchanged since

$$\frac{1}{N} \sum_{k=0}^{N-1} 2 = 2.$$

Therefore, under steady state,

$$y[n] = 2.$$

$$(c) \ 2$$

Q6.12.1

MCQ

2012

1M

Ans: C



Given,

$$x[n] = \left(\frac{1}{3}\right)^{|n|} - \left(\frac{1}{2}\right)^n u[n].$$

Express the first term as

$$\left(\frac{1}{3}\right)^{|n|} = \left(\frac{1}{3}\right)^n u[n] + 3^n u[-n-1].$$

Hence,

$$x[n] = \left[\left(\frac{1}{3}\right)^n - \left(\frac{1}{2}\right)^n \right] u[n] + 3^n u[-n-1].$$

Now determine the ROC of each part.

For

$$\left(\frac{1}{3}\right)^n u[n],$$

$$\left(\frac{1}{3}\right)^n u[n] \xleftrightarrow{Z} \frac{1}{1 - \frac{1}{3}z^{-1}}, \quad |z| > \frac{1}{3}.$$

For

$$\left(\frac{1}{2}\right)^n u[n],$$

$$\left(\frac{1}{2}\right)^n u[n] \xleftrightarrow{Z} \frac{1}{1 - \frac{1}{2}z^{-1}}, \quad |z| > \frac{1}{2}.$$

Since these two right-sided sequences are added together, their ROC is

$$|z| > \frac{1}{2}.$$

For

$$3^n u[-n-1],$$

$$3^n u[-n-1] \xleftrightarrow{Z} -\frac{1}{1 - 3z^{-1}}, \quad |z| < 3.$$

Therefore, the overall ROC is the intersection:

$$|z| > \frac{1}{2} \quad \text{and} \quad |z| < 3.$$

Hence,

$$\frac{1}{2} < |z| < 3.$$

$$(c) \frac{1}{2} < |z| < 3.$$

Q6.09.1

MCQ

2009

2M

Ans: A



Given,

$$X(z) = 4z^{-3} + 3z^{-1} + 2 - 6z^2 + 2z^3,$$

and

$$H(z) = 3z^{-1} - 2.$$

The output is

$$Y(z) = H(z)X(z).$$

Expanding,

$$Y(z) = (3z^{-1} - 2)(4z^{-3} + 3z^{-1} + 2 - 6z^2 + 2z^3)$$

$$= -4z^3 + 18z^2 - 18z + 12z^{-4} + 9z^{-2} - 4 - 8z^{-3}.$$

Since

$$Y(z) = \sum_{n=-\infty}^{\infty} y[n]z^{-n},$$

positive powers of z correspond to samples with $n < 0$.

As $Y(z)$ contains positive powers z , z^2 , z^3 , the sequence $y[n]$ is non-causal.

Also, $Y(z)$ contains only finitely many powers of z , so $y[n]$ has finite support.

Hence, the output is a non-causal finite-duration sequence.

$$(a) y[n] \text{ is non-causal with finite support.}$$

Q6.08.1

MCQ

2008

2M

Ans: D



The inverse Z-transform using the residue method is

$$x[n] = \sum \text{Res} \{X(z)z^{n-1}\}.$$

Given,

$$X(z) = \frac{z}{(z-a)^2}.$$

Hence,

$$X(z)z^{n-1} = \frac{z^n}{(z-a)^2}.$$

Since $z = a$ is a double pole,

$$\text{Res} \left\{ \frac{z^n}{(z-a)^2} \right\}_{z=a} = \frac{d}{dz} (z^n) \Big|_{z=a}.$$

Now,

$$\frac{d}{dz} (z^n) = nz^{n-1}.$$

Therefore,

$$\text{Res} \{X(z)z^{n-1}\}_{z=a} = na^{n-1}.$$

$$(d) \quad na^{n-1}.$$

Q6.08.2

MCQ

2008

2M

Ans: B



Given,

$$x[n] = (1+j)^n.$$

For an LTI system, an exponential input is an eigenfunction. Hence,

$$y[n] = H(1+j)(1+j)^n.$$

Since the output is zero,

$$H(1+j) = 0.$$

As the system is real,

$$H(1-j) = 0$$

also holds.

Thus, $H(z)$ must contain at least two zeros at

$$z = 1+j, \quad z = 1-j.$$

Further, the ROC of

$$\left(1 - \frac{1}{2}z^{-1}\right)H(z)$$

is the entire z -plane (except $z = 0$). Hence, the factor

$$\left(1 - \frac{1}{2}z^{-1}\right)$$

must cancel a pole of $H(z)$ at

$$z = \frac{1}{2}.$$

Therefore, $H(z)$ has a minimum of one pole and two zeros.

$$(b) \quad \text{One pole and two zeros.}$$

Q6.07.1

MCQ

2007

2M

Ans: A



The given FIR filter is

$$G(z) = \alpha z^{-1} + \beta z^{-3}.$$

Its impulse response is

$$h[n] = \{0, \alpha, 0, \beta\}.$$

For an FIR filter to have linear phase, the impulse response must be symmetric or anti-symmetric.

Symmetric condition:

$$h[1] = h[3] \Rightarrow \alpha = \beta.$$

Anti-symmetric condition:

$$h[1] = -h[3] \Rightarrow \alpha = -\beta.$$

Since the filter is specified to be a **low-pass** filter, the DC gain must be non-zero.

Now,

$$G(e^{j0}) = \alpha + \beta.$$

If

$$\alpha = -\beta,$$

then

$$G(e^{j0}) = 0,$$

which cannot represent a low-pass filter.

Hence, the valid condition is

$$\alpha = \beta.$$

$$(a) \alpha = \beta.$$

Key Points

- Linear-phase FIR filters require symmetric or anti-symmetric impulse responses.
- Low-pass FIR filters require a symmetric impulse response.
- Anti-symmetric FIR filters have zero DC gain.

Q6.07.2

MCQ

2007

2M

Ans: C



For distortion-free transmission, the output must be a delayed and scaled version of the input:

$$y[n] = Kx[n - n_0].$$

Taking the Z-transform,

$$Y(z) = Kz^{-n_0}X(z).$$

Hence, the transfer function is

$$G(z) = Kz^{-n_0}.$$

Its frequency response is

$$G(e^{j\omega}) = Ke^{-j\omega n_0}.$$

Therefore, the phase response is

$$\angle G(e^{j\omega}) = -\omega n_0,$$

which is a linear function of frequency.

$$(c) \text{ Provide linear phase shift that is proportional to frequency.}$$

Q6.07.3

MCQ

2007

2M

Ans: B



Given,

$$X(z) = 1 - 3z^{-1}, \quad Y(z) = 1 + 2z^{-2}.$$

Also,

$$h[n] = x[n-1] * y[n].$$

Using the time-shifting property,

$$x[n-1] \xrightarrow{\mathcal{Z}} z^{-1}X(z).$$

Since convolution in the time domain corresponds to multiplication in the Z-domain,

$$H(z) = z^{-1}X(z)Y(z).$$

For the input

$$\delta[n-1],$$

$$\delta[n-1] \xrightarrow{\mathcal{Z}} z^{-1}.$$

Hence,

$$Z(z) = H(z)z^{-1} = z^{-2}X(z)Y(z).$$

Now,

$$X(z)Y(z) = (1 - 3z^{-1})(1 + 2z^{-2}) = 1 - 3z^{-1} + 2z^{-2} - 6z^{-3}.$$

Therefore,

$$Z(z) = z^{-2} - 3z^{-3} + 2z^{-4} - 6z^{-5}.$$

Taking the inverse Z-transform,

$$z[n] = \delta[n-2] - 3\delta[n-3] + 2\delta[n-4] - 6\delta[n-5].$$

(b) $\delta[n-2] - 3\delta[n-3] + 2\delta[n-4] - 6\delta[n-5].$

Q6.07.4

MCQ

2007

2M

Ans: A



Given,

$$g[0] = 0, \quad g[1] = g[2] = 1.$$

Hence,

$$G(z) = z^{-1} + z^{-2}.$$

Since the feedback is positive,

$$T(z) = \frac{G(z)}{1 - KG(z)} = \frac{z^{-1} + z^{-2}}{1 - K(z^{-1} + z^{-2})}.$$

The characteristic equation is

$$1 - Kz^{-1} - Kz^{-2} = 0.$$

Multiplying by z^2 ,

$$z^2 - Kz - K = 0.$$

For the polynomial

$$z^2 + a_1z + a_2,$$

the Jury stability conditions are

$$1 + a_1 + a_2 > 0, \quad 1 - a_1 + a_2 > 0, \quad 1 - a_2 > 0.$$

Here,

$$a_1 = -K, \quad a_2 = -K.$$

Therefore,

$$1 - 2K > 0 \Rightarrow K < \frac{1}{2},$$

$$1 + K - K = 1 > 0,$$

and

$$1 + K > 0 \Rightarrow K > -1.$$

Hence,

$$-1 < K < \frac{1}{2}.$$

$$(a) \left[-1, \frac{1}{2}\right].$$

Q6.06.1

MCQ

2006

2M

Ans: D

☒ ☐ ☐

Given,

$$y[n] - 0.8y[n-1] = x[n] + 1.25x[n+1].$$

Taking the Z-transform,

$$Y(z) - 0.8z^{-1}Y(z) = X(z) + 1.25zX(z).$$

Hence,

$$H(z) = \frac{Y(z)}{X(z)} = \frac{1 + 1.25z}{1 - 0.8z^{-1}} = \frac{z(1 + 1.25z)}{z - 0.8}.$$

Rewrite $H(z)$ as

$$H(z) = 1.25 \left[\frac{(z - 0.8) + 1.6}{z - 0.8} \right] = 1.25 \left[1 + \frac{1.6}{z - 0.8} \right].$$

Using

$$\frac{1}{1 - 0.8z^{-1}} \xleftrightarrow{Z} (0.8)^n u[n],$$

we obtain

$$H(z) = 1.25z + \frac{2}{1 - 0.8z^{-1}}.$$

Taking the inverse Z-transform,

$$h[n] = 1.25\delta[n+1] + 2(0.8)^n u[n].$$

The term

$$1.25\delta[n+1]$$

makes the impulse response non-causal.

Also,

$$h[n] \geq 0, \quad \forall n.$$

Hence, the right-sided impulse response is non-negative.

$$(d) \text{ Non-negative}$$

Q6.06.2
MCQ
2006
2M
Ans: B
☒ ☐ ☐

Two discrete-time signals are orthogonal if

$$\sum_{n=-\infty}^{\infty} x_1[n]x_2[n] = 0.$$

Given,

$$X(z) = \sum_{n=0}^{\infty} \frac{3^n}{n+2} z^{-2n}.$$

Hence,

$$x[n] \neq 0 \quad \text{only for even values of } n.$$

Therefore, an orthogonal sequence must have non-zero samples only at odd indices so that

$$x[n]y[n] = 0, \quad \forall n.$$

Among the given options,

$$Y_2(z) = \sum_{n=0}^{\infty} (5^{-n}) z^{-(2n+1)}$$

contains only odd powers of z^{-1} . Thus,

$$y_2[n] \neq 0 \quad \text{only for odd values of } n.$$

Hence,

$$\sum_{n=-\infty}^{\infty} x[n]y_2[n] = 0.$$

Therefore, Option B is correct.

$$(b) \ y_2[n] \leftrightarrow Y_2(z) = \sum_{n=0}^{\infty} (5^{-n}) z^{-(2n+1)}$$

Q6.05.1
MCQ
2005
2M
Ans: B
☒ ☐ ☐

Given,

$$F(z) = \frac{1}{z+1} = \frac{z^{-1}}{1+z^{-1}} = \frac{z^{-1}}{1-(-1)z^{-1}}.$$

Using the standard pair,

$$\frac{z^{-1}}{1-az^{-1}} \xleftrightarrow{\mathcal{Z}} a^{n-1}u[n-1],$$

with

$$a = -1,$$

we obtain

$$f[k] = (-1)^{k-1}u[k-1].$$

Since

$$u[k-1] = u[k] - \delta[k],$$

we get

$$\begin{aligned} f[k] &= (-1)^{k-1}(u[k] - \delta[k]) \\ &= -(-1)^k u[k] + \delta[k]. \end{aligned}$$

For $k \geq 0$,

$$u[k] = 1.$$

Hence,

$$f[k] = \delta[k] - (-1)^k.$$

$$\boxed{(b) \delta(k) - (-1)^k.}$$



DEBUG INFO

Chapter VI

Z Transform, DTFS and DTFT

Total Questions : 24

MCQ : 23

MSQ : 0

NAT : 1



PrepFusion