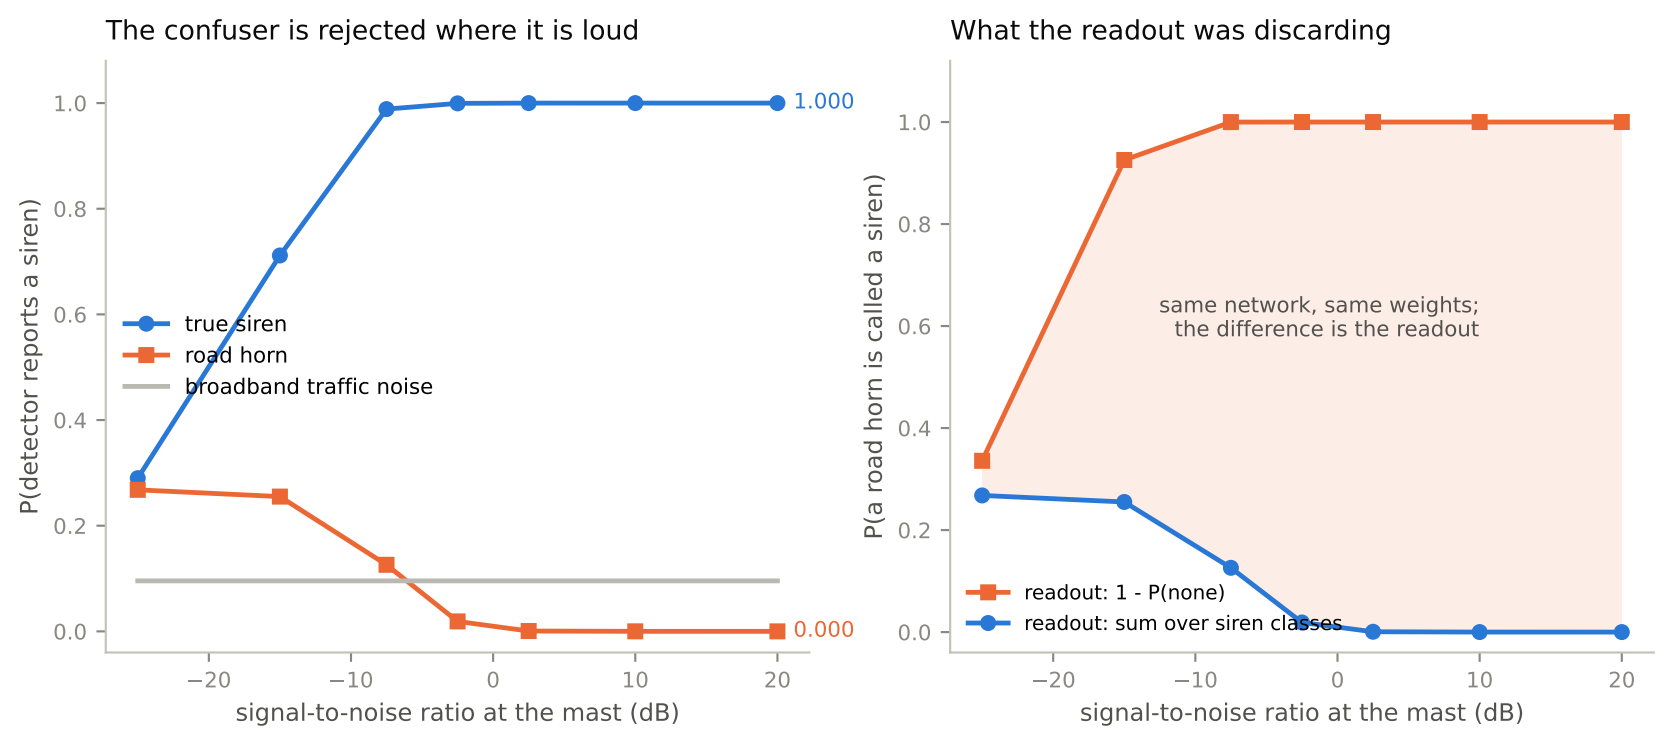
The confuser is rejected where it is loud
P(detector reports a siren)
1.0
0.8
0.6
0.4
0.2
0.0
true siren
road horn
broadband traffic noise
1.000
0.000
−20
−10
0
10
20
signal-to-noise ratio at the mast (dB)
What the readout was discarding
P(a road horn is called a siren)
same network, same weights;
the difference is the readout
readout: 1 - P(none)
readout: sum over siren classes
signal-to-noise ratio at the mast (dB)