


Segmento A

No.	z	y	x	a
0	0	0	0	1
1	0	0	1	0
2	0	1	0	1
3	0	1	1	0
4	1	0	0	0
5	1	0	1	1
6	1	1	0	1
7	1	1	1	1

$$z'x' + zx + yx'$$

$$F = x'(z' + y) + xz$$

z/yx	00	01	11	10
0	1	0	0	1
1	0	1	1	1

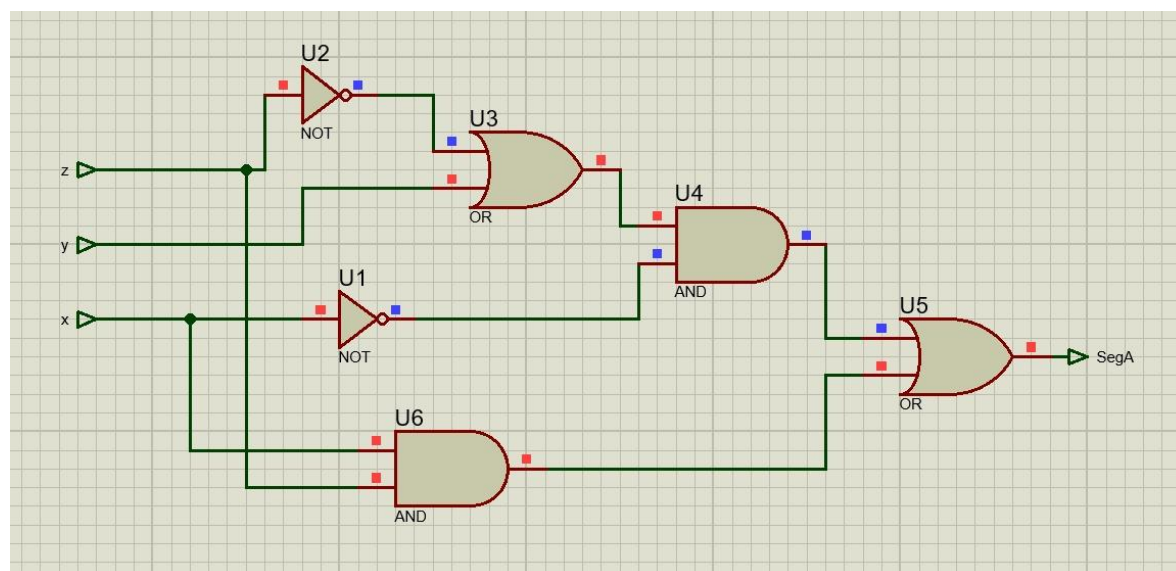


Segmento B

No.	z	y	x	b
0	0	0	0	1
1	0	0	1	0
2	0	1	0	0
3	0	1	1	1
4	1	0	0	0
5	1	0	1	1
6	1	1	0	1
7	1	1	1	1

$$z'y'x' + yx + zx + zy$$

z/yx	00	01	11	10
0	1	0	1	0
1	0	1	1	1

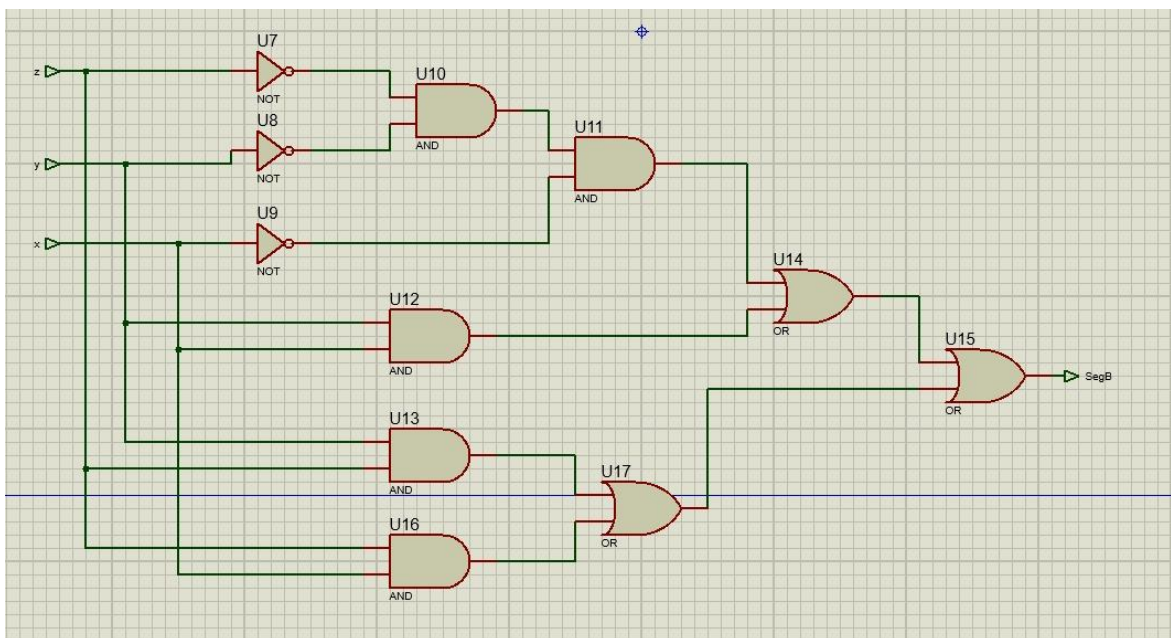


Segmento C

No.	z	y	x	c
0	0	0	0	1
1	0	0	1	1
2	0	1	0	1
3	0	1	1	1
4	1	0	0	0
5	1	0	1	1
6	1	1	0	1
7	1	1	1	0

$$f(z, y, x) = z' + y'x + yx'$$

z/yx	00	01	11	10
0	1	1	1	1
1	0	1	0	1

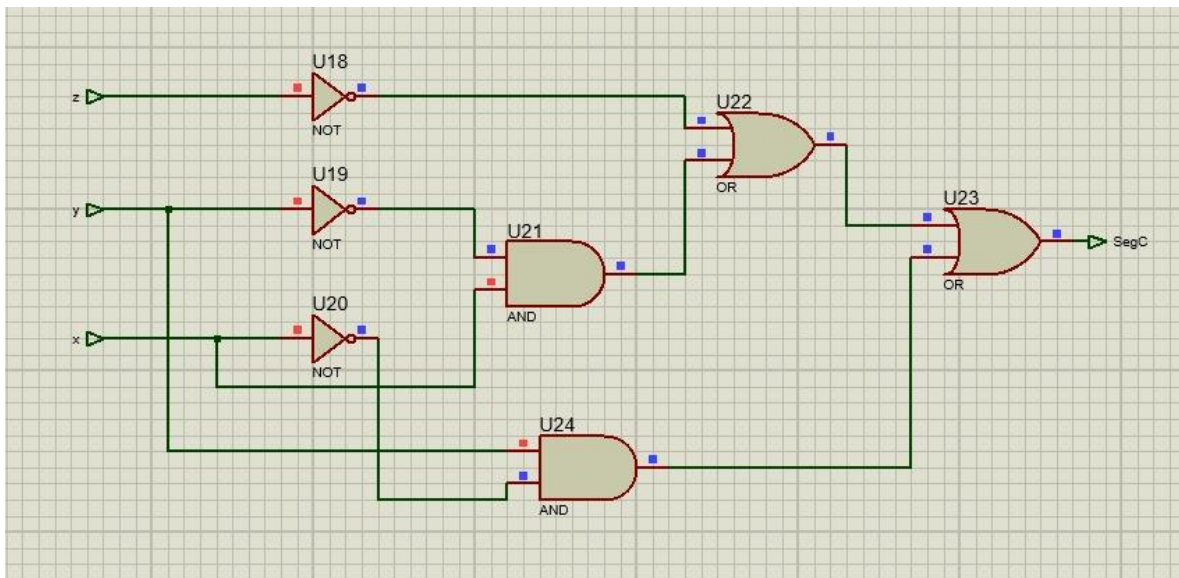


Segmento D

3					
4	No.	z	y	x	d
5	0	0	0	0	0
6	1	0	0	1	0
7	2	0	1	0	1
8	3	0	1	1	1
9	4	1	0	0	1
10	5	1	0	1	1
11	6	1	1	0	1
12	7	1	1	1	1

$$f(z, y, x) = y + z$$

z/yx	00	01	11	10
0	0	0	1	1
1	1	1	1	1

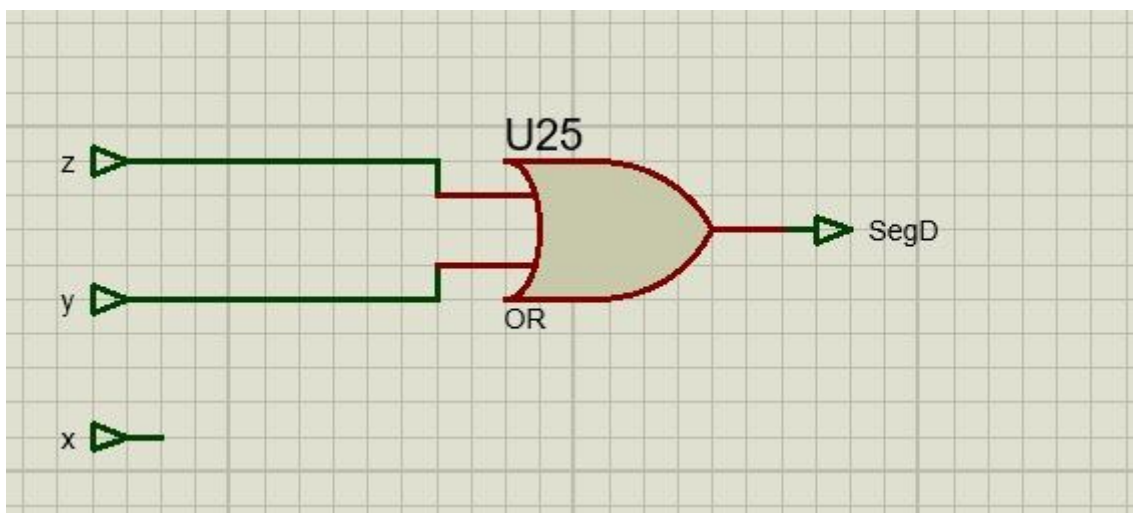


Segmento E

No.	z	y	x	e
0	0	0	0	1
1	0	0	1	1
2	0	1	0	1
3	0	1	1	1
4	1	0	0	1
5	1	0	1	1
6	1	1	0	1
7	1	1	1	1

$f(z, y, x) = 1$

z/yx	00	01	11	10
0	1	1	1	1
1	1	1	1	1

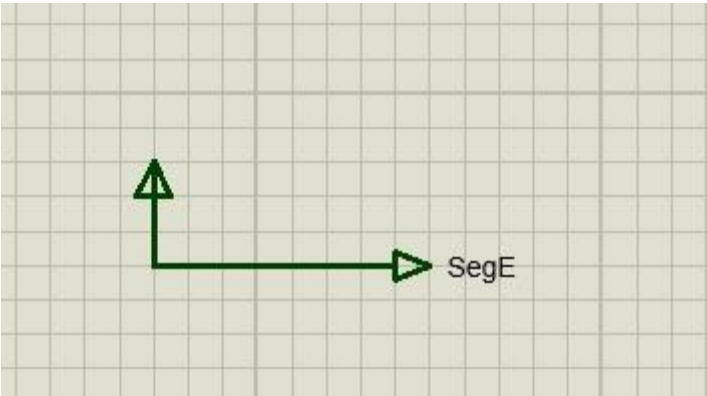


Segmento F

No.	z	y	x	f
0	0	0	0	1
1	0	0	1	0
2	0	1	0	1
3	0	1	1	1
4	1	0	0	1
5	1	0	1	1
6	1	1	0	1
7	1	1	1	0

$$f(z, y, x) = x' + z'y + zy'$$

z/yx	00	01	11	10
0	1	0	1	1
1	1	1	0	1

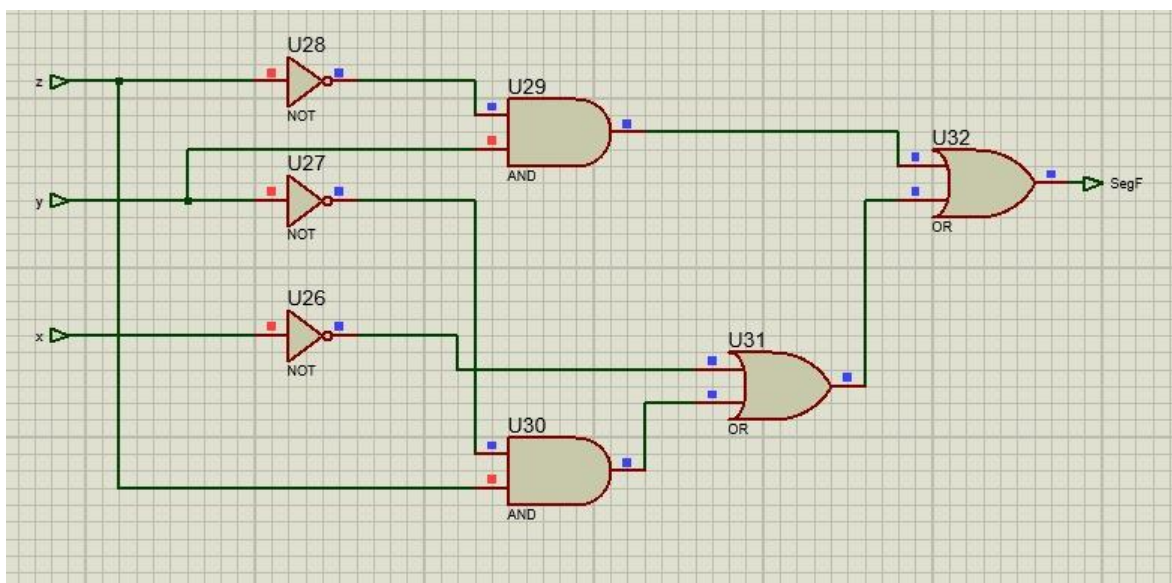

Segmento G

No.	z	y	x	g
0	0	0	0	1
1	0	0	1	1
2	0	1	0	1
3	0	1	1	0
4	1	0	0	0
5	1	0	1	0
6	1	1	0	0
7	1	1	1	1

$$f(z, y, x) = z'y' + z'x' + zyx$$

z/yx	00	01	11	10
0	1	1	0	1
1	0	0	1	0

