REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL ISSUE. REPLACES REV B SKETCHES	2026-11-10	

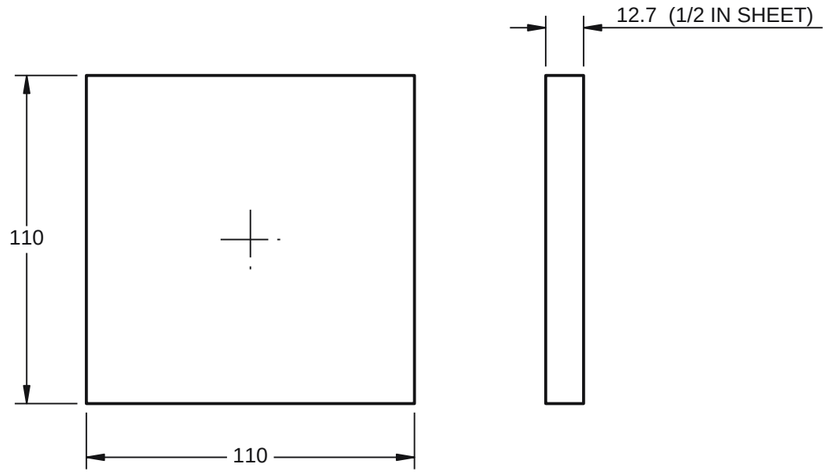

-1 ISOLATION PAD

SCALE 1:2. QTY 1

NOTES:

1. MATERIAL: RETICULATED (OPEN-CELL) POLYURETHANE FOAM, 30 PORES PER INCH. THE FOAM FACTORY FILTER FOAM OR EQUIVALENT. -1 FROM 1/2 IN SHEET, -2 FROM 1 IN SHEET.
2. CUT WITH A LONG SHARP BLADE. DO NOT COMPRESS THE FOAM WHILE CUTTING.
3. CUT THE POCKET IN -2 TO A LIGHT SLIP FIT OVER THE MEASURED CASE. Ø104 ASSUMES A Ø102 CASE, WHICH IS NOT VERIFIED.
4. THE POCKET IS BLIND. LEAVE AT LEAST 12 OF FOAM ABOVE THE MICROPHONE PORTS.
5. RELIEVE -1 LOCALLY OVER THE HEADS OF THE ASSEMBLY SCREWS IF THE CASE ROCKS (SLM-PAS-A01 NOTE 5).
6. FOAM IS PART OF THE ACOUSTIC PATH. REPEAT THE BEARING CALIBRATION (TEST HB-5) AFTER FITTING OR CHANGING -2.
7. PRELIMINARY. THESE PARTS HAVE NOT BEEN CUT OR FITTED.

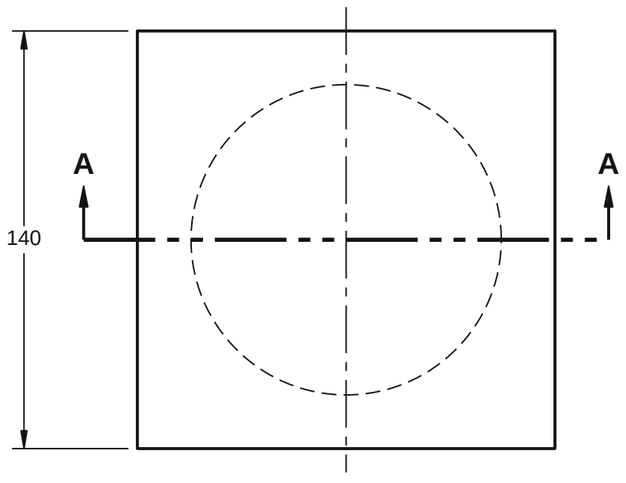

-2 WINDSCREEN CAP, TOP VIEW

SCALE 1:2. QTY 1

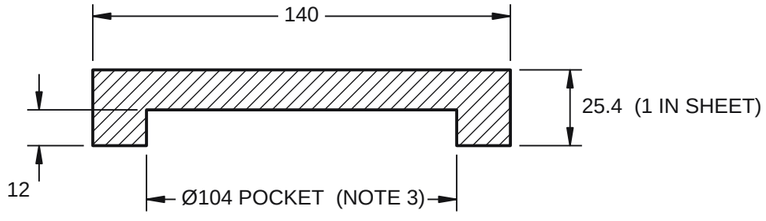

SECTION A-A

SCALE 1:2

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
LINEAR ±2
HAND-CUT FOAM PARTS
INTERPRET PER ASME Y14.5-2018

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN		2026-11-10
CHECKED		
APPROVED		

MATERIAL: RETICULATED POLYURETHANE FOAM, 30 PPI. SEE NOTE 1

FINISH: NONE

STATUS: **PRELIMINARY**

S&L MILESTONE SOLUTIONS

TITLE
FOAM PAD AND WINDSCREEN CAP
PASSIVE ACOUSTIC SENSOR NODE, SENSOR HEAD

SIZE	DWG NO	REV
B	SLM-PAS-M02	A

SCALE	PROJECT	SHEET
1:2	PAS NODE	1 OF 1