

Contents

1	class notes	2
1.1	Coulomb's Law	2
1.1.1	Examples	4
1.2	Electric flux and Field Lines	5
1.2.1	Field Lines	5
1.2.2	Flux	5
1.3	5: potential energy	6
1.7	Conductors and Capacitance	7
1.7.1	Conductors	7
1.7.2	Capacitance	9
2	disc	12
2.1	pset1	12
2.1.1	a	12
2.1.2	b	12
2.1.3	c	12
2.1.4	d	12
2.2		12
2.2.1		12
2.2.2		12
2.2.3		13
2.2.4		13
2.3	RL stuff lol	13
2.3.1		13
2.3.2		13
2.3.3		13
2.3.4		13
2.3.5		14
2.4		14
2.4.1		14
2.4.2		14
2.4.3		14
2.4.4		14
2.5	w2	15
2.5.1	q1	15
2.6	Equations	17
2.7	Constants	17

Chapter 1

class notes

1.1 Coulomb's Law


Coulomb's Law


$$\vec{F}_{12} = k \frac{q_1 q_2}{r_{12}^2} \hat{r}_{12} \quad (1.1)$$

Gives a force along the line of two charges.

If q_1 and q_2 have the same sign (i.e. charge) then the force must be repulsive. But if they have the *same* sign, then it must be attractive.

Because of Newton's second law, $F_{12} = -F_{21}$

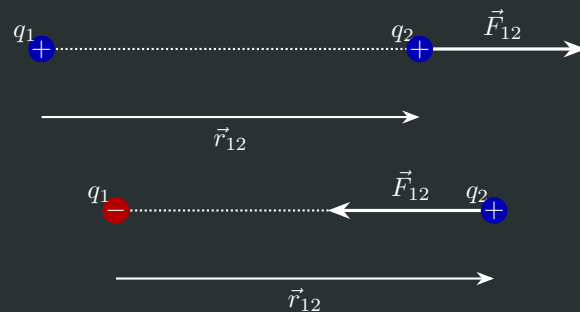

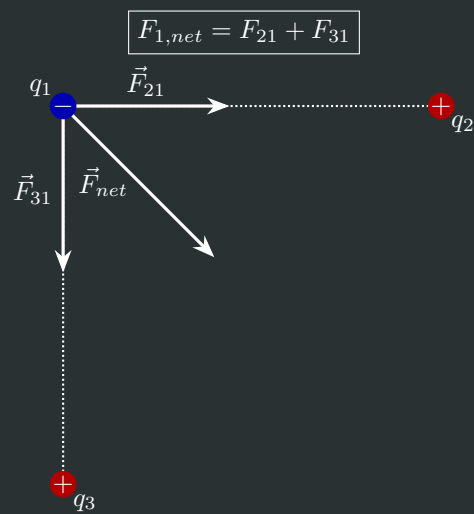

Superposition Principle

$$F_{net} = \sum_i \vec{F}_i \quad (1.2)$$

Electron Charge


$$e = -1.6 \times 10^{-19} C$$

k

$$k = 9 \times 10^9 \frac{NM^2}{C^2}$$

1.1.1 Examples

Example 1.1.1 $F_{3,net} = ???$

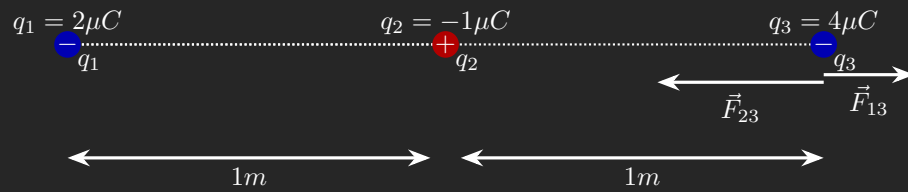

Using Coulomb's Law 1.1...

$$\vec{F}_{3,net} = \vec{F}_{31} + \vec{F}_{32}$$

$$\vec{F}_{31} = k \frac{q_3 q_1}{r_{31}^2} \hat{r}_{31}$$

$$\vec{F}_{32} = k \frac{q_3 q_2}{r_{32}^2} \hat{r}_{32}$$

$$k = 9 \times 10^9 \frac{NM^2}{C^2}, \quad q_1 = 2\mu C, \quad q_2 = -1\mu C, \quad q_3 = 4\mu C$$

$$\vec{F}_{31} = 1.800 \times 10^{-2} \text{ N}, \quad \vec{F}_{32} = -3.600 \times 10^{-2} \text{ N}$$

$$\vec{F}_{3,net} = -1.800 \times 10^{-2} \text{ N}$$

1.2 Electric flux and Field Lines

1.2.1 Field Lines

- Measure of electric field lines over an area

Electric Field

$$E = k \frac{q}{r^2} \quad (1.3)$$

Measure of the energy in an electric field at a point

Density of Field Lines

$$D = \frac{N}{4\pi r^2} \quad (1.4)$$

used when plotting

Number of Graphed Field Lines

$$N \equiv \frac{q}{\epsilon_0}, \quad E = \frac{N}{A} \quad (1.5)$$

1.2.2 Flux

Number of field lines passing through a surface

$$\Phi \propto N$$

For a point charge aligned at the center of a sphere it can just be defined as

$$\Phi \equiv EA$$

To calculate total over surface ...

$$\Phi \equiv \int_s \vec{E} d\vec{A}$$

1.3 5: potential energy

Change in potential in const $\mathbf{E}$ field

$$\Delta U = q\vec{E}\ell \quad (1.6)$$

Change in potential in non static field

$$\Delta U = Q \int_a^b \vec{E}dr \quad (1.7)$$


1.7 Conductors and Capacitance

1.7.1 Conductors

- Every point in a conductor is at equipotential, this is because the electric field at any point is zero.
- Continuing with Gauss's law, no matter the location of a charge contained *inside* a shell (but not overlapping the shell itself), the outside of the shell will have the same charge distribution, however the inside may not.
- When looking at the inverse, (a particle placed *outside* of a conductor), we find that the charges move to the surface to cancel out the exerted field, meaning that the inside of the object will have a net charge of 0.
- Importantly, this still applies when a cavity is made *within the conductor*
- This allows for the shielding of an object if it is placed within a conductor ¹

¹Think Faraday cage (maybe)

Example 1.7.1 Equipotential difference in two Spheres

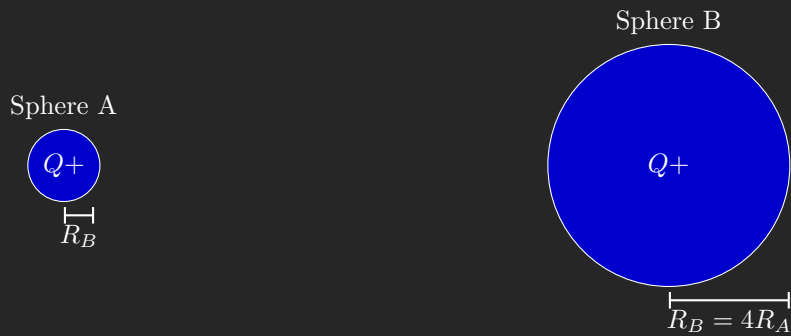

$$V_A = - \int_{\infty}^{R_A} \vec{E}_A \cdot d\vec{l}, \quad V_B = - \int_{\infty}^{R_B} \vec{E}_B \cdot d\vec{l}$$

Given a point charge ...

$$\vec{E} = k \frac{Q}{r^2} \rightarrow - \int_{\infty}^r k \frac{Q}{r^2} = k \frac{Q}{r} \rightarrow$$

For a point charge...

$$V = k \frac{Q}{r}$$

$$V_A = k \frac{Q}{R_A}, \quad V_B = k \frac{Q}{4R_B}$$

$$4 \times V_A = V_B$$

Once connected, become a single conductor which wishes to reach equipotential. To find final charges ...

$$V_A = V_B \Rightarrow k \frac{Q_A}{R_A} = k \frac{Q_B}{R_B}$$

$$k \frac{Q_A}{R_A} = k \frac{Q_B}{4R_A}$$

$$4Q_A = Q_B$$

1.7.2 Capacitance


Capacitance

$$C \equiv \frac{Q}{\Delta V} \quad (1.8)$$

Units of Farads, or Coulombs per volt

- Measure of field between to oppositely charged objects
- Ex. A plate of Q and $-Q$ placed a distance d away from one another
- Stores the energy *in* the magnetic field induced between said objects

Example 1.7.2 Capacitance between two plates

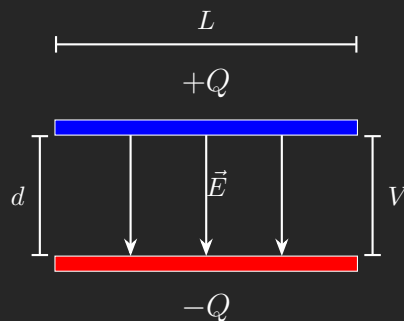

$$d \ll L$$

To calculate E field between plates ...

$$E_{bot} = \frac{1}{2} \frac{\sigma}{\epsilon_0}, \quad E_{top} = \frac{1}{2} \frac{\sigma}{\epsilon_0}$$

$$\sigma = \frac{Q}{A}$$

$$E_{bot} = \frac{1}{2} \frac{Q}{\epsilon_0 A}, \quad E_{top} = \frac{1}{2} \frac{Q}{\epsilon_0 A}$$

Since field lines are the same direction...

$$E_{tot} = \frac{Q}{\epsilon_0 A}$$

To find capacitance...

$$C \equiv \frac{Q}{\Delta V}$$

$$|\Delta V| = \int_{bot}^{top} \vec{E} \cdot d\vec{l} \Rightarrow \Delta V = \frac{Q}{\epsilon_0 A} \int_{bot}^{top} dl$$


$$\Delta V = \frac{Q}{\epsilon_0 A} d$$

$$C = \frac{\epsilon_0 A}{d}$$

Capacitance for Parallel Plates

$$C = \frac{\epsilon_0 A}{d} \quad (1.9)$$

Example 1.7.3 Parallel Plate Capacitor

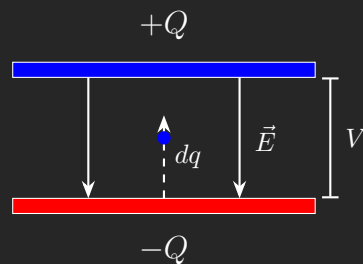

To calculate the work needed to move a particle from the bottom plate to the top plate

$$dW = dqEd$$

Since we know that the energy from the electric field is equal to $\frac{V}{d} \dots$

$$dW = dq \frac{V}{d} d$$

$$dU = Vdq$$

This holds true for *any system*. Note that dU is *not* constant because for each particle moved, it becomes requires more work for the next.

To calculate potential of a capacitor. . .

$$U = \int_0^Q V dq \Rightarrow U = \int_0^Q \frac{q}{C} dq$$

Thus . . .

$$U = \frac{1}{2} \frac{Q^2}{C}$$

Potential of a Capacitor

$$U = \frac{1}{2} \frac{Q^2}{C} \quad U = \frac{1}{2} CV^2 \quad U = \frac{1}{2} QV \quad (1.10)$$

Energy density of a capacitor

$$u = \frac{1}{2} \epsilon_0 E^2 \quad (1.11)$$

Chapter 2

disc

2.1 pset1

2.1.1 a

It is possible that the third option c could be true. This is because we see an exponential acceleration in the Y direction, which correlates with W^2

2.1.2 b

$$a = F \quad t = \frac{L}{V_0} \rightarrow y_f = \frac{1}{2} \frac{FL^2}{V_0}$$

2.1.3 c

$$\frac{w}{2} = \frac{1}{2} \frac{F_{max} L^2}{mv_0^2} \quad F_{max} = \frac{mv_0^2 w}{L^2}$$

2.1.4 d

$$\tan(\theta) = \frac{v_y}{v_o} = \frac{w}{l}$$
$$v_y = \frac{F}{m} \times \frac{L}{v_0}$$

2.2

2.2.1

It has a net force of 0. This is because the x and y components cancel each other out.

2.2.2

The y component would cancel, as it is symmetric around the particle. X would not form a triangle to find r to use $u_g = \frac{-Gm_1m_2}{r^2}$

$$F_g = -\frac{GMm}{\left(\frac{\sqrt{5}a}{2}\right)^2}$$

$$F_{g,x} = -\frac{16Mm}{g\sqrt{5}a^2}$$

2.2.3

2.2.4

The physical argument is that the object is quite far away, and thus we can use a small angle aprox.

$$\sqrt{(x - a/2)^2 + (a/2)^2} \rightarrow \approx x$$

$$\frac{GMm}{x^2}$$

2.3 RL stuff lol

it is the fourth one

2.3.1

$$u_c = -\frac{4\sqrt{2}GMm}{a}$$

2.3.2

$$\Delta u = \frac{4\sqrt{2}GMm}{a} = \frac{1}{2}mv^2$$

$$v = \sqrt{\frac{8\sqrt{2}GM}{a}}$$

2.3.3

$$u_1, u_2 = -\frac{2GMm}{a}$$

$$u_3, u_4 = \frac{-2GMm}{\sqrt{5}a}$$

$$u = u_1 + u_2 \cdots = -\frac{4GMm}{a}\left(1 + \frac{1}{\sqrt{5}} = Ur\right)$$

2.3.4

no, the middle has *higher* potential energy

2.3.5

2.4

2.4.1

$$p^2 = \frac{4a^3\pi^2}{GM}$$

2.4.2

$$\omega = 2\pi/p \rightarrow \omega^2 = \frac{4\pi^2 GM}{\cancel{4a^3\pi^2}} = \frac{GM}{r^3}$$

2.4.3


$$\begin{aligned} Dw^a R6a + b \\ a = \frac{D}{m} w^a R^{a+b} = \omega^2 R \\ \omega^{2-a} = \frac{D}{m} R^{a+b-1} \end{aligned}$$

2.4.4

2.5 w2

2.5.1 q1

Example 2.5.1 The configuration below shows some points around a positive charge Q . If a positive test charge q is placed at point A, at a distance r_A from Q , calculate the magnitude of the force between the charges in terms the given variables.

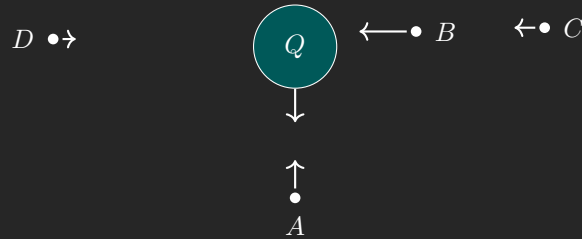

P1) Find magnitude

Because we're finding a charge diff, we use 1.1

$$\vec{F}_{12} = k \frac{Qq}{r_A^2}$$

P2) Force strength

Based on distance to the *field* of Q

$$F_B > F_A > F_C > F_D$$

P4) Electric Field Mag


Because a test charge placed in a field exerts doesn't have any force of its own, we use a modified version of 1.3

$$E = k \frac{Q}{r_a^2}$$

Based on above...

$$2Q \propto 2E, \quad 2q \propto 2E$$

Example 2.5.2 Electric Field Due to Point Charges Four point charges $2q$, q , q , and q are placed at the corners of a rectangle of dimensions a and $3a$ as shown in the figure. A fifth charge Q is placed at the center of the rectangle. Our task is to compute the electric field at the center of the rectangle, and then determine the force on Q .

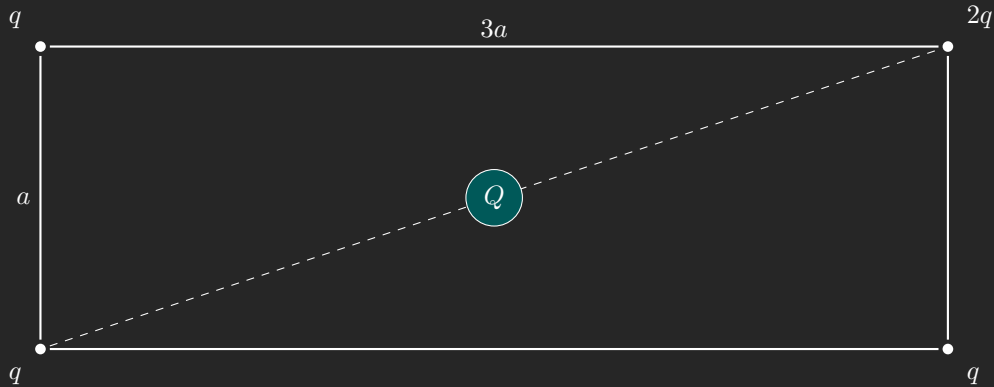

P1) Find the mag of field charges

$$r = \sqrt{\left(\frac{3a}{2}\right)^2 + \frac{1}{(2a)^2}}$$

$$r = \sqrt{\frac{9a^2}{4} + \frac{1}{4a^2}}$$

$$r = \sqrt{\left(\frac{10a^2}{4}\right)}$$

$$r = \frac{\sqrt{5}}{\sqrt{2}}a$$

$$q = E_1 = \frac{2ka}{5a^2}, \quad 2q = E_2 = \frac{4ka}{5a^2}$$

P3) Find X and Y components

2.6 Equations

$$\vec{F}_{12} = k \frac{q_1 q_2}{r_{12}^2} \hat{r}_{12} \quad (1.1) \text{ (Coulomb's Law)}$$

$$F_{net} = \sum_i \vec{F}_i \quad (1.2) \text{ (Superposition Principle)}$$

$$E = k \frac{q}{r^2} \quad (1.3) \text{ (Electric Field)}$$

$$D = \frac{N}{4\pi r^2} \quad (1.4) \text{ (Density of Field Lines)}$$

$$N \equiv \frac{q}{\epsilon_0}, \quad E = \frac{N}{A} \quad (1.5) \text{ (Number of Graphed Field Lines)}$$

$$\Delta U = q \vec{E} \ell \quad (1.6) \text{ (Change in potential in const E field)}$$

$$\Delta U = Q \int_a^b \vec{E} dr \quad (1.7) \text{ (Change in potential in non static field)}$$

$$C \equiv \frac{Q}{\Delta V} \quad (1.8) \text{ (Capacitance)}$$

$$C = \frac{\epsilon_0 A}{d} \quad (1.9) \text{ (Capacitance for Parallel Plates)}$$

$$U = \frac{1}{2} \frac{Q^2}{C} \quad U = \frac{1}{2} C V^2 \quad U = \frac{1}{2} Q V \quad (1.10) \text{ (Potential of a Capacitor)}$$

$$u = \frac{1}{2} \epsilon_0 E^2 \quad (1.11) \text{ (Energy density of a capacitor)}$$

2.7 Constants

$$e = -1.6 \times 10^{-19} C \quad (1) \text{ (Electron Charge)}$$

$$k = 9 \times 10^9 \frac{NM^2}{C^2} \quad (2) \text{ (k)}$$