



Receiving module, which receives the signal from the other ESP 32 Microcontroller for inputs.


Glued and Soldered onto the chassis for stability and to tighten connections.

A

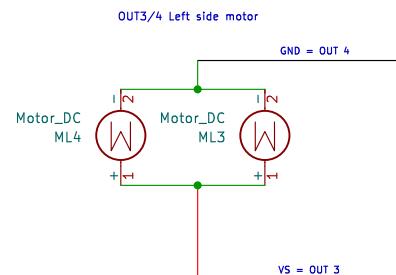

Connections are demonstrated with the '='

For example Pin 1 = GND is used for simplicity and easier demonstration.

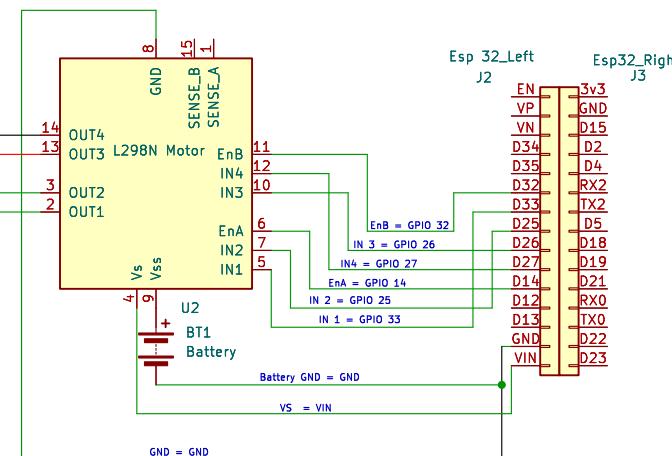

B

A

C

B

D

C

Abdalrahman Zbeidi

Sheet: /
File: ESP32_RC_Schem.kicad_sch

Title: ESP32 RC Reciever Module

Size: A4 Date:

KiCad E.D.A. 9.0.2

Rev:
Id: 1/1