
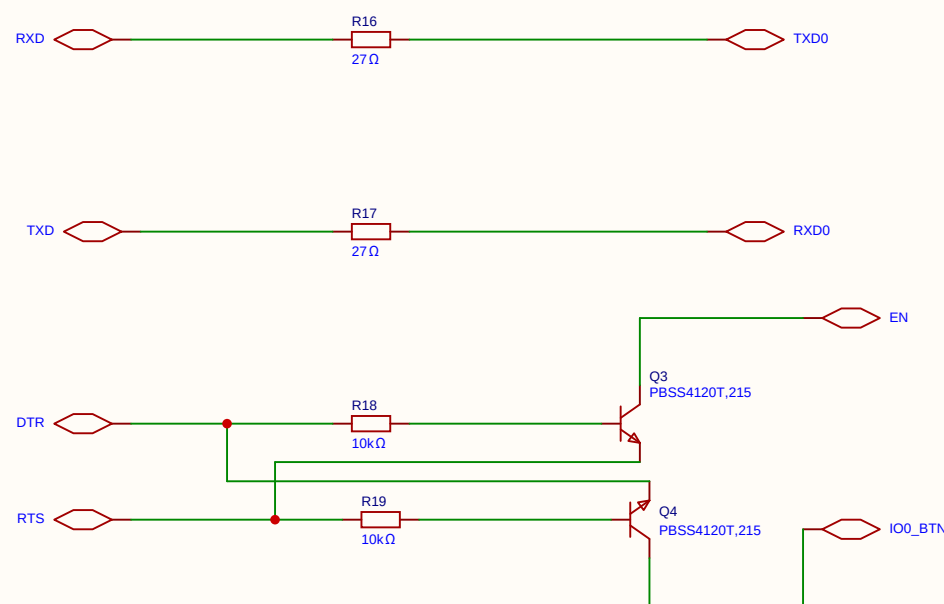
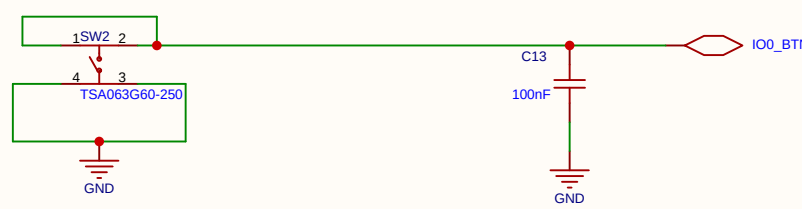
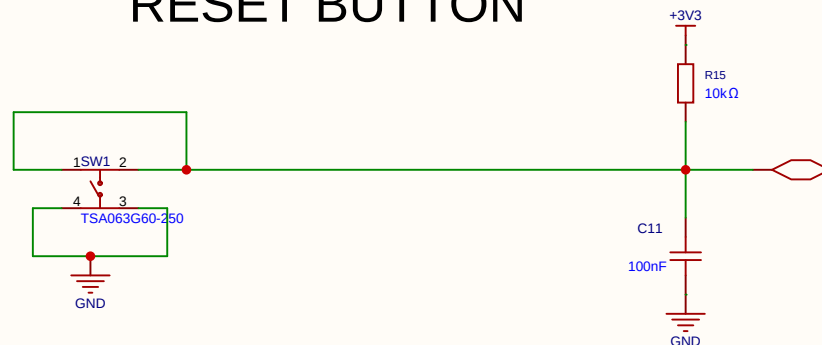
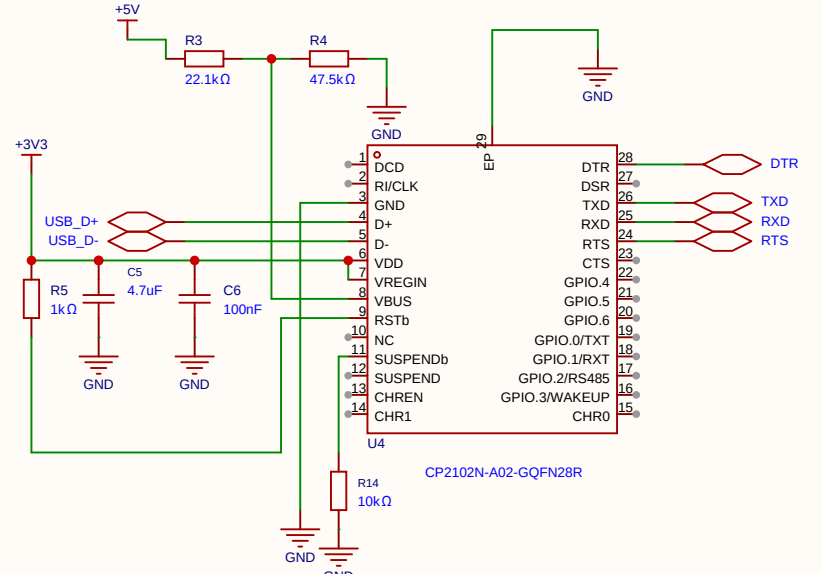
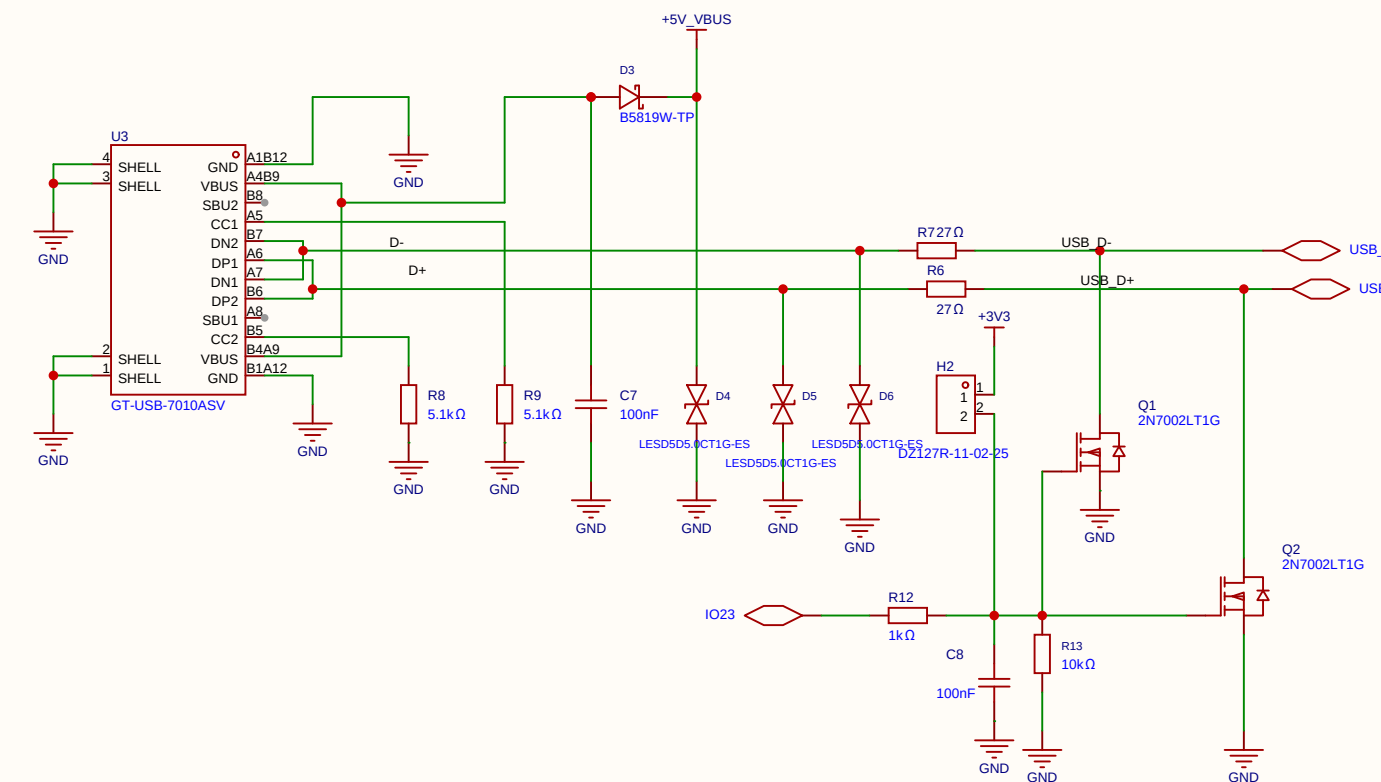
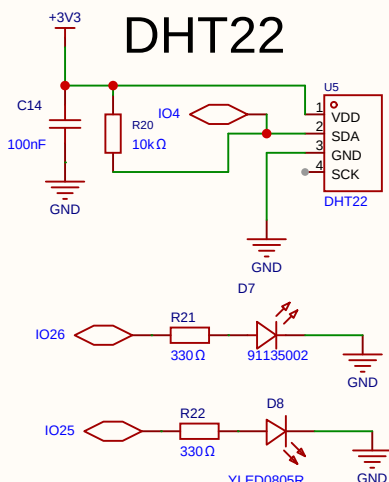
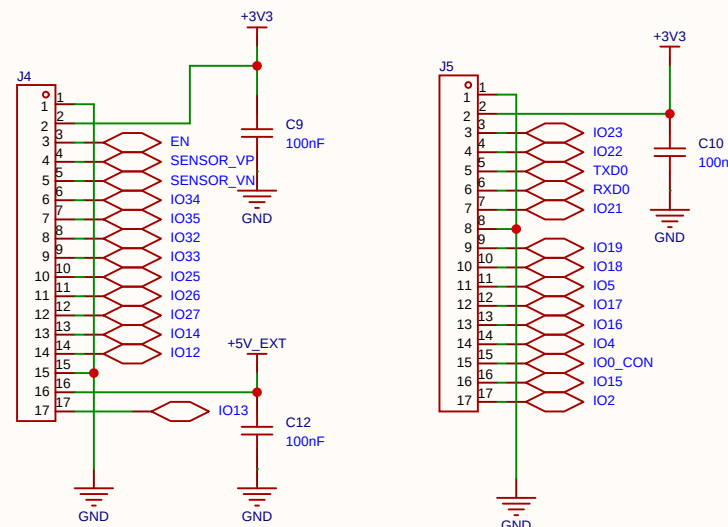
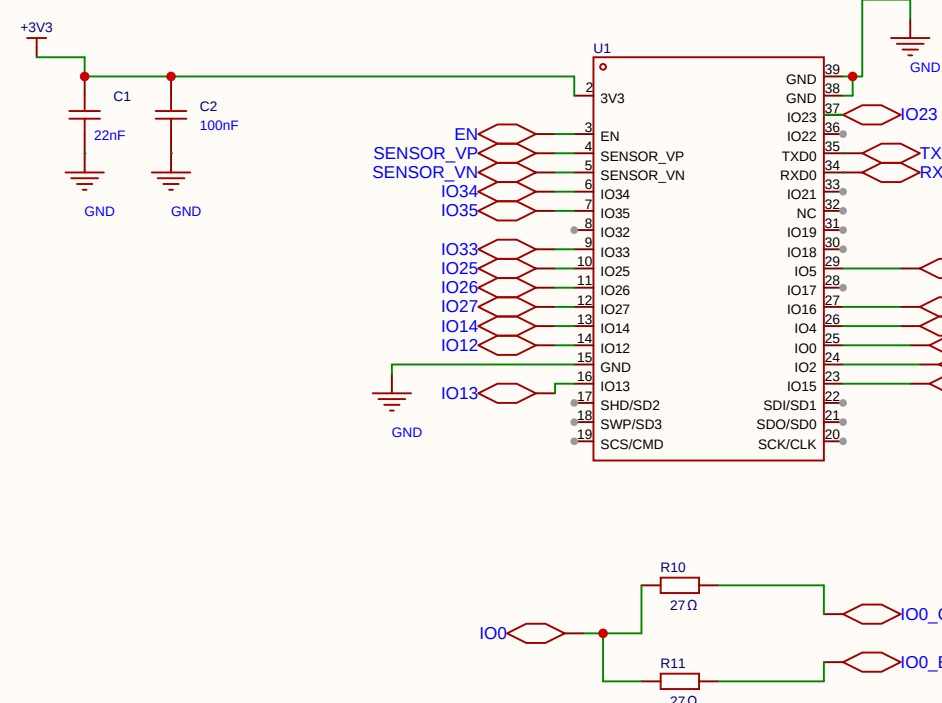





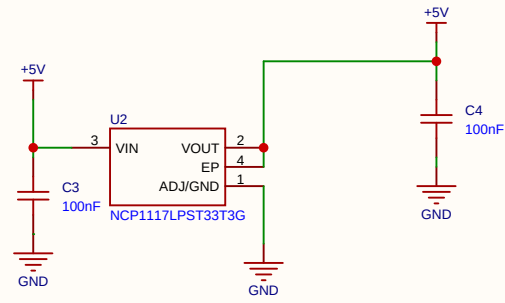

WORK DONE BY:
Malcolm John - 192224
Ahmed Asad - 171883
Success Ajala - 189611
Pritpal Kaur - 169965
Terry Terer - 187516

No.	Type	Quantity	Comment	Designator	Footprint	Value	Manufacturer Part	Manufacturer	Supplier Part	Supplier
1	Capacitor	1	22nF	C1	C0402	22nF	CL05B223KASNNNC	SAMSUNG(三星)	LC38578	LCSC
2	Capacitor	12	100nF	C2	C3.C4.C6.C7.C8.C9.C10.C11.C12.C13.C14	100nF				
3	Capacitor	4	4.7uF	C5	C0603	4.7uF	CL05A475KPNRNC	SAMSUNG(三星)	C368809	LCSC
4	LED (power/spot)	2	18-21LMC-FM1N2B/3T	D1	LED0603-RD_GREEN		18-21LMC-FM1N2B/3T	EVERLIGHT(亿光)	C33889	LCSC
5	Schottky diode	1	B8819W-1P	D3	SOD-123 12.8-WLB-SL3.7-RD		B8819W-1P	MCC(美光)	C84354	LCSC
6	ESD protection diode	3	LES05D5.0CT1G-ES	D4,D5,D6	SOD-523_1.1-2*W0.8-L51.6-BI		LES05D5.0CT1G-ES	Elecsuper(静芯)	C5199159	LCSC
7	LED, 5 mm TH	1	91135002	D7	LED-TH_BD5.0-P2.54-FD		91135002	深宏电子	C5907196	LCSC
8	LED, 0805 SMD	1	YLED0805R	D8	LED0805-R_RD_RED		YLED0805R	YONGYUTAI(永裕泰)	C19171391	LCSC
9	Pin header, 2-pin	1	D2127R-11-02-25	H2	HDR-TH_2P-P1.27-V-M		D2127R-11-02-25	DEALON(德之隆)	C2935942	LCSC
10	Pin header, 12-pin	1	P-210S12LP-A110	J1	HDR-TH_12P-P1.27-V-M		P-210S030P-A110	Cimmer(奇摩)	C124316	LCSC
11	Pin header	2	XBS11WV-02H-C30D60	J4,J5	FFC-SMD_2P-P1.00_1.0-24A-PW		XBS11WV-02H-C30D60	XKB Connectivity(中国星坤)	C706874	LCSC
12	N-channel MOSFET	2	2N7002LT1G	Q1,Q2	SOT-23_L2.9-W1.3-P1.90-L52.4-BR		2N7002LT1G	onsemi(安森美)	C16338	LCSC
13	NPN transistor	2	PBSS4120T.215	Q3,Q4	SOT-23-3_L2.9-W1.3-P1.90-L52.4-BR		PBSS4120T.215	Nexperia(安世)	C455069	LCSC
14	Resistor	1	5.1kΩ	R1	R0805	5.1kΩ	RC0805JR-075K1L	YAGEO(国巨)	C105874	LCSC
15	Resistor	1	560Ω	R2	R0402	560Ω	RC0402FR-07550RL	YAGEO(国巨)	C163480	LCSC
16	Resistor	1	22.1kΩ	R3	R0402	22.1kΩ	RC0402FR-07221K1L	YAGEO(国巨)	C163478	LCSC
17	Resistor	1	47.5kΩ	R4	R0402	47.5kΩ	RC0402FR-07475K1L	YAGEO(国巨)	C137974	LCSC
18	Resistor	2	1kΩ	R5,R12	R0402	1kΩ	RC0402JR-071K1L	YAGEO(国巨)	C105637	LCSC
19	Resistor	4	27Ω	R6,R7,R10,R11	R0402	27Ω	RC0402FR-0727R1L	YAGEO(国巨)	C138021	LCSC
20	Resistor	2	5.1kΩ	R8,R9	R0402	5.1kΩ	RC0402JR-075K1L	YAGEO(国巨)	C105873	LCSC
21	Resistor	4	10kΩ	R13,R14,R15,R20	R0402	10kΩ	RC0402JR-0710K1L	YAGEO(国巨)	C30489	LCSC
22	Resistor	2	27Ω	R16,R17	R0402	27Ω	RC0402JR-0727R1L	YAGEO(国巨)	C137980	LCSC
23	Resistor	2	10kΩ	R18,R19	R0402	10kΩ	RC0402FR-0710K1L	YAGEO(国巨)	C06490	LCSC
24	Resistor	2	330Ω	R21,R22	R0402	330Ω	RC0402FR-07330RL	YAGEO(国巨)	C105875	LCSC
25	Tactile switch	2	TSA063G60-250	SW1,SW2	KEY-SMD_4P-L6.1-W6.1-P4-S0-L59.0		TSA063G60-250	BRIGITE(博瑞泰)	C294566	LCSC
26	ESP32 module	1	ESP32-WROOM-32	U1	WIFI-M-SMD_39P-L25.5-W18.0-P1.27		ESP32-WROOM-32	ESPRESSIF(乐鑫)	C82899	LCSC
27	3.3V LDO regulator	1	NCP1117P133T3G	U2	SOT-223_L4.5-W3.3-P1.30-L57.0-BR		NCP1117P133T3G	onsemi(安森美)	C146799	LCSC
28	USB-C receptacle	1	GT-USB-C-7010ASV	U3	GT-USB-C-7010ASV		GT-USB-7010ASV	G-Switch(品胜)	C2988369	LCSC
29	USB-UART bridge IC	1	CP2102N-A02-G0FN28R	U4	QFN-28_L5.0-W5.0-P0.50-LT-EP3.3		CP2102N-A02-G0FN28R	SKYWORKS(矽成) LABCOS(芯科)	C964532	LCSC
30	Temp/humidity sensor	1	DHT22	U5	SENSOR-TH_HAIGU_DHT22		DHT22	HAIGU(广州海谷)	C2880291	LCSC

Schematic	Schematic1			Create at	2026-09-10
Board	Board1			Update at	2026-10-05
Drawn	Group 2				
Reviewed					
		Version	Size	Page	1 Total 1
 EasyEDA		V1.0	A4	EasyEDA.com	