

Switching Regulator Series

Step-Down DC/DC Converter BD9E303EFJ Evaluation Board

BD9E303EFJ-EVK-001

Description

BD9E303EFJ-EVK-001 Evaluation board delivers an output 5.0 volts from an input 7.0 to 36 volts using BD9E303EFJ, a synchronous rectification step-down DC/DC converter integrated circuit, with output current rating of maximum 3A. The output voltage can be set by changing the external parts of circuit and the loop-response characteristics also can be adjusted by the phase compensation circuit.

Performance specification (These are representative values, and it is not a guaranteed against the characteristics.)

 $V_{IN} = 24V$, $V_{OUT} = 5.0V$, Unless otherwise specified.

Parameter	Min	Typ	Max	Units	Conditions
Input Voltage Range	7.0		36	V	
Output Voltage		5.0		V	R1=30k Ω , R2=7.5k Ω
Output Voltage Setting Range	$V_{IN} \times 0.06$ ^(NOTE1)		$V_{IN} \times 0.8$	V	
Output Current Range	0		3	A	
Loop Band Width		18.2		kHz	
Phase Margin		70.8		degrees	
Input Ripple Voltage		300		mVpp	$I_O = 3A$
Output Ripple Voltage		30		mVpp	$I_O = 3A$
Output Rising Time		2.2		ms	
Operating Frequency		300		kHz	
Maximum Efficiency		91.1		%	$I_O = 1.2A$

(NOTE1) However, $(V_{IN} \times 0.06) \geq 1.0V$

Operation Procedures

1. Necessary equipments

- (1) DC power-supply of 7.0V to 36V/3A
- (2) Maximum 3A load
- (3) DC voltmeter

2. Connecting the equipments

- (1) DC power-supply presets to 24V and then the power output turns off.
- (2) The max. load should be set at 3A and over it will be disabled.
- (3) Check Jumper pin of SW1 is short, between intermediate-terminal and OFF-side terminal.
- (4) Connect positive-terminal of power-supply to VIN+terminal and negative-terminal to GND-terminal with a pair of wires.
- (5) Connect load's positive-terminal to VOUT+terminal and negative-terminal to GND-terminal with a pair of wires.
- (6) Connect positive-terminal of DC voltmeter 1 to TP1 and negative-terminal to TP2 for input-voltage measurement.
- (7) Connect positive-terminal of DC voltmeter 2 to TP3 and negative-terminal to TP4 for output-voltage measurement.
- (8) DC power-supply output is turned ON.
- (9) IC is enable (EN) by shorting Jumper-pin of SW1 between intermediate-terminal and ON-side terminal.
- (10) Check DC voltmeter 2 displays 5.0V.
- (11) The load is enabled.
- (12) Check at DC voltmeter 1 whether the voltage-drop (loss) is not caused by the wire's resistance.

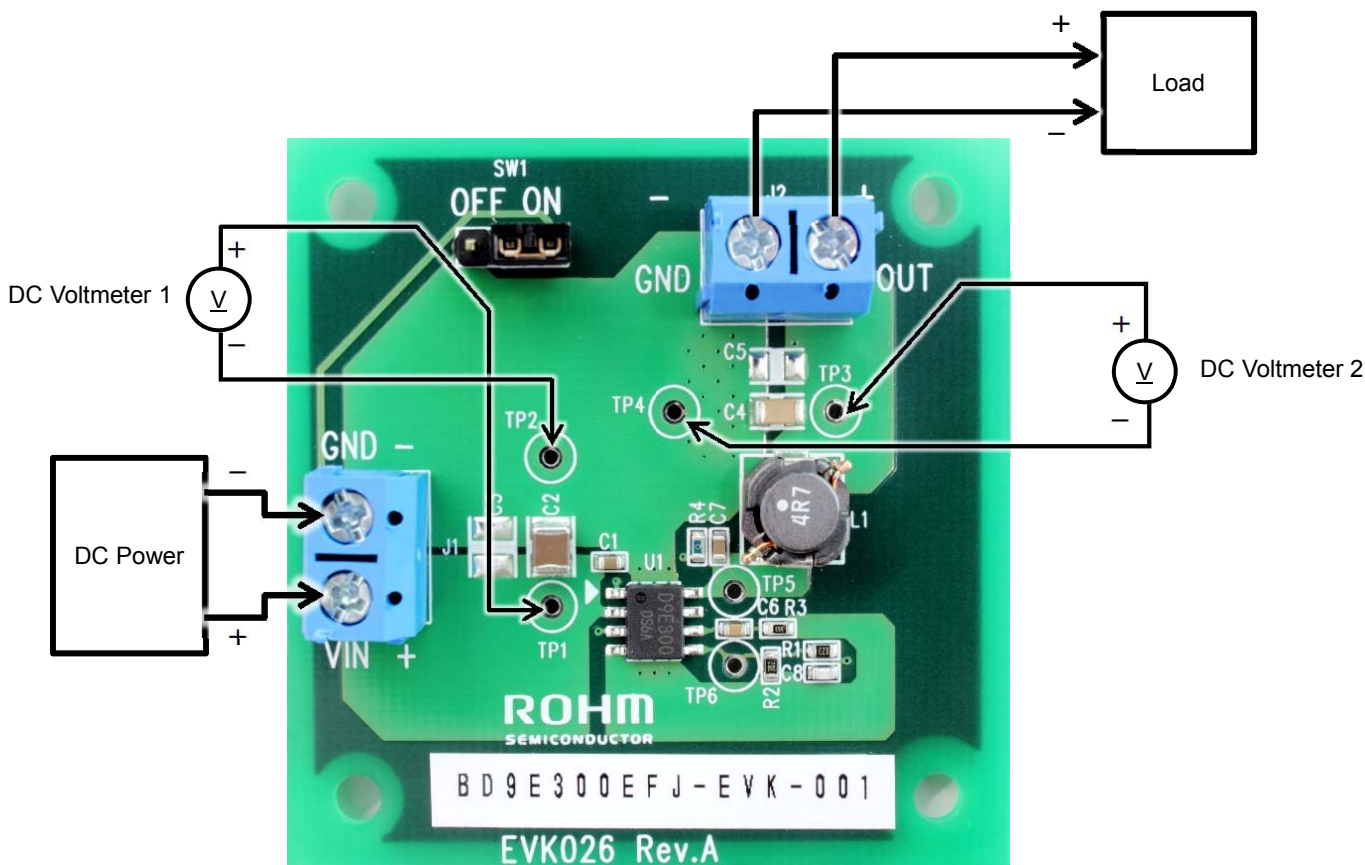


Figure 1. Connection Diagram

Enable-Pin

To minimize current consumption during standby-mode and normal operation, Enable-mode can be switched by controlling EN pin (3pin) of the IC. Standby-mode is enabled by shorting Jumper-pin of SW1 between intermediate-terminal and OFF-side terminal and normal-mode operation by shorting between intermediate-terminal and ON-side terminal.

It also can be switched between standby-mode and normal-mode operation by removing Jumper-pin and controlling the voltage between EN and GND-terminal. Standby-mode is enabled when the voltage of EN is under 0.8V, and normal-mode operation when it is over 2.5V.

Circuit Diagram

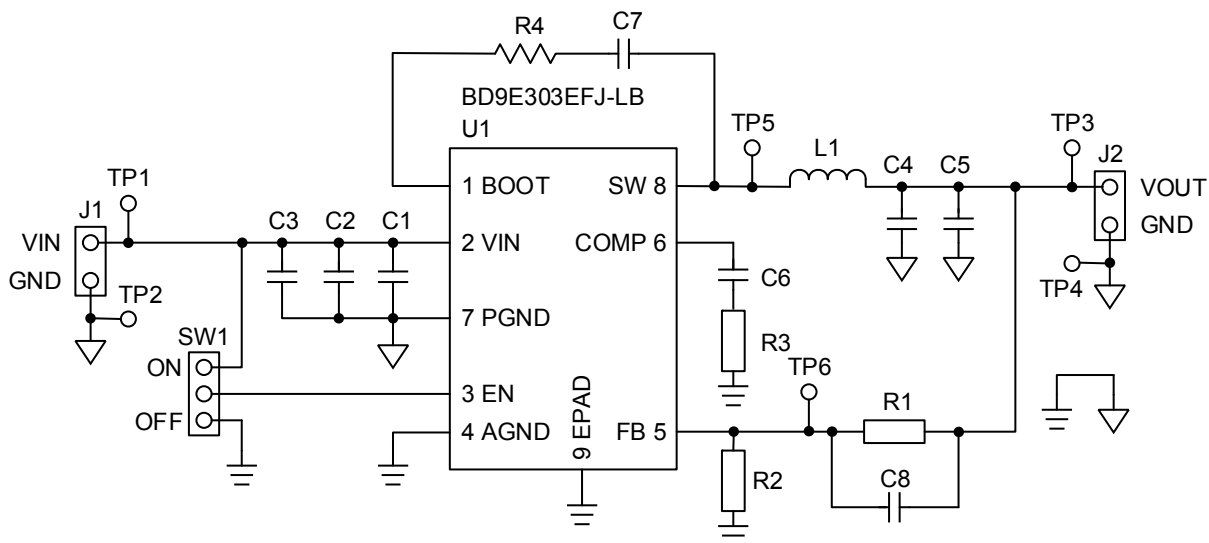
 $V_{IN} = 7.0V \text{ to } 36V, V_{OUT} = 5.0V$ 

Figure 2. BD9E303EFJ-EVK-001 Circuit Diagram

Bill of Materials

Count	Reference Designator	Type	Value	Description	Manufacturer Part Number	Manufacturer	Configuration (mm)
2	C1, C7	Ceramic Capacitor	0.1μF	50V, B, ±20%	GRM188B31H104MA92	MURATA	1608
1	C2	Ceramic Capacitor	10μF	50V, B, ±10%	GRM32EB31H106KA12	MURATA	3225
0	C3	Ceramic Capacitor	-	Not installed	-	-	3225
2	C4, C5	Ceramic Capacitor	22μF	10V, B, ±10%	GRM31CB31A226KE19	MURATA	3216
1	C6	Ceramic Capacitor	6800pF	50V, B, ±10%	GRM188B11H682KA01	MURATA	1608
1	C8	Ceramic Capacitor	-	Not installed	-	-	1608
1	L1	Inductor	10μH	±20%, DCR=24mΩmax, 4.49A	NS10155T100MNV	TAIYO YUDEN	101101
1	R1	Resistor	30kΩ	1/10W, 50V, 1%	MCR03ERPF3002	ROHM	1608
1	R2	Resistor	7.5kΩ	1/10W, 50V, 1%	MCR03ERPF7501	ROHM	1608
1	R3	Resistor	15kΩ	1/10W, 50V, 1%	MCR03ERPF1502	ROHM	1608
1	R4	Resistor	0Ω	Jumper	MCR03ERPJ000	ROHM	1608
1	SW1	Pin header	-	2.54mm × 3 contacts	XG8S-0331	OMRON	-
1	U1	IC	-	Buck DC/DC Converter	BD9E303EFJ-LB	ROHM	HTSOP-J8
2	J1, J2	Terminal Block	-	2 contacts, 15A, 14 to 22AWG	TB111-2-2-U-1-1	Alphaplus Connectors & Cables	-
1	-	Jumper	-	Jumper pin for SW1	XJ8A-0211	OMRON	-

Layout

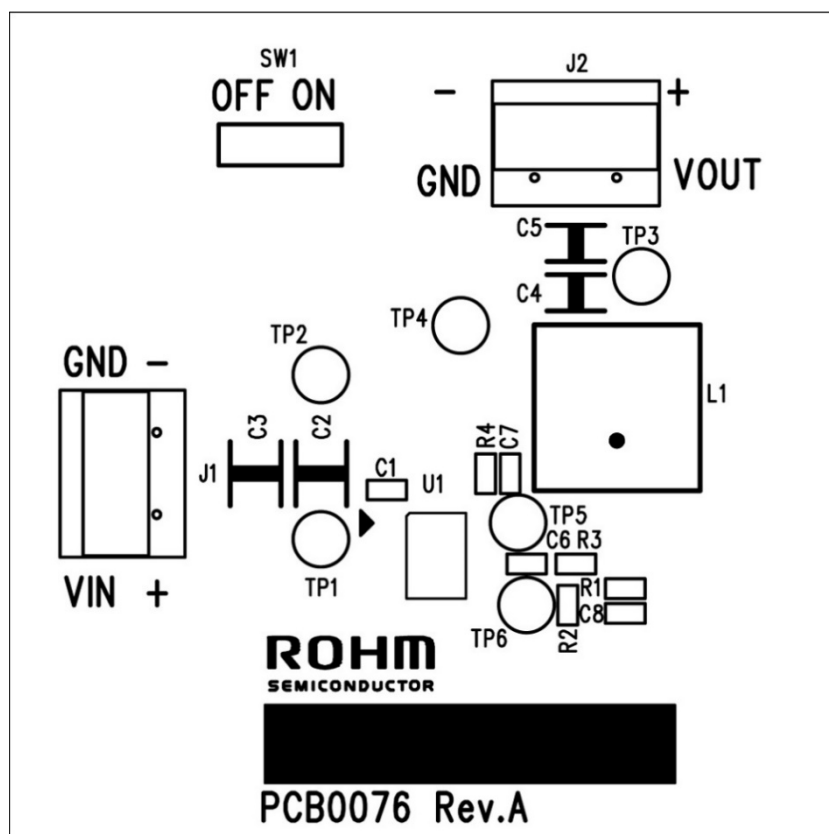


Figure 3. Top Silk Screen (Top view)

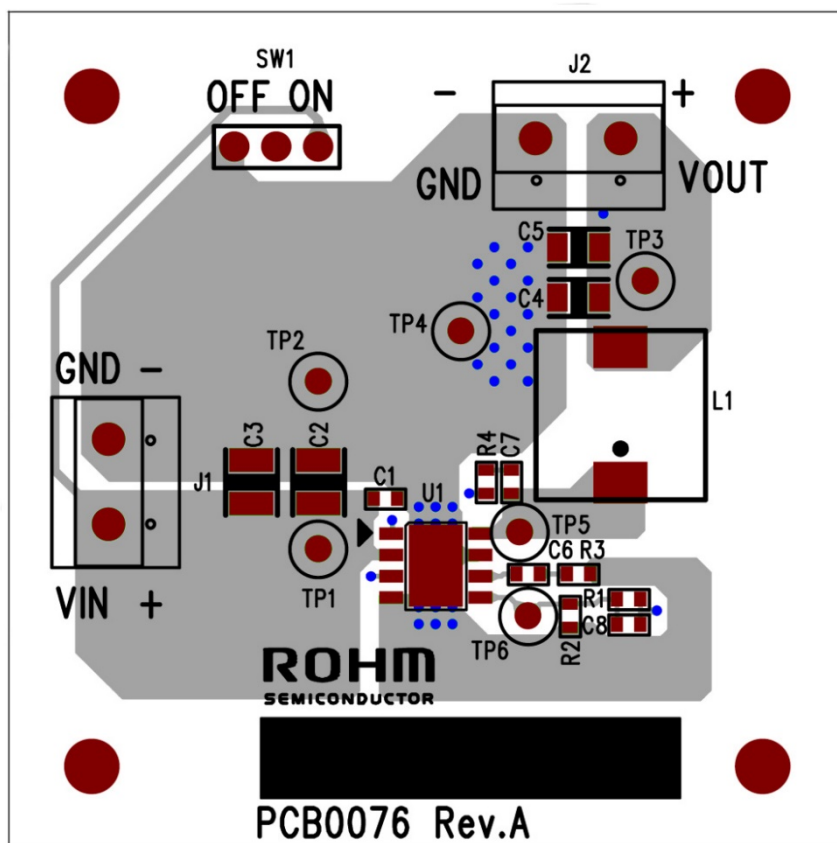


Figure 4. Top Silk Screen and Layout (Top view)

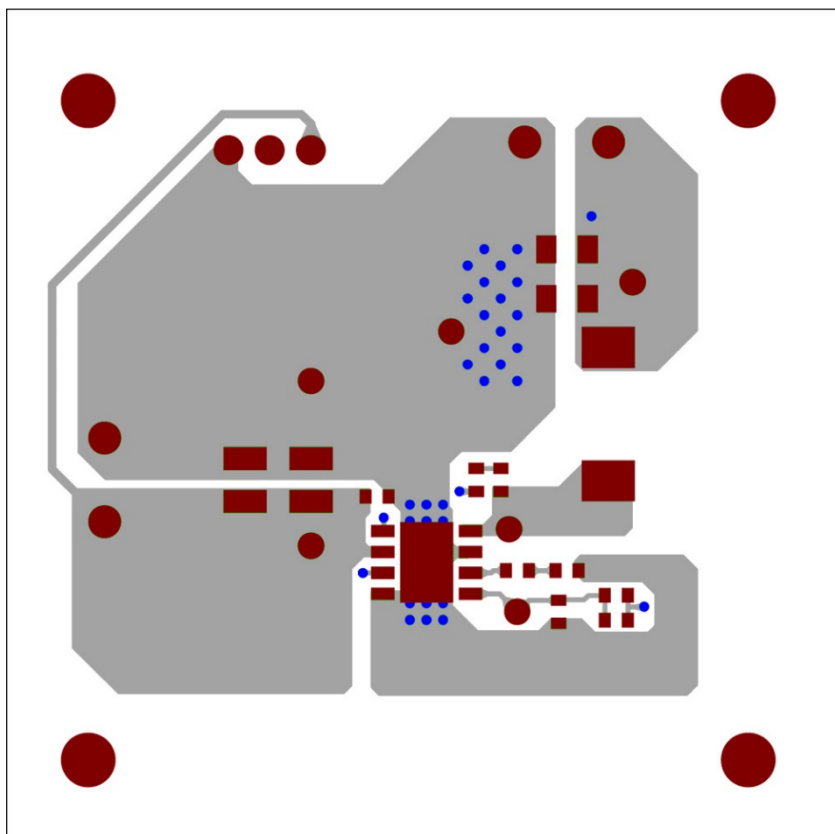


Figure 5. Top Side Layout (Top view)

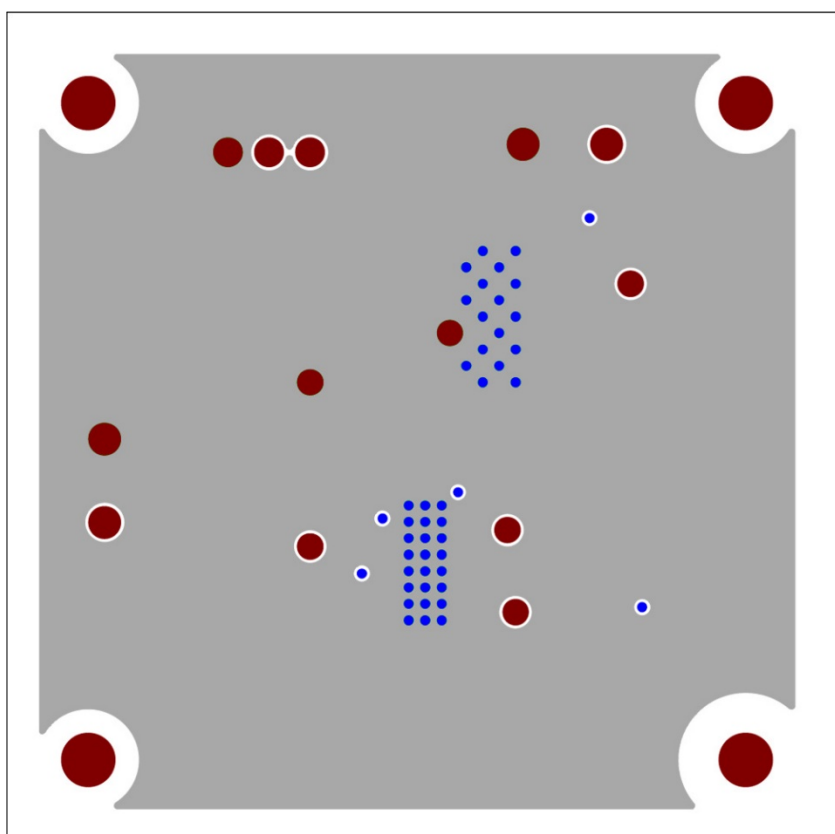


Figure 6. L2 Layout (Top view)

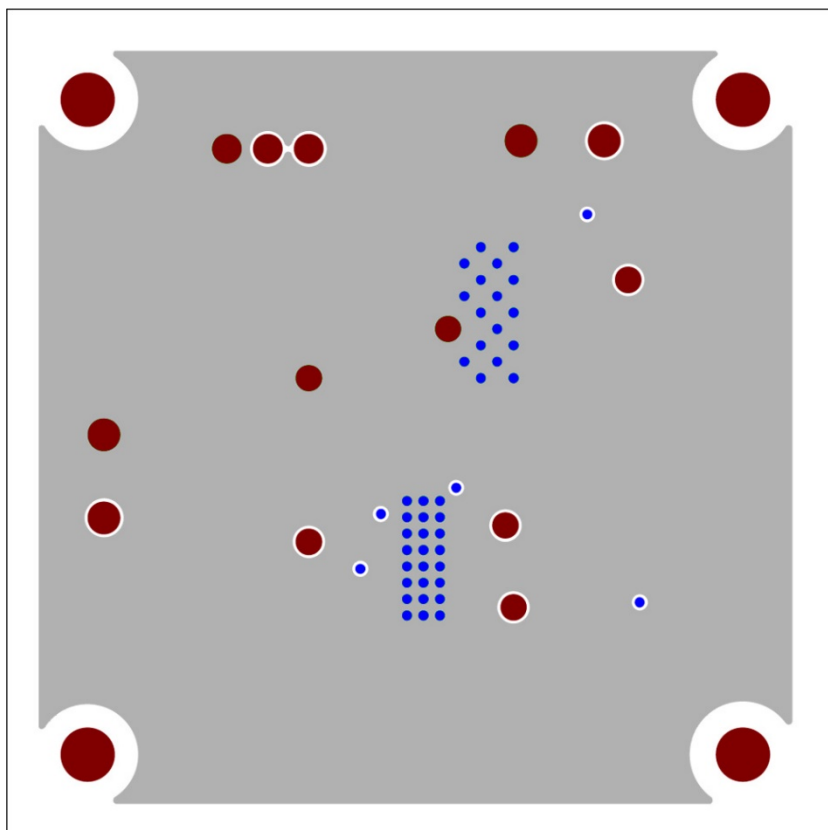


Figure 7. L3 Layout (Top view)

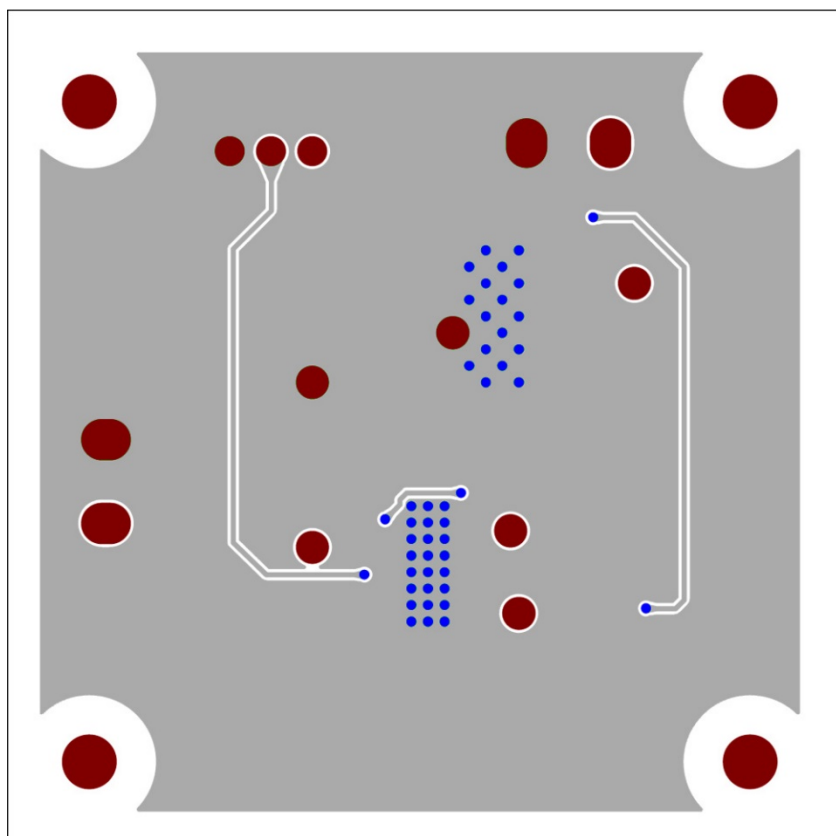


Figure 8. Bottom Side Layout (Top view)

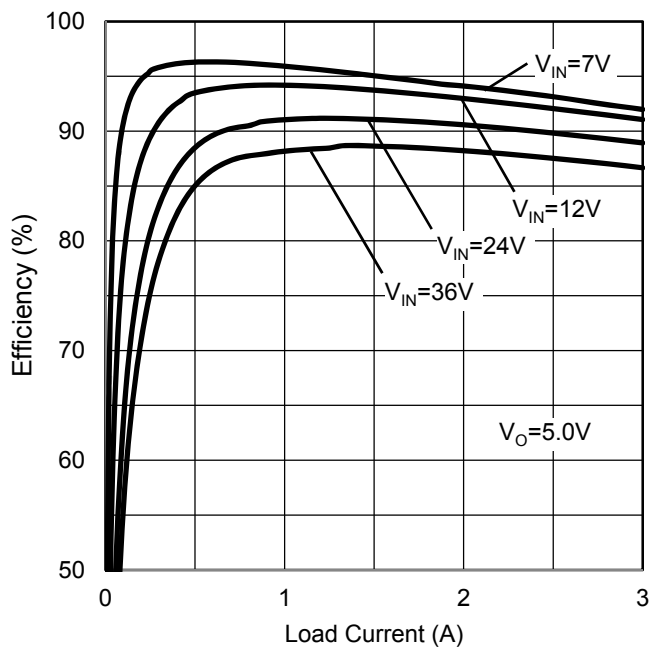


Figure 9. Efficiency vs Load Current

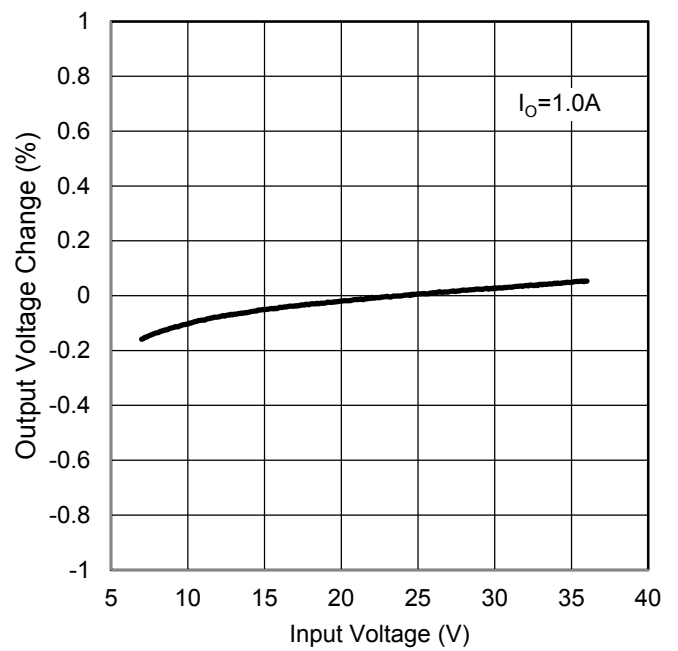


Figure 10. Line Regulation

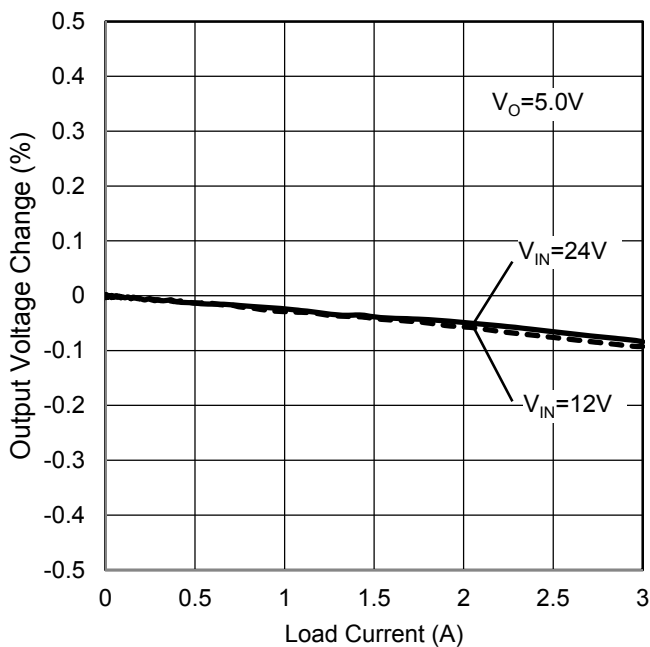


Figure 11. Load Regulation

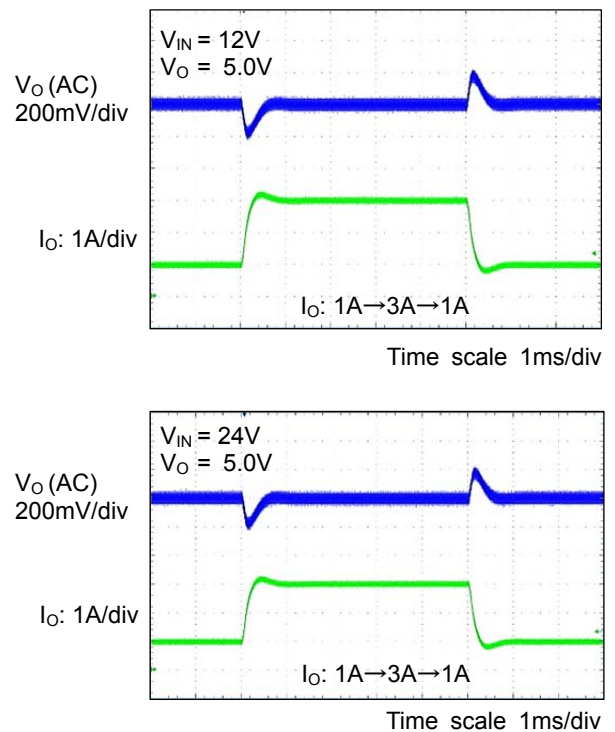
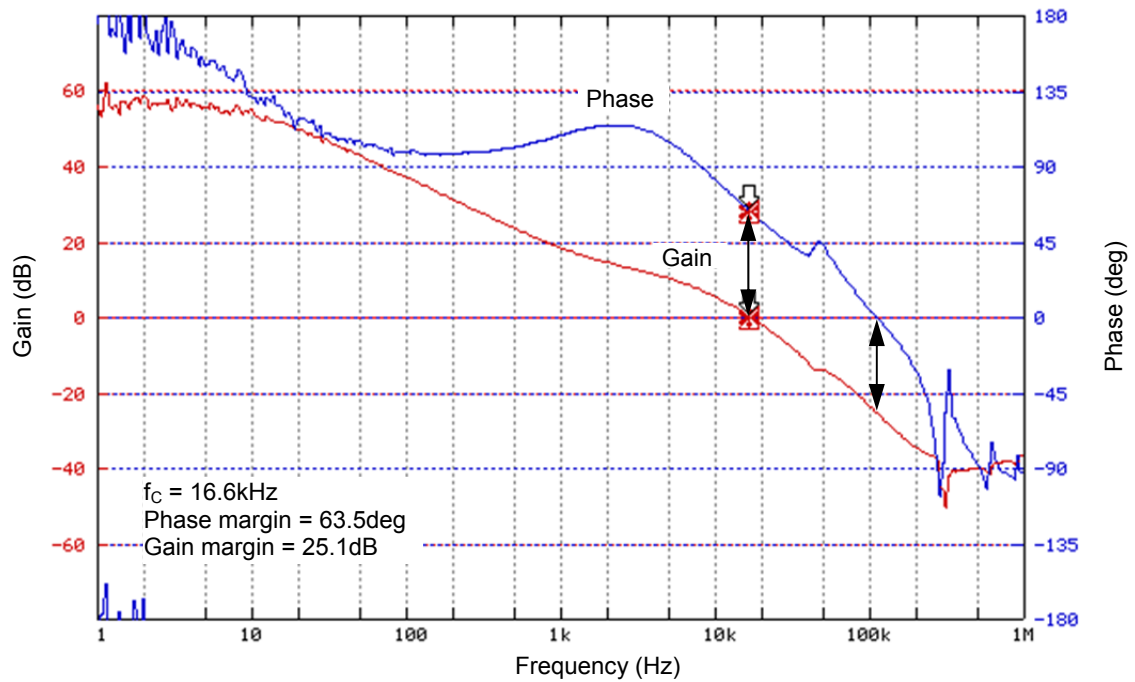
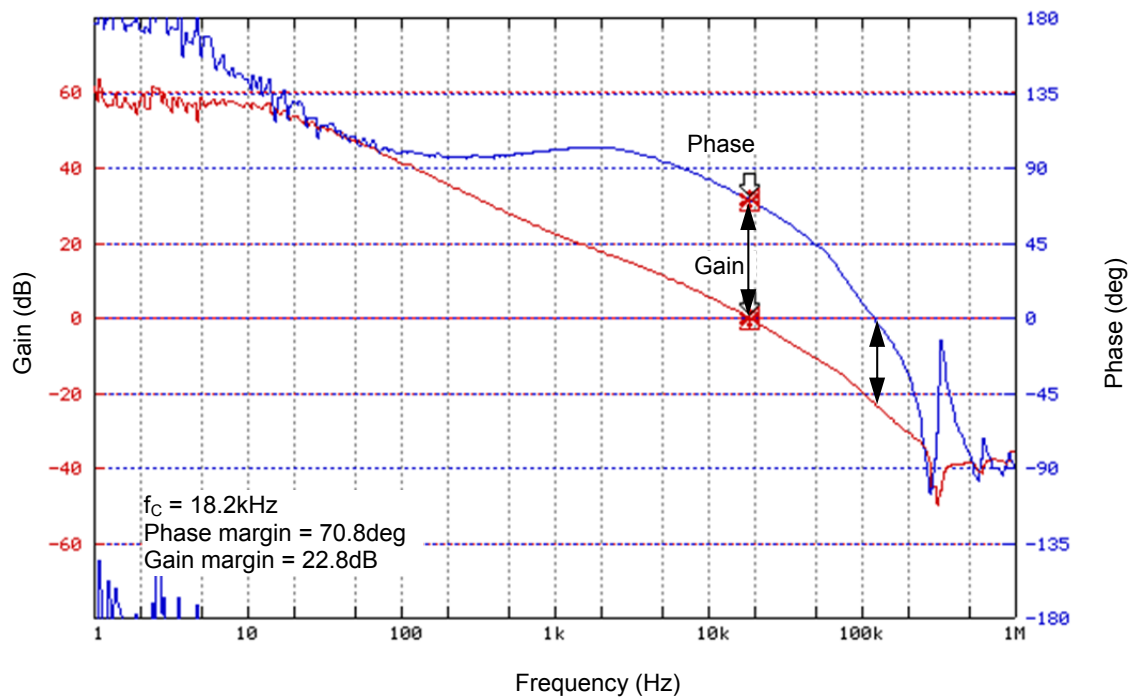


Figure 12. Load Transient Characteristics

Figure 13. Loop Response $V_{IN} = 12V$, $V_O = 5.0V$, $I_O = 3A$ Figure 14. Loop Response $V_{IN} = 24V$, $V_O = 5.0V$, $I_O = 3A$

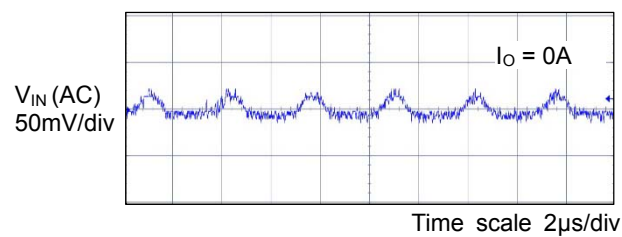


Figure 15. Input Voltage Ripple Wave
 $V_{IN} = 12V$, $V_O = 5.0V$

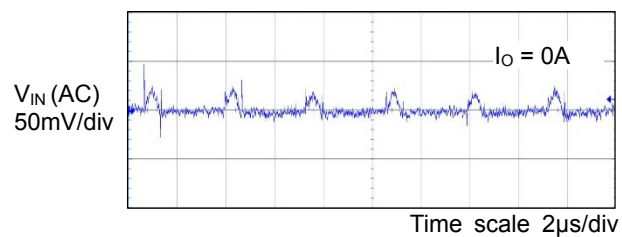


Figure 16. Input Voltage Ripple Wave
 $V_{IN} = 12V$, $V_O = 5.0V$

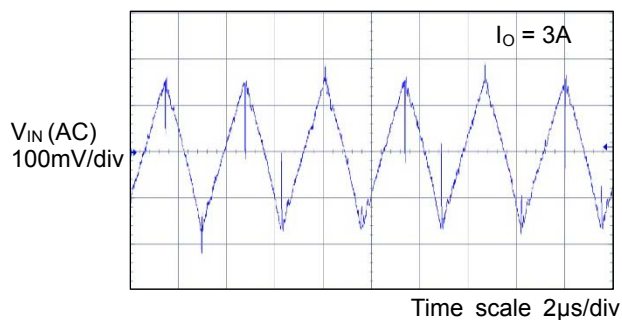


Figure 17. Output Voltage Ripple Wave
 $V_{IN} = 12V$, $V_O = 5.0V$

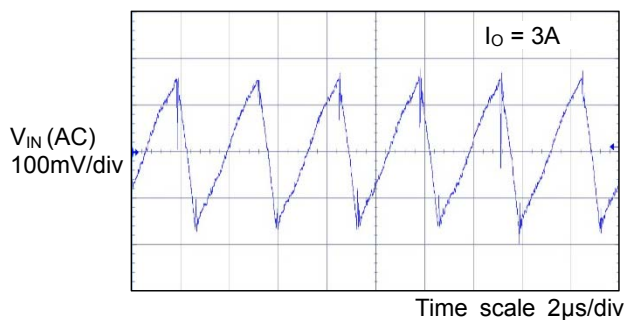


Figure 18. Output Voltage Ripple Wave
 $V_{IN} = 24V$, $V_O = 5.0V$

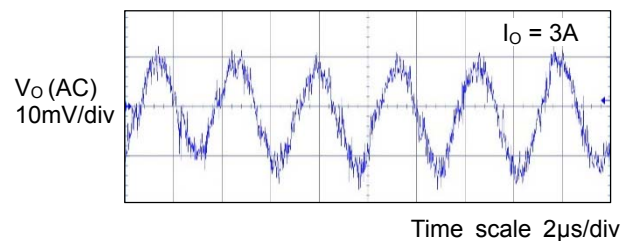
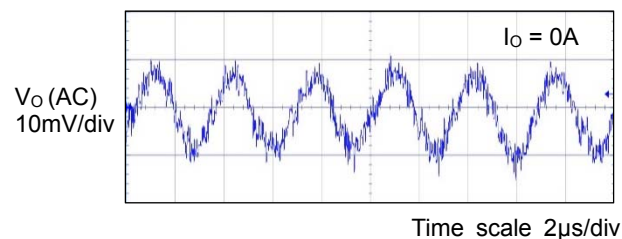


Figure 17. Output Voltage Ripple Wave
 $V_{IN} = 12V$, $V_O = 5.0V$

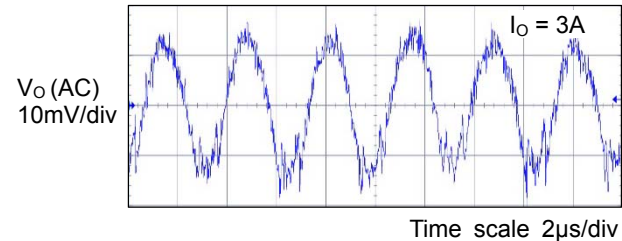
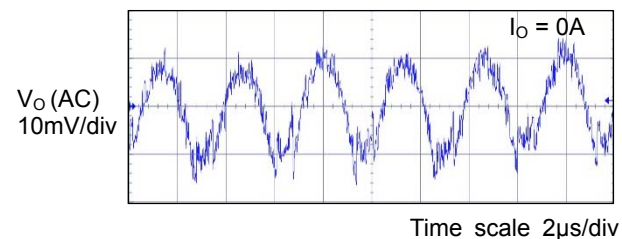


Figure 18. Output Voltage Ripple Wave
 $V_{IN} = 24V$, $V_O = 5.0V$

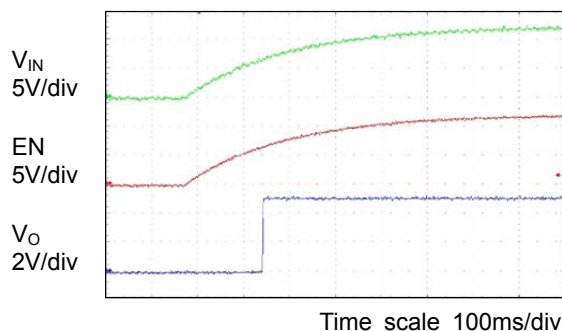


Figure 19. Start-up EN = V_{IN}
 $V_{IN} = 12V$, $V_O = 5.0V$, $I_O = 0A$

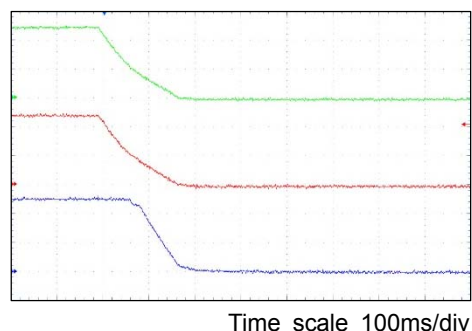


Figure 20. Power-down EN = V_{IN}
 $V_{IN} = 12V$, $V_O = 5.0V$, $I_O = 0A$

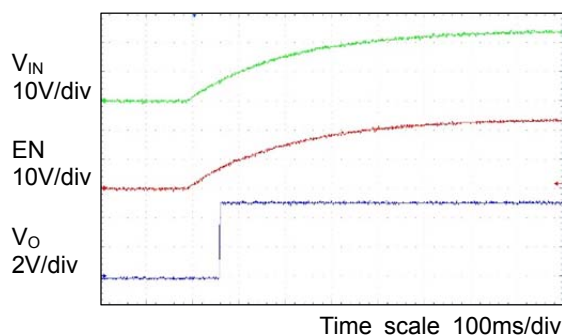


Figure 21. Start-up EN = V_{IN}
 $V_{IN} = 24V$, $V_O = 5.0V$, $I_O = 0A$

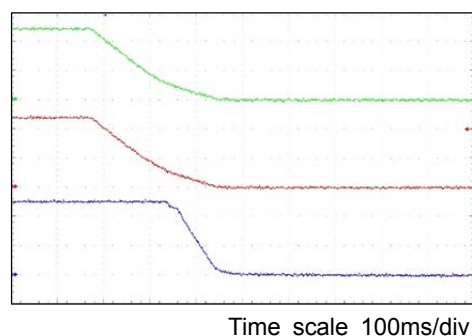


Figure 22. Power-down EN = V_{IN}
 $V_{IN} = 24V$, $V_O = 5.0V$, $I_O = 0A$

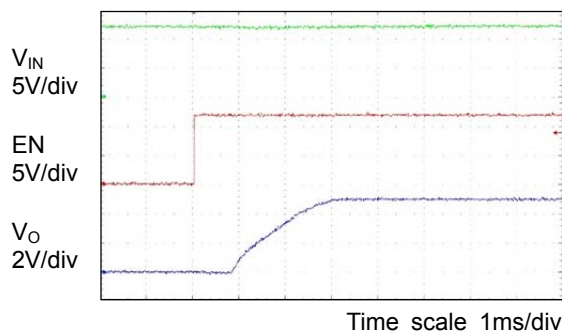


Figure 23. Start-up by EN
 $V_{IN} = 12V$, $V_O = 5.0V$, $I_O = 0A$

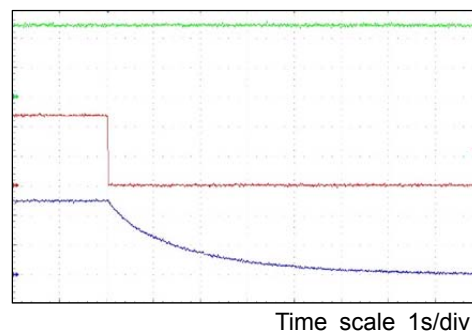


Figure 24. Power-down by EN
 $V_{IN} = 12V$, $V_O = 5.0V$, $I_O = 0A$

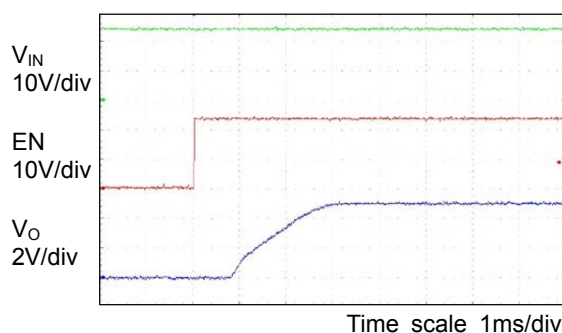


Figure 25. Start-up by EN
 $V_{IN} = 24V$, $V_O = 5.0V$, $I_O = 0A$

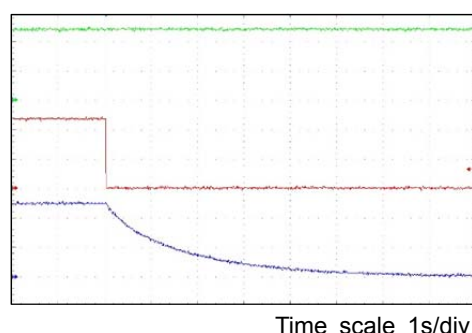


Figure 26. Power-down by EN
 $V_{IN} = 24V$, $V_O = 5.0V$, $I_O = 0A$

Notes

No copying or reproduction of this document, whole or in part, is permitted without the consent of ROHM Co., Ltd.

The contents specified herein are subject to change without notice.

The information contained in this document are for the purpose of introducing ROHM products (hereinafter "Products"). When using any such Products, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operation of the Products, and peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, ROHM shall bear no responsibility for any damages incurred from inaccuracies or the misprint of information.

The technical information specified herein is intended only to show the typical functions and examples of application circuits for the Products. ROHM does not grant, either explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. And ROHM shall bear no responsibility whatsoever for any disputes arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office automation equipment, communication devices, electronic appliances, and gaming systems).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM makes every effort to enhance the quality and reliability of its Products, Products may fail or malfunction for a variety of reasons.

Please be sure to implement safety measures to guard against the possibility of physical injury, fire or any other damage that may arise due to Product failure, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for the use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability, the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instruments, transportation equipment, aerospace machinery, nuclear reactor controllers, fuel controllers, or other safety device). ROHM shall bear no responsibility in any way for the use of any Products for the above special purposes. If a Product is to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If intending to export or ship overseas any Product or technology specified herein that is controlled under the Foreign Exchange and Foreign Trade Law it may be necessary to obtain a license or permit under the applicable law.

The logo for ROHM Semiconductor, featuring the word "ROHM" in a large, bold, white sans-serif font above the word "SEMICONDUCTOR" in a smaller, white sans-serif font, both set against a solid red rectangular background.

Thank you for your interest in ROHM products.
Please contact us for additional information or product catalogs.

ROHM Customer Support System

<http://www.rohm.com/contact/>