

GYM-BEAM Top Arm V2.1 - INSIDE dimensions, sheet 1 of 2 (mm, datum 0,0,0 = minimum corner)

SECTION KEY (top view outline, cut lines)

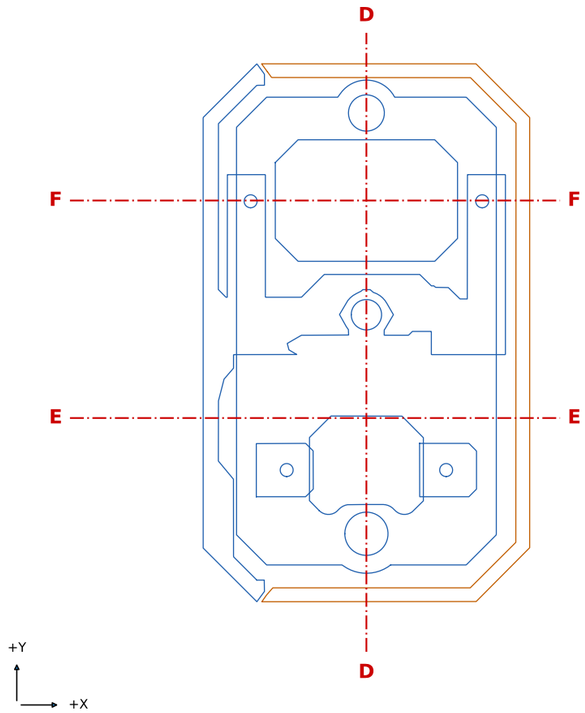


A-A, B-B, C-C are horizontal cuts at the heights shown in their titles.
Hatched = material. Green bold = open space / gap. Grey = wall thickness.


SECTION A-A at Z = 54.5 (just below top surface)

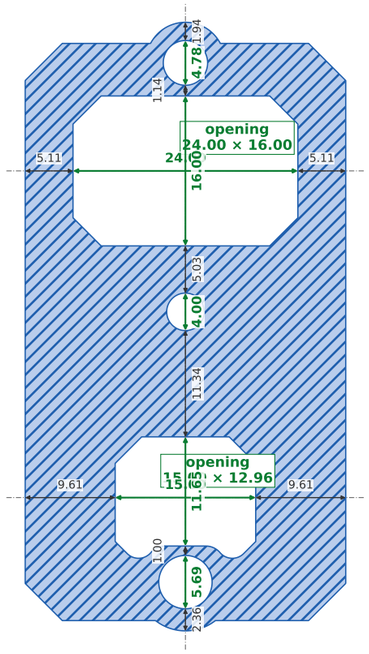

SECTION B-B at Z = 49.5 (pocket level under the top windows)

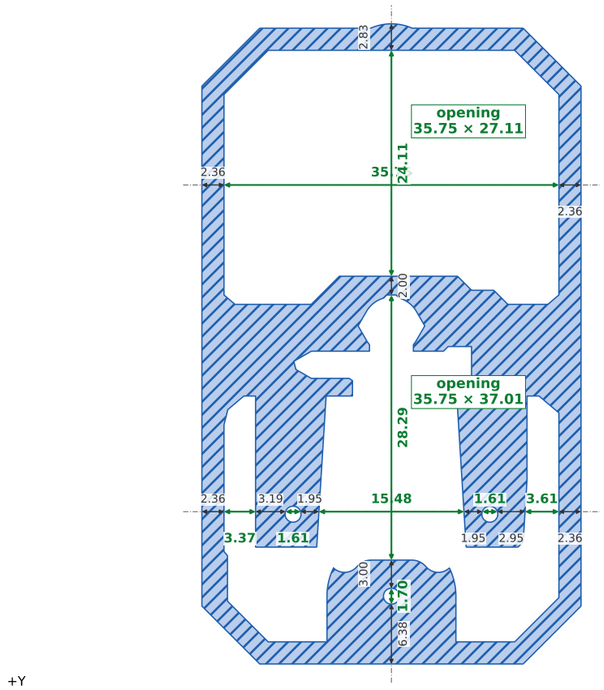


SECTION C-C at Z = 22.0 (mid-height of the body)

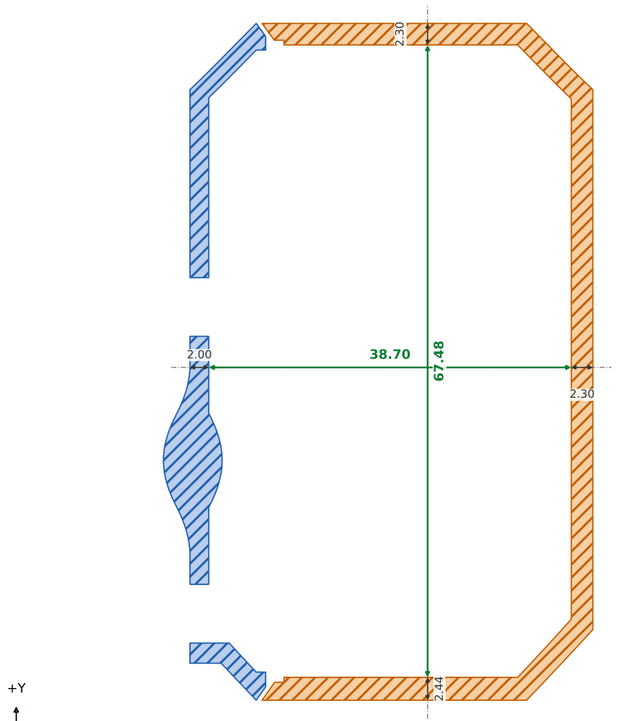


GYM-BEAM Top Arm V2.1 - INSIDE dimensions, sheet 2 of 2 (mm, datum 0,0,0 = minimum corner)


SECTION D-D at X = 35.04 (centre line, looking along -X)

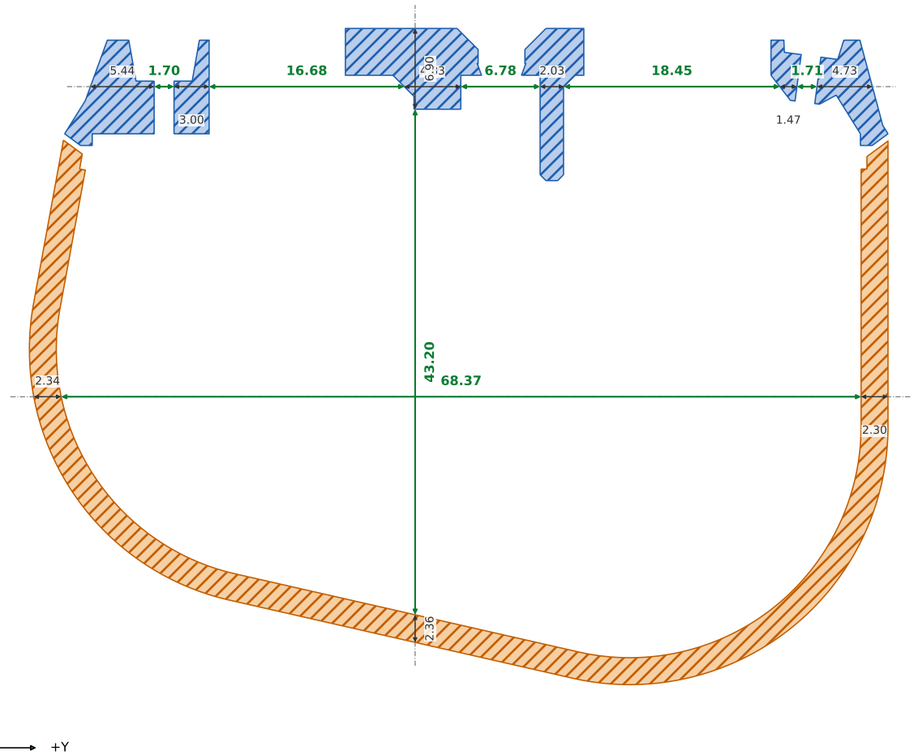

SECTION E-E at Y = 26.78 (through the 5 mm pivot bore, looking along +Y)

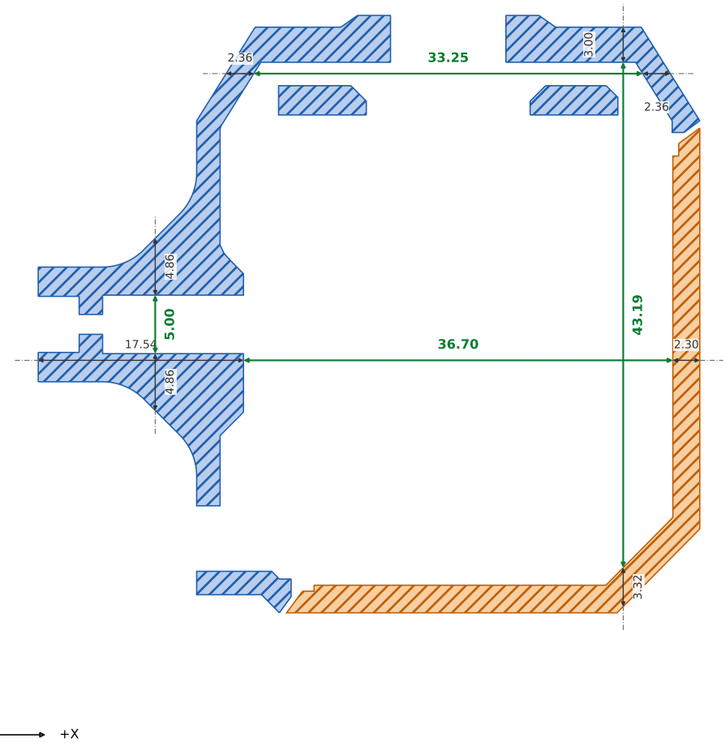

SECTION F-F at Y = 55.42 (through the large top window, looking along +Y)

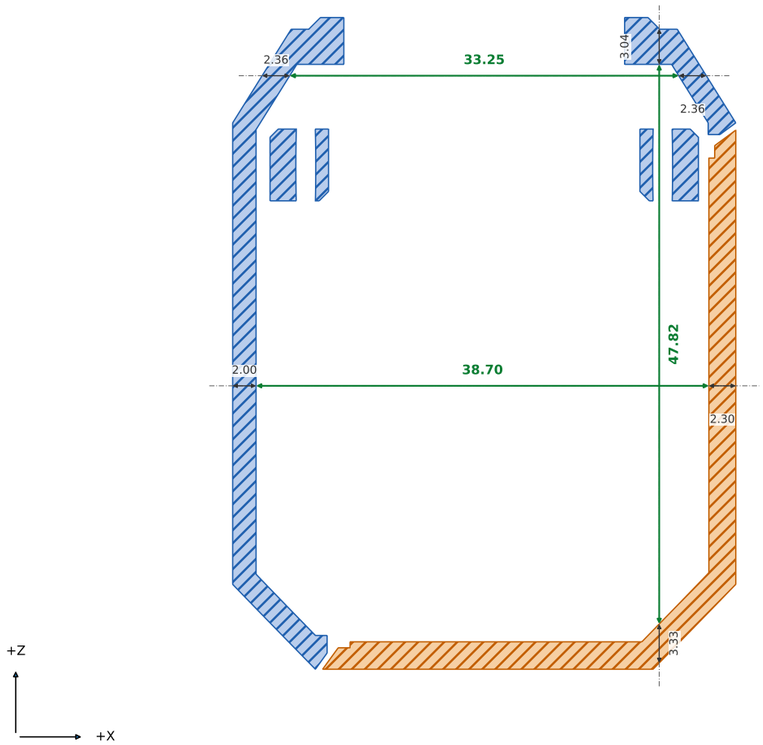

HOW TO READ THESE SECTIONS

- Each section is the part cut open by a flat plane (see the key on sheet 1).
- Hatched areas are solid material: blue = Part A, orange = Part B.
- The dash-dot lines are measuring lines. Along each one:
  green bold numbers = open space (inside gap, pocket, window, cavity)
  grey numbers = wall / material thickness
- 'opening W × L' boxes give the full size of a closed window in that cut.
- Part A and Part B are separate solids with a ~0.5 mm clearance between them, which shows as a small green gap where they meet.
- Exact values from the STEP model; text file with all numbers saved alongside.