Button

DETECT | RASPBERRY PI | INPUT

What does it do?

A button lets someone tell your program to do something the moment they press.

Inside are two metal contacts. Pressing pushes them together so electricity can flow, and letting go springs them apart again.

Your projects can use it to start something, stop something, or count how many times it has been pressed.

Uses



Pedestrian crossing

DETECT Button and traffic phase → **DECIDE** Is it safe to cross? → **DO** Change the lights



Do not press this

DETECT Button is pressed → **DECIDE** Is the trap armed? → **DO** Play a silly sound



Cap
Press here

Legs
Four, joined in pairs

Gap
Straddle the channel

Raspberry Pi Foundation

Code

Raspberry Pi

```
from gpiozero import Button


button = Button(24)

pressed = button.is_pressed
```

`pressed` is True or False. No resistor is needed — gpiozero switches on the pin's own pull-up. Also `button.when_pressed` and `button.when_released`.

Wiring

RASPBERRY PI 5

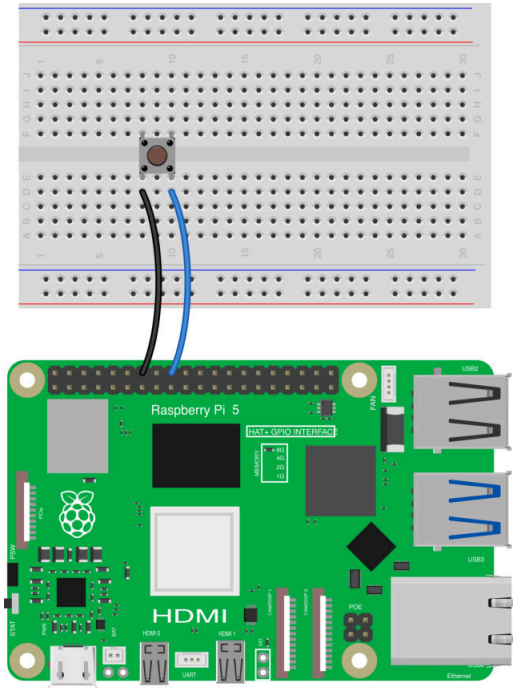

GPIO 24 (pin 18) → button → **GND** (pin 14)