LDR

DETECT PICO LIGHT

What does it do?

An LDR is a sensor that measures how bright or dark it is.

LDR stands for light-dependent resistor. Light shining on it lets electricity through more easily, so your code can tell light from dark.

Your projects can use it to react when a lamp comes on, when night falls, or when a shadow passes over.

Uses



Street light

DETECT How dark it is → **DECIDE** Is it darker than dusk? → **DO** Switch the lamp on



Biscuit tin alarm

DETECT Light inside the tin → **DECIDE** Is the lid open? → **DO** Sound the alarm



Window Light lands here

Track Zigzag sensor

Legs Either way round

Raspberry Pi Foundation

Code

Raspberry Pi Pico

```
from picozero import AnalogInputDevice


ldr = AnalogInputDevice(27)

light = ldr.value
```

`light` runs from 0 in the dark to 1 in bright light.
Also `ldr.voltage`.

Wiring

PICO

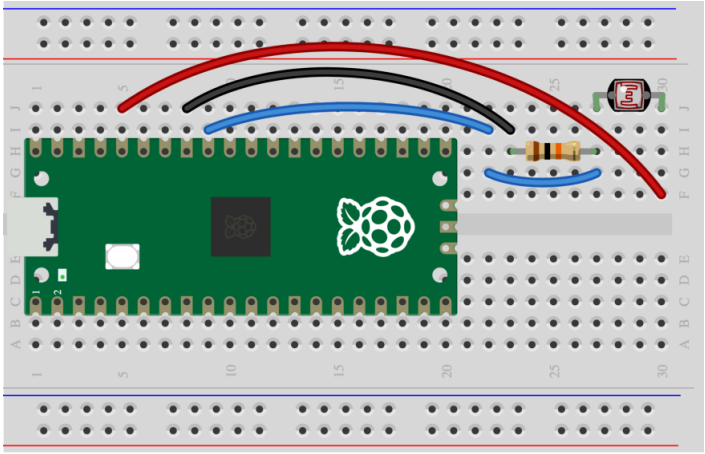

3V3 (pin 36) → LDR → **GP27** (pin 32) → 10 kΩ → **GND** (pin 33)