LED

DO | RASPBERRY PI | LIGHT

What does it do?

An LED is a tiny light that your code can switch on, switch off, or blink.

LED stands for light-emitting diode. It glows when electricity flows the right way through it, so the long leg and the short leg matter.


Your projects can use LEDs to show a warning, celebrate something, or tell people what is happening.

Uses




Car brake light

DETECT Brake control signal → **DECIDE** Is braking requested? → **DO** Light the red LEDs



One-eyed monster box

DETECT Box lid is opened → **DECIDE** Is guard mode armed? → **DO** Glow the monster eye

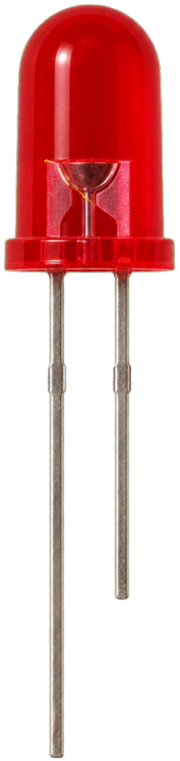

Anode
Long leg, to GPIO

Cathode
Short leg, to GND

Lens
Glows here

Raspberry Pi Foundation

Code

Raspberry Pi

```
from gpiozero import LED


led = LED(26)

led.on()
```

Also `led.off()`, `led.toggle()` and `led.blink()`. Give `blink()` an `on_time` and an `off_time` to set the flash speed.

Wiring

RASPBERRY PI 5

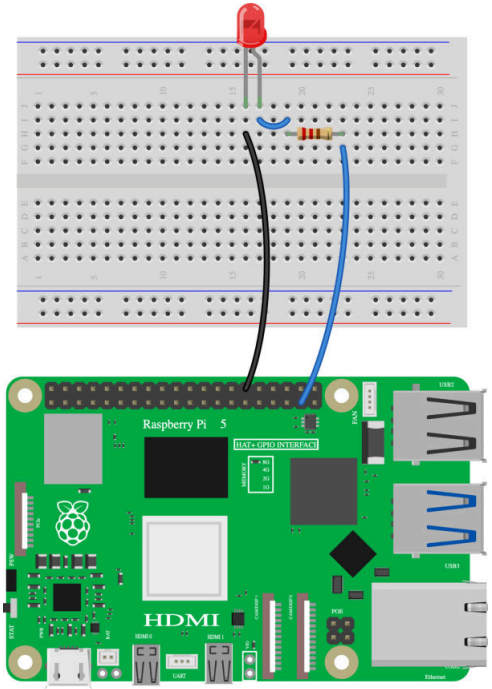

GPIO 26 (pin 37) → 220 Ω → LED → **GND** (pin 30)