RGB LED

DO | RASPBERRY PI | OUTPUT | LIGHT

What does it do?

An RGB LED puts red, green and blue lights inside one clear package.

Varying the brightness of the three colours mixes millions of possible colours.

A common-cathode LED has one shared negative leg and needs one resistor for each colour.

Uses



Wi-Fi router status

DETECT Read connection status → **DECIDE** Which status colour is needed? → **DO** Mix the LED colour



Mood crystal

DETECT Read the mood dial → **DECIDE** What is the crystal's mood? → **DO** Glow that colour



Clear lens
Contains three LEDs

Long leg
Common cathode

R, G and B legs
One 220 ohm resistor each

Raspberry Pi Foundation

Code

Raspberry Pi

```
from gpiozero import RGBLED


light = RGBLED(red=7, green=5, blue=6)

light.color = (1, 0, 1)
```

Colour values run from 0 to 1. This example makes magenta.

Wiring

RASPBERRY PI 5

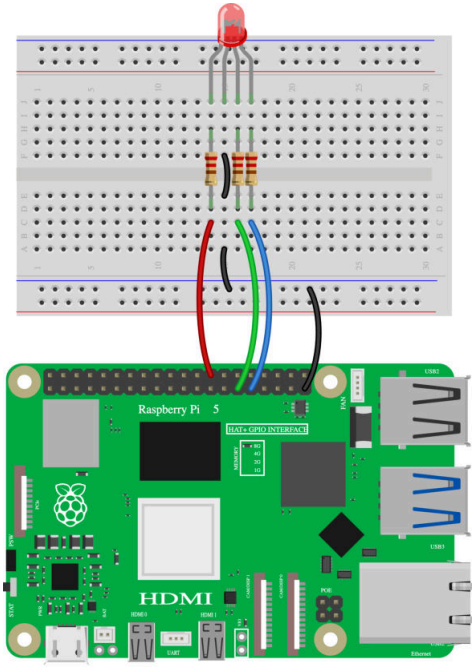

R → **GPIO7** (pin 26), G → **GPIO5** (pin 29), B → **GPIO6** (pin 31); common → **GND** (pin 39)