RGB LED

DO PICO OUTPUT LIGHT

What does it do?

An RGB LED puts red, green and blue lights inside one clear package.

Varying the brightness of the three colours mixes millions of possible colours.

A common-cathode LED has one shared negative leg and needs one resistor for each colour.

Uses



Wi-Fi router status

DETECT Read connection status → **DECIDE** Which status colour is needed? → **DO** Mix the LED colour



Mood crystal

DETECT Read the mood dial → **DECIDE** What is the crystal's mood? → **DO** Glow that colour



Clear lens
Contains three LEDs

Long leg
Common cathode

R, G and B legs
One 220 ohm resistor each

Raspberry Pi Foundation

Code

Raspberry Pi Pico

```
from picozero import RGBLED


light = RGBLED(red=3, green=4, blue=5)

light.color = (255, 0, 255)
```

picozero colour values run from 0 to 255. This example makes magenta.

Wiring

PICO

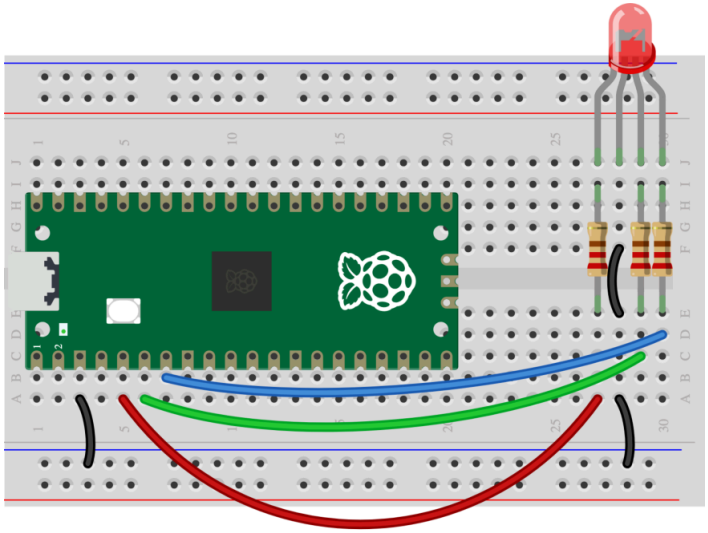

R → **GP3** (pin 5), G → **GP4** (pin 6), B → **GP5** (pin 7); common → **GND** (pin 3)