

Capacitive touch

DETECT

INPUT

What does it do?

A capacitive touch sensor notices when a finger comes close to its metal pad.


It detects the tiny change in electric charge caused by your body, so no moving parts are needed.

Use it anywhere a project needs a hidden, wipe-clean or feather-light button.


Uses



Touch lamp



Banana piano



Touch pad

The large
metal spiral

SIG

Digital output

**VCC and
GND**

3.3 V power

Code

● Raspberry Pi

```
from gpiozero import DigitalInputDevice

touch = DigitalInputDevice(16, pull_up=False)

touched = touch.is_active
```

● Raspberry Pi Pico

```
from picozero import TouchSensor

touch = TouchSensor(22)


touched = touch.is_touched
```

The TTP223 output goes high while touched.

touched is True or False.


Wiring

RASPBERRY PI 5

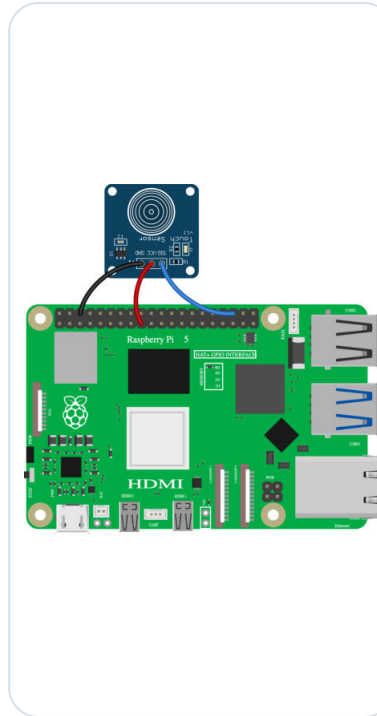

GND → GND, **3V3** → VCC, **GPIO 16** → SIG

PICO

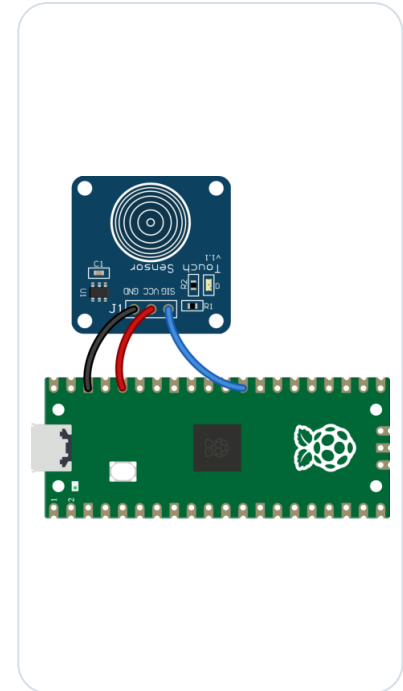

GND → GND, **3V3 OUT** → VCC, **GP22** → SIG