

NeoPixels

DO

OUTPUT

LIGHT

What does it do?

A NeoPixel is a full-colour LED with a tiny controller built into it.

One data wire carries colour instructions, and each pixel passes the remaining instructions onwards.

The 3.3 V-compatible JST breakout shown here can connect directly to a Pi or Pico.

Uses



Progress bar

DETECT
Measure
progress

DECIDE
How many
pixels to fill

DO
Light the strip



Disco shoelace meter

DETECT
Measure
dance energy

DECIDE
Choose
colours and
pattern

DO
Animate the
pixels



Pixel
RGB LED
and
controller

IN
Data from
the board

OUT
Data to
another
pixel

**VDD
and
GND**
3.3 V
power

Code

● Raspberry Pi

```
import board
import neopixel

pixels = neopixel.NeoPixel(board.D18, 1)

pixels[0] = (255, 0, 80)
```

● Raspberry Pi Pico


```
from machine import Pin
from neopixel import NeoPixel

pixels = NeoPixel(Pin(28), 1)
pixels[0] = (255, 0, 80)
pixels.write()
```

This wiring is for the pictured 3.3 V-compatible breakout. Generic 5 V strips usually need a separate supply and a logic-level shifter.


Wiring

RASPBERRY PI 5

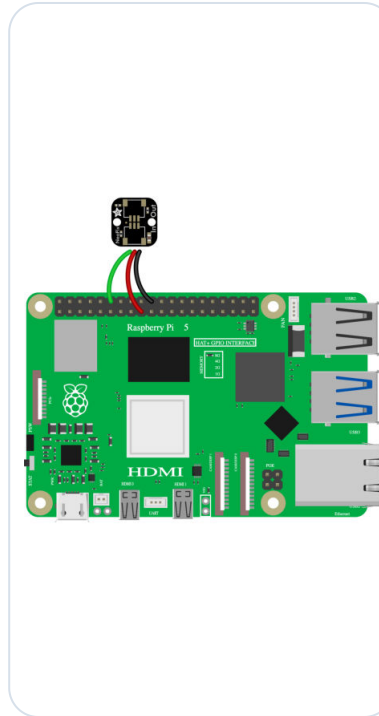

GPIO18 → IN, **3V3** → VDD, **GND** → GND

PICO

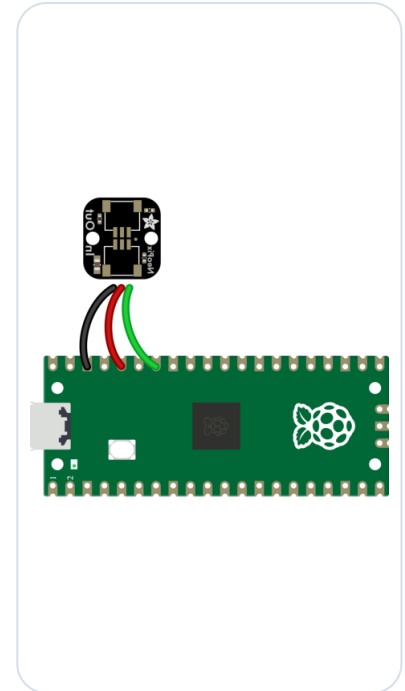

GP28 → IN, **3V3 OUT** → VDD, **GND** → GND