

Toggle switch

DETECT

INPUT

What does it do?

A toggle switch stays in the position you move it to, unlike a push button.

Its centre COM leg connects to one outside leg in each position.

It is useful when a project needs a lasting on/off choice or two modes.

Uses



Mode selector

DETECT

Read the
switch
position



DECIDE

Choose a
mode



DO

Run that
behaviour



Serious business lever

DETECT

Lever is
thrown



DECIDE

Serious
mode
selected



DO

Start
unnecessary
sirens



Lever

Stays where it
is moved

COM

Centre pin

L1 and L2

The two
choices

Code

● Raspberry Pi

```
from gpiozero import Button  
  
mode = Button(23)  
  
mode_two = mode.is_pressed
```


● Raspberry Pi Pico

```
from picozero import Switch  
  
mode = Switch(16)  
  
mode_two = mode.is_closed
```

Connect COM and one outside pin. The unused outside pin can be left unconnected.


Wiring

RASPBERRY PI 5

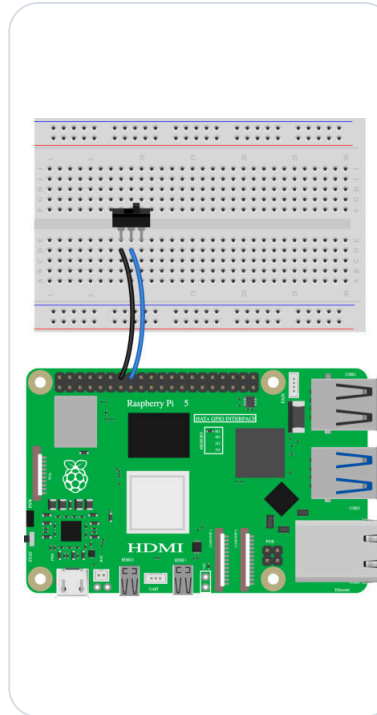

GPIO 23 → COM; one outside pin → **GND**

PICO

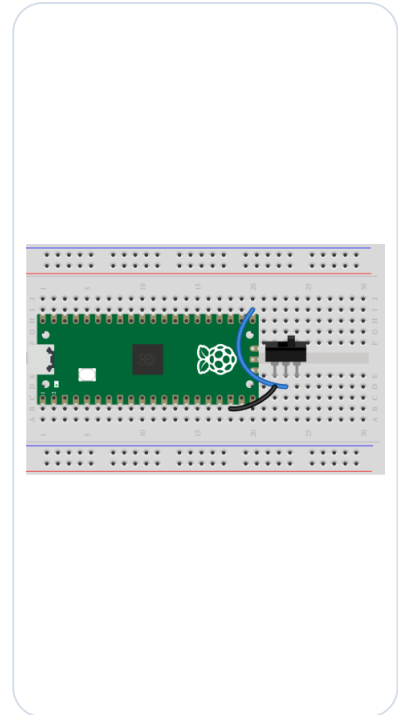

GP16 → COM; one outside pin → **GND**