
PoopVolt / prototype electrical wiring


As built in PR #49 — 10 October 2026 — USB power, 3.3 V Grove ports

Grove conductors: 1 yellow / 2 white / 3 red (VCC) / 4 black (GND)

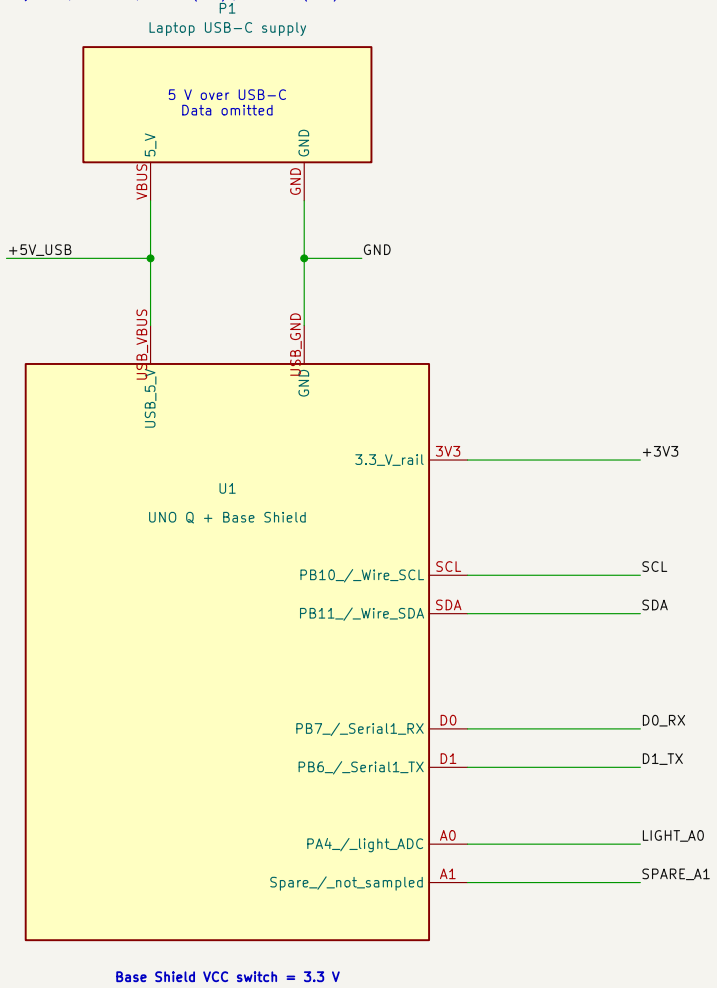

Base Shield VCC switch = 3.3 V

STM32U585 MCU / 3.3 V I/O
Wire = MCU I2C2
Serial1 = MCU USART1
Linux Bridge is internal UART
Bridge does not use D0 / D1

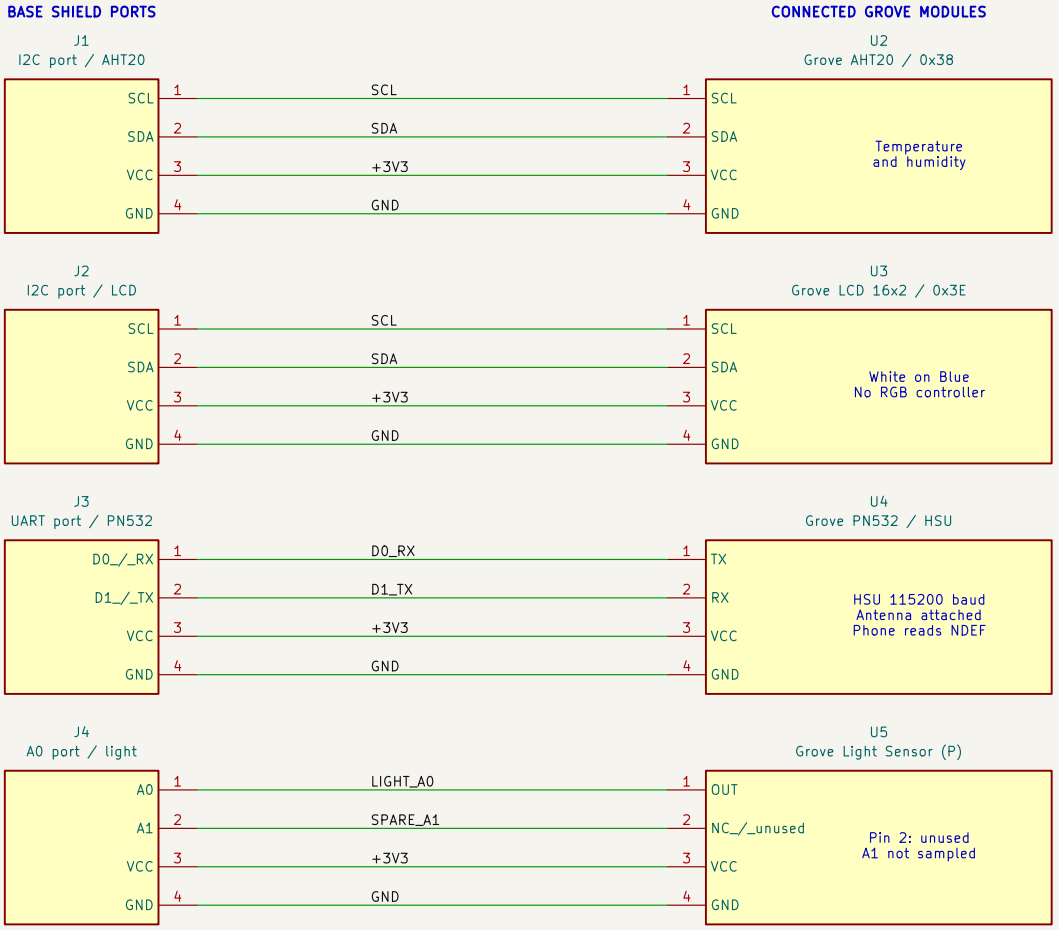

Same-name net labels are electrically connected. Each drawn line is one conductor.
Connector pin numbers follow Grove convention, not a left-to-right connector view.

Disconnected: ACS70331 current sensor, Modulino Movement, Media Carrier.
Solar / battery / converter power and Wi-Fi camera integration remain outside this wiring.

Module / connector view; no PCB footprints
USB-powered assembly reported in PR #49
HackTurin 2026

Sheet: /
File: poopvolt.kicad_sch

Title: PoopVolt — prototype electrical interconnect

Size: A4	Date: 2026-10-10	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: 1/1