

# Button

DETECT

INPUT

## What does it do?

A button lets someone tell your program to do something the moment they press.

Inside are two metal contacts. Pressing pushes them together so electricity can flow, and letting go springs them apart again.

Your projects can use it to start something, stop something, or count how many times it has been pressed.

## Uses



### Pedestrian crossing

**DETECT**  
Button and  
traffic phase



**DECIDE**  
Is it safe to  
cross?



**DO**  
Change the  
lights



### Do not press this


**DETECT**  
Button is  
pressed



**DECIDE**  
Is the trap  
armed?



**DO**  
Play a silly  
sound

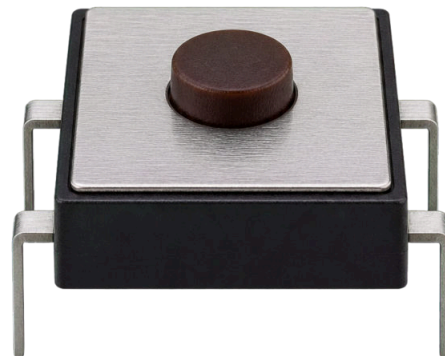

**Cap**

Press here

**Legs**

Four, joined in  
pairs

**Gap**

Straddle the  
channel

# Code

## ● Raspberry Pi

```
from gpiozero import Button  
  
button = Button(24)  
  
pressed = button.is_pressed
```


## ● Raspberry Pi Pico

```
from picozero import Button  
  
button = Button(16)  
  
pressed = button.is_pressed
```

`pressed` is True or False. No resistor is needed — both libraries switch on the pin's own pull-up. Also `button.when_pressed` and `button.when_released`.


# Wiring

## RASPBERRY PI 5

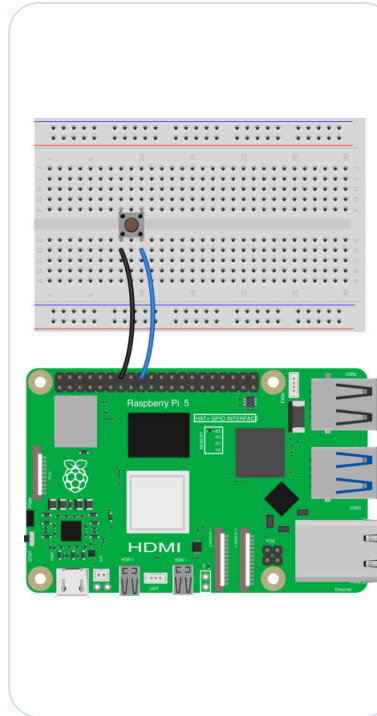

GPIO 24 → button → GND

## PICO

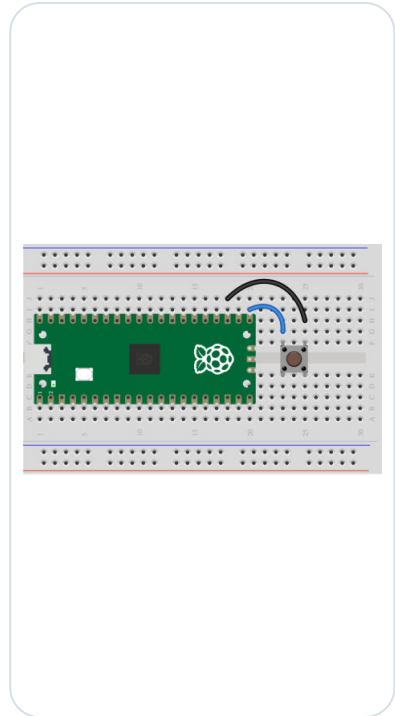

GP16 → button → GND