

Buzzer

DO

SOUND

What does it do?

A buzzer makes a sound the moment your code switches it on.

An active buzzer has its tone built in, so it beeps at one fixed pitch. You switch it on and off rather than choosing notes.

Your projects can use it for an alarm, a warning, a countdown, or a fanfare when somebody wins.

Uses



Smoke alarm

DETECT

Measure smoke level



DECIDE

Is smoke above the limit?



DO

Sound the buzzer



Buzz wire game

DETECT

Loop touches wire



DECIDE

Is this the third strike?



DO

Sound the failure buzzer



+ leg

Longer, to GPIO

- leg

Shorter, to GND

Vent

Sound comes out

Code

● Raspberry Pi

```
from gpiozero import Buzzer  
  
buzzer = Buzzer(12)  
  
buzzer.on()
```


● Raspberry Pi Pico

```
from picozero import Buzzer  
  
buzzer = Buzzer(16)  
  
buzzer.on()
```

Also `buzzer.off()`, `buzzer.toggle()` and `buzzer.beep()`. Give `beep()` an `on_time` and an `off_time` to set the rhythm.


Wiring

RASPBERRY PI 5

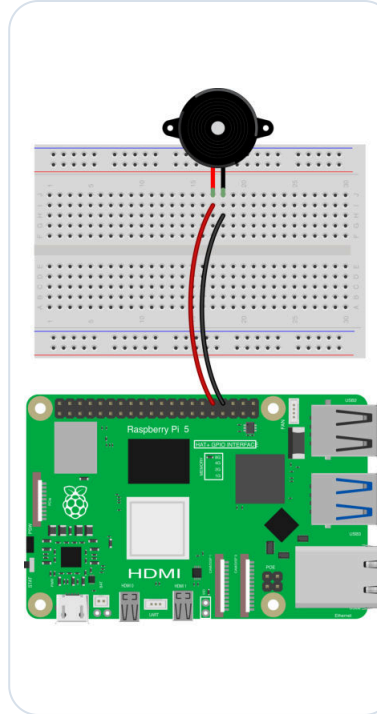

GPIO 12 → + buzzer - → GND

PICO

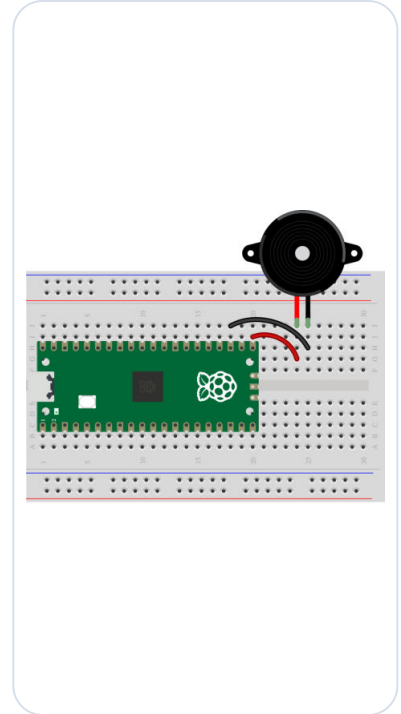

GP16 → + buzzer - → GND