

LED

DO

LIGHT

What does it do?

An LED is a tiny light that your code can switch on, switch off, or blink.

LED stands for light-emitting diode. It glows when electricity flows the right way through it, so the long leg and the short leg matter.

Your projects can use LEDs to show a warning, celebrate something, or tell people what is happening.

Uses



Car brake light

DETECT

Brake control
signal



DECIDE

Is braking
requested?



DO

Light the red
LEDs



One-eyed monster box

DETECT

Box lid is
opened




DECIDE

Is guard
mode armed?



DO

Glow the
monster eye

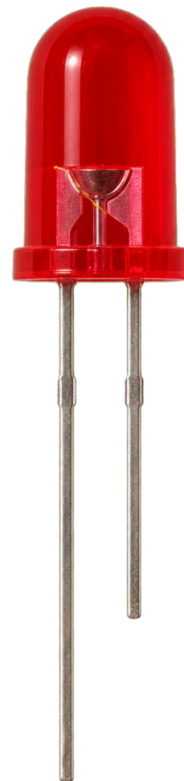

Anode

Long leg, to
GPIO

Cathode

Short leg, to
GND

Lens

Glow here

Code

● Raspberry Pi

```
from gpiozero import LED

led = LED(17)

led.on()
```

● Raspberry Pi Pico

```
from picozero import LED


led = LED(16)

led.on()
```

Also `led.off()`, `led.toggle()` and `led.blink()`. Give `blink()` an `on_time` and an `off_time` to set the flash speed.


Wiring

RASPBERRY PI 5

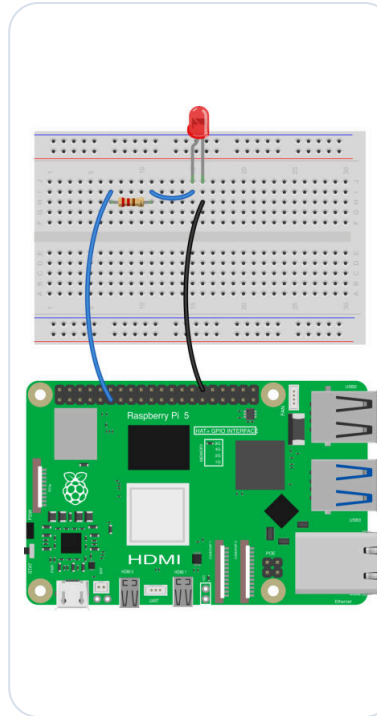

GPIO 17 → 220 Ω → LED → GND

PICO

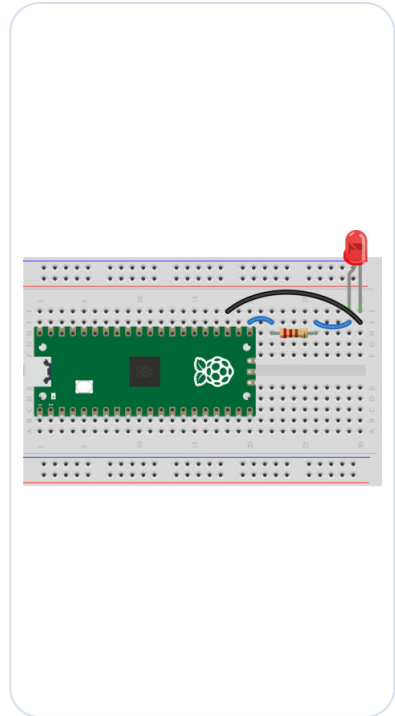

GP16 → 220 Ω → LED → GND