

Button

DETECT

INPUT

What does it do?

A button lets someone tell your program to do something the moment they press.

Inside are two metal contacts. Pressing pushes them together so electricity can flow, and letting go springs them apart again.

Your projects can use it to start something, stop something, or count how many times it has been pressed.

Uses



Pedestrian crossing

DETECT
Button is pressed



DECIDE
Someone is waiting



DO
Change the lights



Do not press this


DETECT
Button is pressed



DECIDE
They could not resist



DO
Play a silly sound

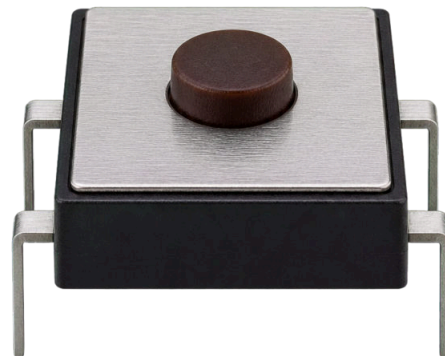

Cap

Press here

Legs

Four, joined in pairs

Gap

Straddle the channel

Code

● Raspberry Pi

```
from gpiozero import Button  
  
button = Button(24)  
  
pressed = button.is_pressed
```


● Raspberry Pi Pico

```
from picozero import Button  
  
button = Button(16)  
  
pressed = button.is_pressed
```

`pressed` is True or False. No resistor is needed — both libraries switch on the pin's own pull-up. Also `button.when_pressed` and `button.when_released`.


Wiring

RASPBERRY PI 5

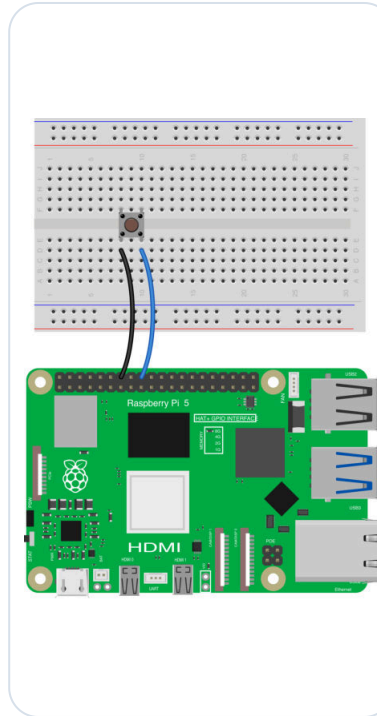

GPIO 24 → button → GND

PICO

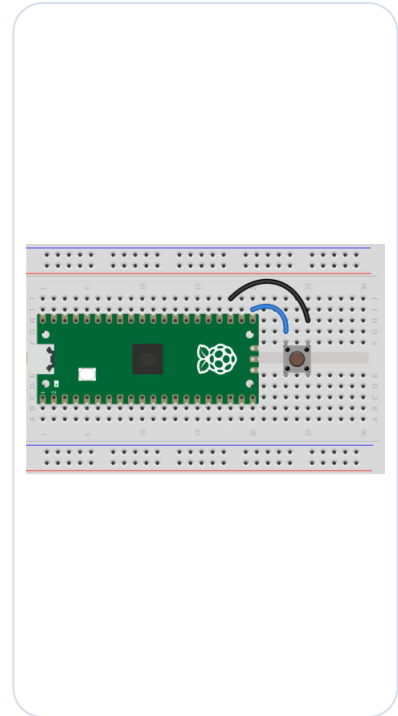

GP16 → button → GND