

Buzzer

DO

SOUND

What does it do?

A buzzer makes a sound the moment your code switches it on.

An active buzzer has its tone built in, so it beeps at one fixed pitch. You switch it on and off rather than choosing notes.

Your projects can use it for an alarm, a warning, a countdown, or a fanfare when somebody wins.

Uses



Smoke alarm

DETECT
Smoke in the air

DECIDE
There is a fire

DO
Sound the alarm



Buzz wire game

DETECT
Loop touches wire

DECIDE
A wobble, so out

DO
Buzz loudly



+ leg
Longer, to
GPIO

- leg
Shorter, to GND

Vent
Sound comes
out

Code

● Raspberry Pi

```
from gpiozero import Buzzer  
  
buzzer = Buzzer(12)  
  
buzzer.on()
```


● Raspberry Pi Pico

```
from picozero import Buzzer  
  
buzzer = Buzzer(16)  
  
buzzer.on()
```

Also `buzzer.off()`, `buzzer.toggle()` and `buzzer.beep()`. Give `beep()` an `on_time` and an `off_time` to set the rhythm.


Wiring

RASPBERRY PI 5

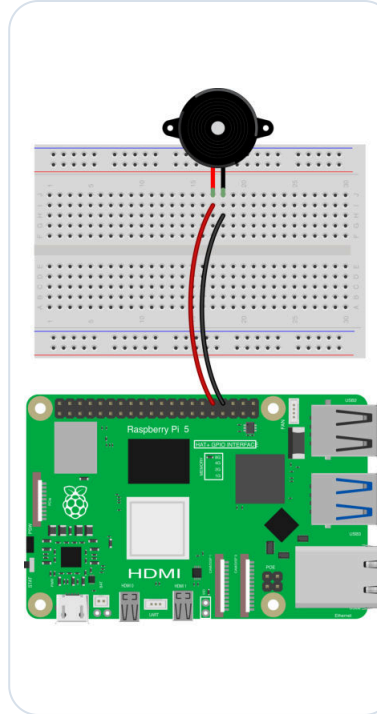

GPIO 12 → + buzzer - → GND

PICO

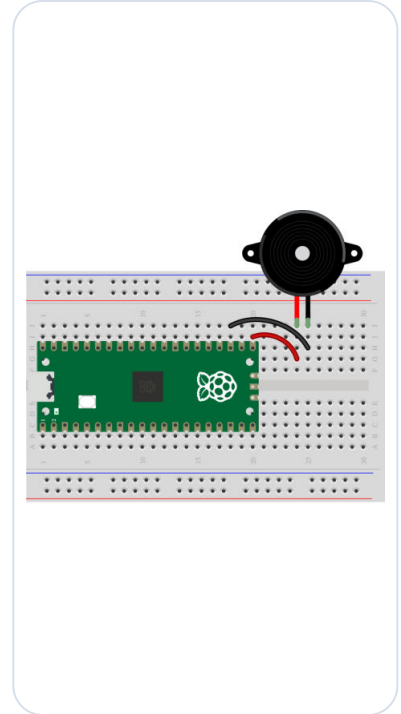

GP16 → + buzzer - → GND