

Line sensor

DETECT

INPUT

What does it do?

A line sensor tells light and dark surfaces apart underneath a moving project.

An infrared LED shines at the floor and a detector measures how much light bounces back.

Adjust the small potentiometer until its digital output changes reliably at the line edge.

Uses



Robot vacuum cliff sensor

DETECT
Read floor
reflection



DECIDE
Is floor
missing



DO
Stop and turn



Secret floor rune

DETECT
Read reflected
light



DECIDE
Is the mark
dark



DO
Light the
secret LED



Infrared pair
Faces the floor

Adjuster
Sets the
threshold

S
Digital signal

Code

● Raspberry Pi

```
from gpiozero import LineSensor  
  
line = LineSensor(16)  
  
on_line = line.is_active
```


● Raspberry Pi Pico

```
from picozero import DigitalInputDevice  
  
line = DigitalInputDevice(22, pull_up=False)  
  
on_line = line.is_active
```

Turn the blue adjuster until the module's output changes cleanly at the edge of the line.


Wiring

RASPBERRY PI 5

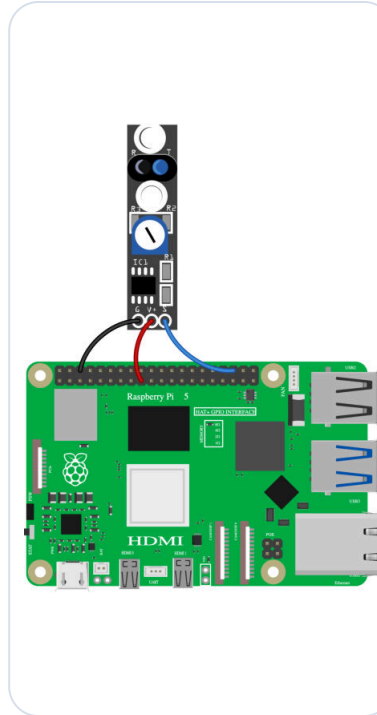

GND → GND, **3V3** → V+, **GPIO 16** → S

PICO

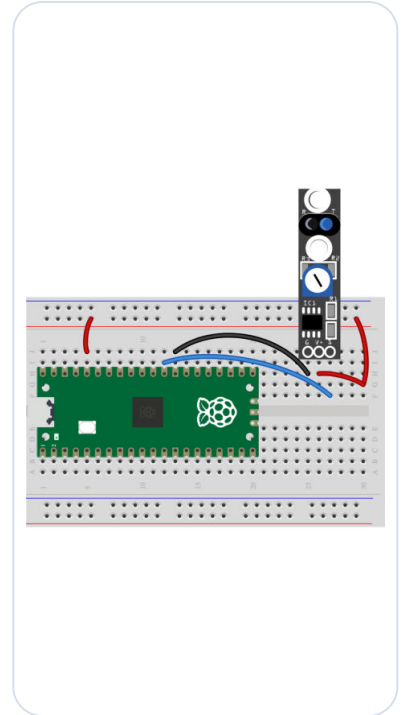

GND → GND, **3V3 OUT** → V+, **GP22** → S