

Temperature sensor

DETECT

INPUT

ANALOGUE

What does it do?

A TMP36 turns temperature into a changing voltage that a program can measure.

Its output rises by 10 millivolts for every degree Celsius, with 0.5 V representing 0 °C.

The Pico reads that voltage directly; the Raspberry Pi uses an MCP3008 analogue-to-digital converter.

Uses



Refrigerator cooling

DETECT
Measure
fridge
temperature

DECIDE
Is it too warm

DO
Increase the
cooling




Soup drama meter

DETECT
Measure bowl
surface

DECIDE
Pick a drama
level

DO
Move the
drama pointer

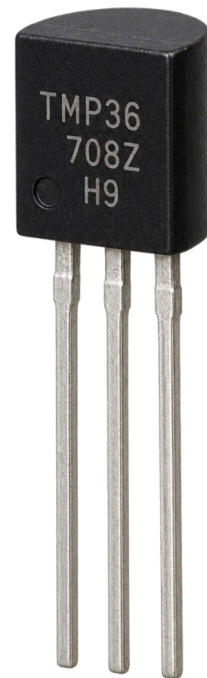

**Flat
face**

Use it to
identify
the pins

+Vs

Left pin

Vout

Centre pin

GND

Right pin

Code

● Raspberry Pi

```
from gpiozero import MCP3008

sensor = MCP3008(channel=0)

temperature = (sensor.voltage - 0.5) * 100
```

● Raspberry Pi Pico

```
from picozero import TemperatureSensor


convert = lambda voltage: (voltage - 0.5) * 100
sensor = TemperatureSensor(26, conversion=convert)

temperature = sensor.temp
```

Read the TMP36 with its flat face towards you; the pins are +Vs, Vout, GND from left to right.


Wiring

RASPBERRY PI 5

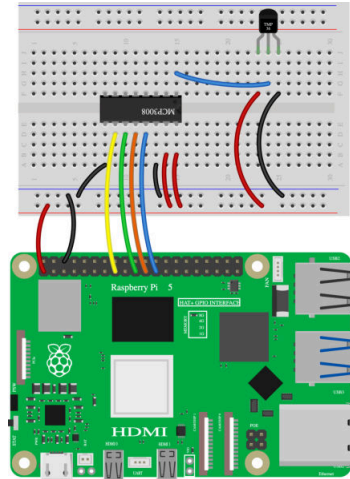

TMP36 **Vout** → MCP3008 **CH0**; ADC SPI uses GPIO **22, 10, 9, 11**

PICO

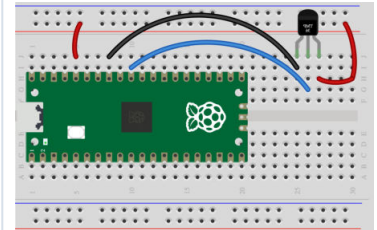

TMP36 **+Vs** → 3V3 OUT, **Vout** → GP26, **GND** → GND