

Designed by Remus Teodorescu 2026

LECTURE 10.2

Solid Oxide Cells


Remus Teodorescu

With support from Research Assistant Noman Khan - nomank@energy.aau.dk

Aalborg University · ret@et.aau.dk

Deep Learning for Engineering · 2026

STEAM · VOLTAGE · LIFETIME

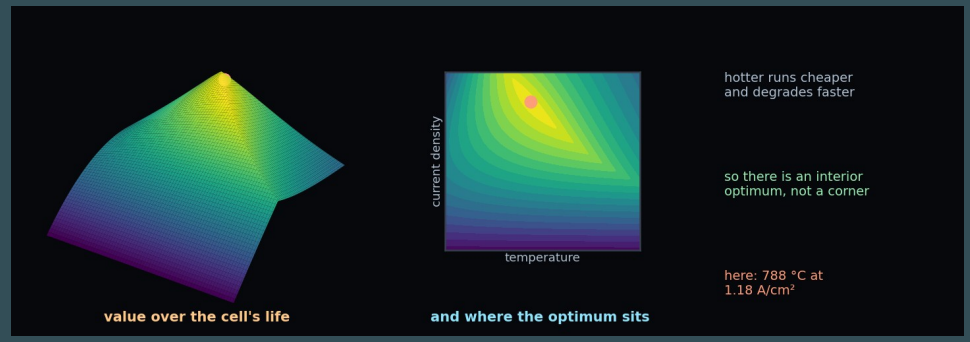

Schematic: the value a cell produces over its lifetime against temperature and current, with its best point in the interior - hotter is cheaper per hour and ages faster. The lecture sets out the electrolyser and the thermoneutral voltage, solves the fuel channel, and finds the best voltage by a gradient through one PINN trained over the whole range of voltages.

Learning Objectives

SECTIONS, IN ORDER

1. **The cell** — three electrolysers, the losses, the thermoneutral voltage

2. **The channel** — steam running short, a current that follows the voltage

3. **The best voltage** — one PINN for every voltage, the worth and its gradient

Incropera carries the transport, Liu the optimisation through a network. The example is Ex_10.2's electrolysis cell: the channel of L9.2, now with its electrode. This is the last physics lecture, and the place Part 2 has been heading.

READ, AND WHAT EACH ANSWERS

Incropera ch. 1	where do the losses sit?
Incropera ch. 14	how does the steam run short?
Liu ch. 5	what does a gradient buy?

Three Electrolysers

Water electrolyser — a cell that splits water into hydrogen and oxygen with electricity. The three industrial types differ in their electrolyte, and so in the ion that carries the charge and in the temperature at which they run.

ONE ELECTROLYTE EACH

alkaline — a potassium hydroxide solution near 80 degrees; OH^- carries the charge and a diaphragm keeps the gases apart

PEM — a humid polymer membrane near 70 degrees; H^+ crosses to the hydrogen side and liquid water is split at the oxygen side

solid oxide — a ceramic near 800 degrees; O^{2-} crosses to the air side, steam is split and heat supplies part of the energy

COST AND CONTROLLABILITY

	alkaline	PEM	solid oxide
temperature [°C]	70 – 90	50 – 80	700 – 850
energy [kWh/kg H_2]	50 – 78	50 – 83	45 – 55
cost [USD/kW]	500 – 1000	700 – 1400	stack >2000
minimum load [%]	10 – 30	10 – 40	about 50
ramp [% per s]	0.5 – 5	3 – 10	about 0.2
start from cold	minutes	minutes	hours: kept hot

Typical values, rounded. The costs are IRENA's 2020 system prices; installed plants cost more: 2000 – 2600 USD/kW outside China in 2024, 600 – 1200 USD/kW in China (IEA, 2025).

IRENA (2020); Dorn et al. (2026); IEA (2025)

Electrolysis at Industrial Scale

Power-to-X — the conversion of renewable electricity into hydrogen by electrolysis, and of the hydrogen into a fuel or chemical, such as methanol, that can be stored and shipped.

KASSØ, DENMARK, SINCE 2025

electrolysers	52 MW of PEM, from Siemens Energy
power	a 304 MW solar park beside the plant
product	up to 42 000 t of e-methanol a year

INSTALLED WORLDWIDE, AND 2030

installed	0.6 GW in 2021, 2 GW in 2024, 4.2 GW in 2025
by technology	in 2022: alkaline 60 %, PEM 30 %, SOEC under 1 %
by 2030	26 GW committed; 520 GW announced, much now out of reach
China	65 % of the capacity installed or committed



Laura Mærsk, e-methanol fuel
Jens Dohrn, CC BY-SA 4.0



2 MW PEM module, ITM Power
Bubble60, CC BY-SA 4.0

WHY ALKALINE STILL LEADS

mature	a century in industry
cheap	no noble metals, large stacks
China's makers	alkaline at 600 – 1200 USD/kW

Elsewhere 2000 – 2600 USD/kW (IEA). More: Kassø, ITM Power.

The Solid Oxide Electrolyser

Solid oxide electrolysis cell — a ceramic electrochemical cell that splits steam into hydrogen and oxygen near 800 degrees. The name comes from its electrolyte, a solid oxide (yttria-stabilised zirconia) that conducts only O^{2-} ions. In reverse it is a solid oxide fuel cell; the electrodes are therefore the fuel and air electrode, as anode and cathode swap between modes.


WHY THE HIGH TEMPERATURE PAYS

$$\Delta H = \Delta G + T\Delta S, \qquad \Delta G \downarrow \text{ as } T \uparrow$$

ΔH the energy to split water, ΔG the part that must be electricity, $T\Delta S$ the part heat can supply

THE THREE LAYERS

fuel electrode	steam takes two electrons, hydrogen leaves
electrolyte	carries O^{2-}, keeps the gases apart
air electrode	O^{2-} gives up its electrons as oxygen

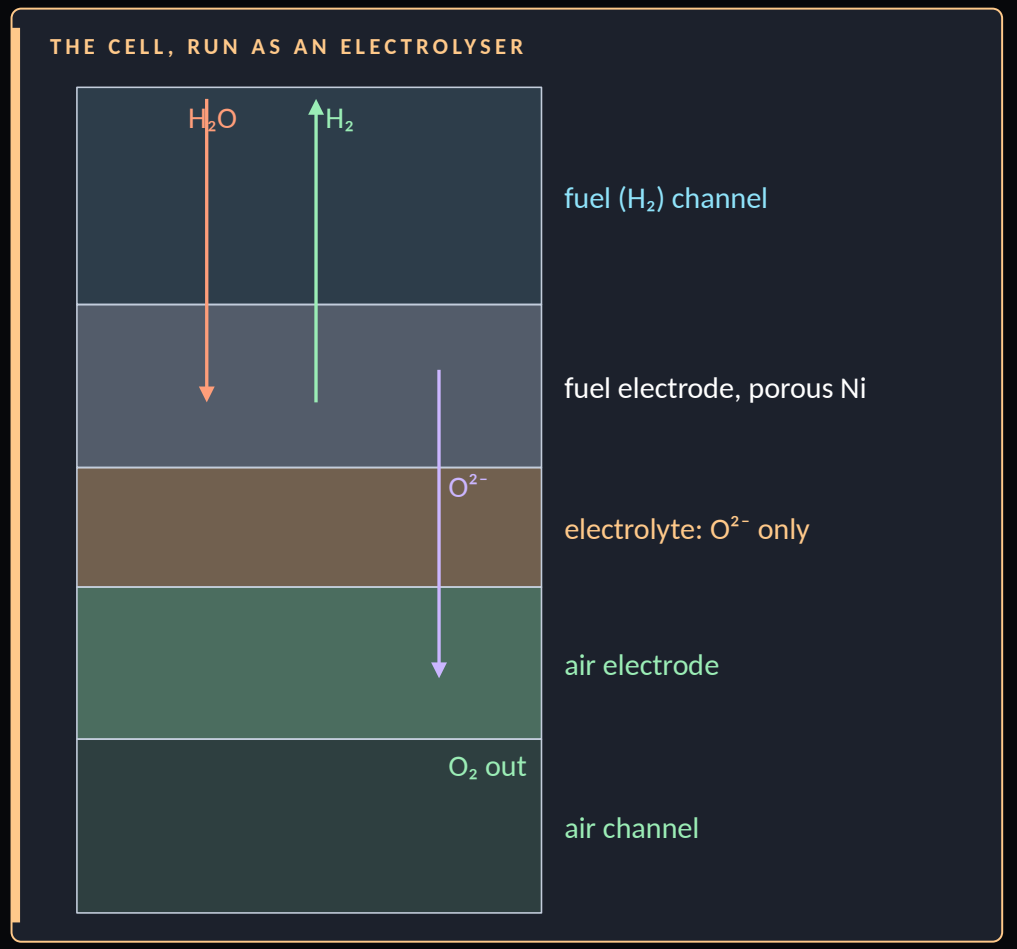

The Polarisation Curve

Nernst potential — the cell voltage at which no current flows, the reversible voltage of the reaction at the local gas composition; it rises as the steam is used up. The polarisation curve is this potential plus the losses, which grow with the current density.

THE NERNST POTENTIAL, AND THE LOSSES ON TOP

$$E = E^0(T) + \frac{RT}{2F}\ln\left(\frac{(1-y)\,p_{O_2}^{1/2}}{y}\right)$$


$$V = E + \eta_{act} + \eta_{ohm} + \eta_{conc}$$

E the Nernst potential, y the steam fraction, p_{O_2} the air side's oxygen, V the cell voltage $\eta_{act}, \eta_{ohm}, \eta_{conc}$ the activation, ohmic and gas-transport losses; in electrolysis they add

The exercise gathers all three losses into one area-specific resistance, 0.25 Ω cm², an estimate that stands for the curve at its operating point.

THREE CELLS, ENERGY PER KILOGRAM

SCHEMATIC, TYPICAL VALUES

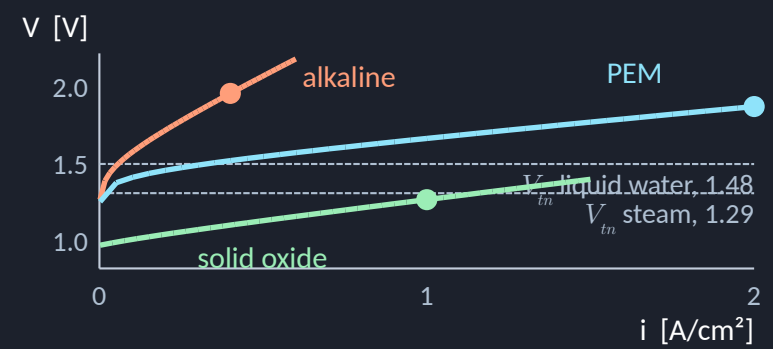

alkaline	1.94 V at 0.4 A/cm²: 52 kWh/kg
PEM	1.85 V at 2.0 A/cm²: 49 kWh/kg
solid oxide	1.25 V at 1.0 A/cm²: 33 kWh/kg

26.6 kWh/kg per volt; solid oxide also needs steam heat.

The Thermoneutral Voltage

Thermoneutral voltage — the operating voltage at which the heat the losses release equals the heat the reaction absorbs, so the net heat is zero and the temperature stays even. For steam near 800 degrees it is 1.29 volts, and stacks are designed at or just above it.

THE BALANCE, AND THE HEAT IN ONE TERM


$$V_{tn} = \frac{\Delta H}{2F} = 1.29\ \text{V} \quad (\text{steam},\ 800\ ^\circ\text{C})$$

$$q = i(V - V_{tn})$$

V_{tn} the thermoneutral voltage, ΔH the enthalpy of splitting, q the heat per electrode area, i the current density

TALK · 2 MIN How would you explain, in your own words, where the heat of an electrolyser comes from and where it goes? Then, in the drawing on the right, why do the two cold cells reject heat while the solid oxide cell runs at its dashed line?

THREE CELLS ON ONE VOLTAGE AXIS

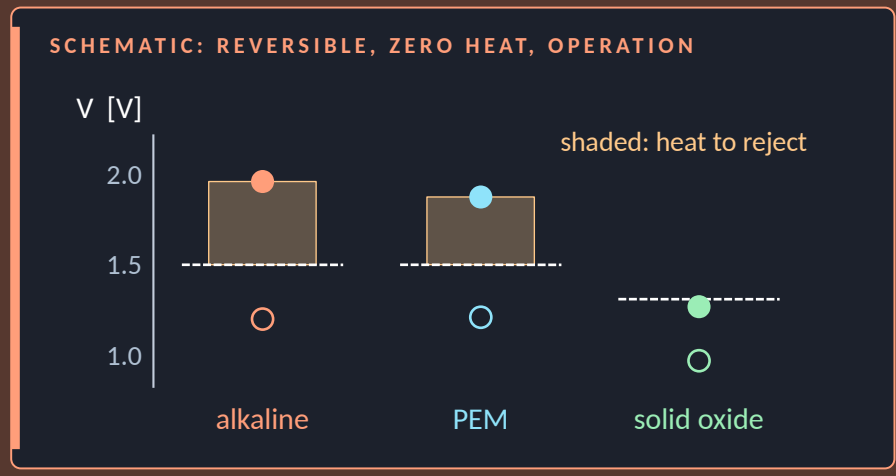

alkaline, PEM 0.4 – 0.5 V above: heat to remove

solid oxide at V_{tn}: no net heat in the stack

Liquid water: 1.48 V includes evaporation. Steam at 800 °C: 1.29 V, the steam raised outside.

The Fuel Channel


Fuel channel — the hydrogen channel of L9.2, run as an electrolyser: 90 % steam enters at 1 m/s, the electrode takes steam and returns hydrogen, and the steam fraction falls along the channel. The flow is the same known Poiseuille; what changes is the source, which is no longer a given flux.

THE SCALED EQUATION OF EX_10.2


$$y_x = \frac{y_{xx}}{Pe} - K(V - E(y)), \qquad Pe = 125, \quad K = 1.83\ \mathrm{V}^{-1}$$

y the steam fraction, x along the channel over L, Pe the Péclet number, K gathers L, u, h, c, F, ASR

STEAM TAKEN, HYDROGEN RETURNED

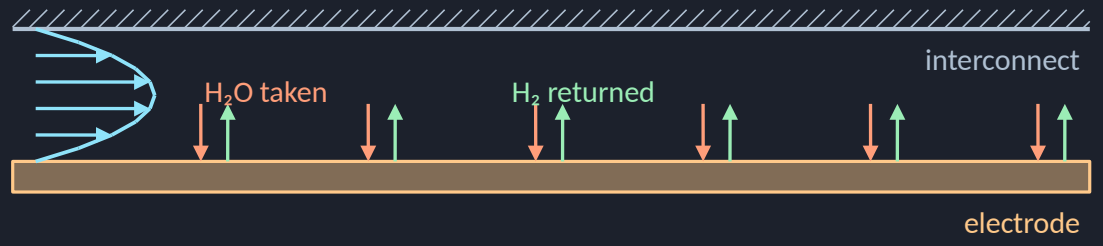

STEAM ALONG THE CHANNEL

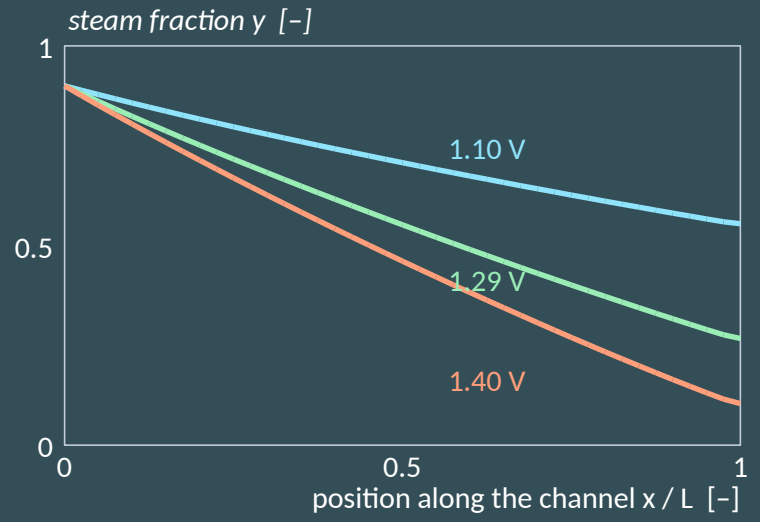

At 1.29 V the outlet steam fraction is 0.27: 69 % of the steam is used. In alkaline and PEM cells liquid water flows in large excess and cannot run short; their channels carry the gas bubbles away instead.

The Local Current

Local current density — the current per electrode area at one point of the channel. The whole cell is held at one voltage V; the local gas sets the local Nernst potential $E(y)$, and their difference over the area-specific resistance is the local current density.

ONE VOLTAGE, A CURRENT THAT VARIES


$$i(y) = \frac{V - E(y)}{ASR}$$

i the local current density, *E*(*y*) the Nernst potential of the local gas, *ASR* all losses as one area resistance (an estimate)

WHY IT FALLS, AND WHAT IT MEANS

1 · steam used	the steam fraction y falls along the channel
2 · E rises	the Nernst potential grows as y falls
3 · gap shrinks	V - E, and so i, fall toward the outlet
→ hydrogen	the outlet half makes the smaller share
→ heat	uneven current, uneven heat, thermal stress

THE CURRENT ALONG THE CHANNEL

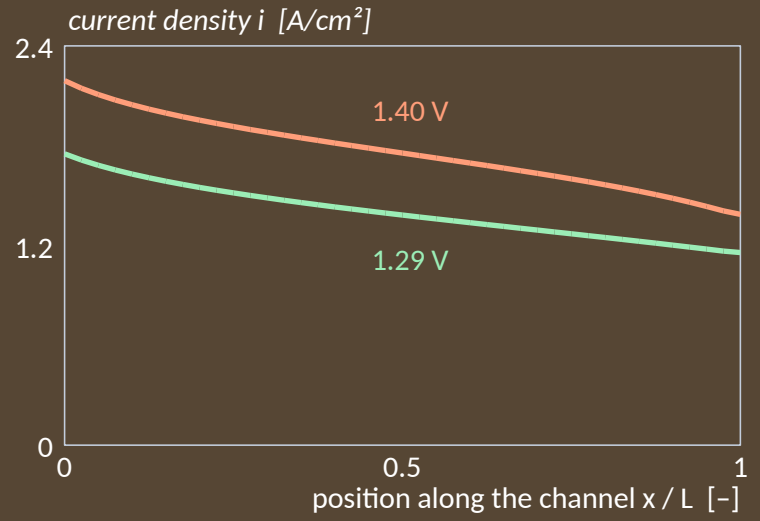

Highest at the inlet, where the steam is fresh. Near the outlet at 1.40 V the steam runs short and the gas-transport loss rises steeply. Alkaline and PEM cells, fed water in excess, see a nearly even current.

One PINN for Every Voltage

Parametric PINN — a physics-informed network that takes the cell voltage V as an input beside the position x. One offline training over 1.10 to 1.40 V gives the steam fraction for every voltage in that range, each read off by one evaluation instead of a new solution.

THE TRIAL FUNCTION, AND THE LOSS

$$\hat{y}(x, V) = y_{in} + x\,\mathcal{N}(x, V)$$

$$\mathcal{L}(\theta) = \frac{1}{N}\sum_{k=1}^{N} r_k^2 + \lambda\,\overline{\hat{y}_x(1, V)^2}, \qquad r = \hat{y}_x - \frac{\hat{y}_{xx}}{Pe} + K(V - E(\hat{y}))$$

θ the network's weights, r the residual at N collocation points (x, V), λ the weight of the zero outlet slope $y_{in} = 0.90$ the inlet, built in, $\mathcal{N}$ the network : x and the cell voltage V in, trained over 1.10 to 1.40 V

THE TRIAL FUNCTION IN PYTORCH

```
y = Y_IN + x * net(p)              # trial function, p = (x, V)
g = grad(y, p)                     # derivatives by autograd
loss = (r**2).mean() + LAM*out**2  # residual, outlet slope at 0
```

FVM AGAINST PINN AT 1.29 V

	FVM, 50 cells	PINN
worst error	0.0042	0.0005
one solution	2 ms	under 1 ms
a new voltage	solve again	read off
dC/dV	by finite steps	by autograd
training, offline	none	20 s

WHY A PINN HERE

the task the steam for every voltage

FVM one solve per voltage

PINN any voltage, and its gradient

FVM, finite volume method: 50 cells, steam balanced in each.

Optimisation of the Cell Voltage

Cost function — the number the operator minimises: the cost of the electricity bought less the value of the hydrogen sold, per hour, as a function of the cell voltage V. The prices are assumptions, 3 euro per kg and 0.065 euro per kWh, so the optimum is conditional on them.

THE COST, AND ITS MINIMUM THROUGH THE PINN

$$C(V) = p_{el}\,(V - V_h)\,I(V), \qquad V_h = \frac{p_{H_2} M_{H_2}}{2F\,p_{el}} = 1.74\ \text{V}$$


$$I(V) = A \int_0^1 \frac{V - E(\hat{y}(x, V))}{ASR}\,dx, \qquad V^* = \arg\min_V C(V)$$

C the cost of an hour (negative : a profit), p_{el}, p_{H_2} the prices (assumptions), V_h where hydrogen pays the electricity
I the total current, A the electrode area, $\hat{y}$ the PINN's steam fraction, V^* the best voltage

THE BEST VOLTAGE IN PYTORCH

```
V = torch.tensor([1.25], requires_grad=True)  # the decision variable
C = cost(net, V)                 # steam from the PINN, current, then the cost
V = V - lr * grad(C, V)[0]       # downhill, through the network: 200 steps
```

THE COST AGAINST THE VOLTAGE

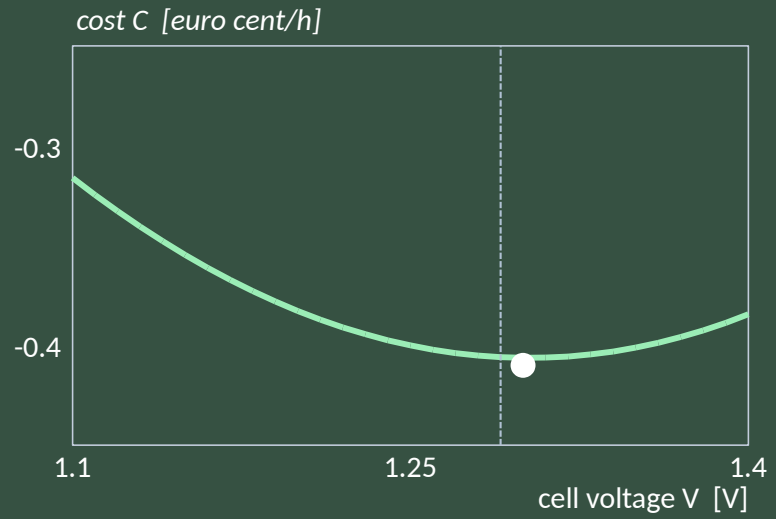

by the gradient	1.30 V, 200 steps, 0.2 s
by 61 solver runs	1.30 V, 4 s

No Best Point Over a Lifetime

Degradation — the slow rise of the cell's resistance: nickel coarsens, interfaces delaminate, chromium poisons the air electrode. The rate is Arrhenius in T and a power of i, so what produces more now ages faster - and published rates span an order of magnitude.

THE DEGRADATION LAW, AND THE LIFETIME OBJECTIVE


$$\frac{dASR}{dt} = k_0 \exp\left(-\frac{E_d}{RT}\right) |i|^n$$

$$\max_{V(t),\,T(t)} \int_0^{t_{life}} [p_{H_2}\dot{m}_{H_2} - p_{el}P]dt \quad \text{s.t.} \quad ASR(t_{life}) \le ASR_{\max}, \quad |\nabla T| \le |\nabla T|_{\max}$$

k_0, E_d, n the degradation law's constants : Arrhenius in T, a power of i; published rates span an order of magnitude

TALK · 2 MIN How would you explain, in your own words, why a device like this has no best operating point? Then, in the drawing on the right, what moves the white dot when the price of electricity falls?

THE TRADE, DRAWN

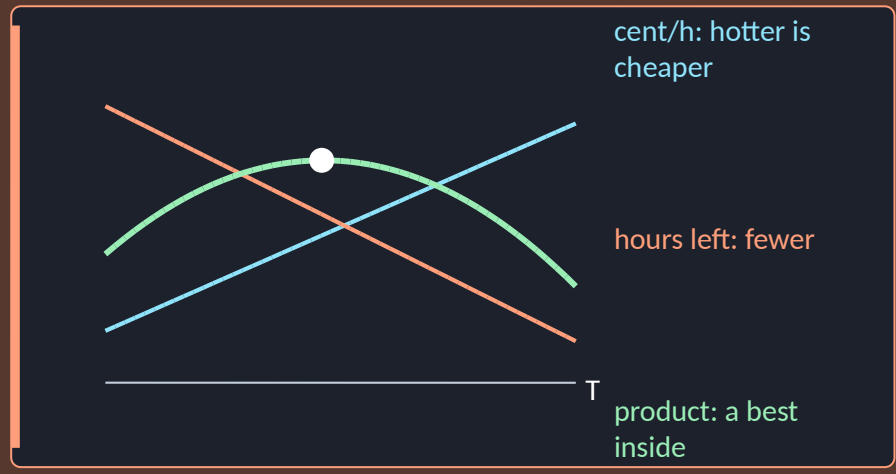

so the answer a trajectory $V(t), T(t)$

held back by lifetime, and $|\nabla T|$: ceramic

Operating for Cost and Lifetime

Operating strategy — the cell voltage $V(t)$ and temperature $T(t)$ chosen over the life of the stack to minimise the cost of each kilogram of hydrogen: the electricity bought hour by hour, and the stack replaced when its resistance reaches the end-of-life limit.

THE LEVELISED COST OF HYDROGEN

$$\mathrm{LCOH} = \frac{C_{stack} + \sum_t p_{el}(t)\, P(t)\, \Delta t}{\sum_t \dot{m}_{H_2}(t)\, \Delta t} \quad \text{over the stack's life}$$

LCOH the cost of a kilogram of hydrogen, C_{stack} the stack, replaced at end of life, $p_{el}(t)$ the hourly price $P(t)$, $\dot{m}_{H_2}(t)$ power and hydrogen at the chosen $V(t), T(t)$; the life ends when ASR reaches $ASR_{\max}$

THE TRADE-OFFS

higher voltage	more hydrogen per hour, faster ageing
higher temperature	lower resistance, faster ageing
cheap hours	run harder when the price is low
near V_{tn}	small heat, small gradients in the ceramic

WHAT THE PINN ADDS

one hour	the cost in a millisecond
gradient	dC/dV and dC/dT by autograd
a solver	one solve per variable per step
a lifetime	an optimiser over $V(t), T(t)$
Ex_10.2	0.2 s against 4 s of sweeps

```
C = lcoh(net, V_t, T_t)           # cost over a life
V_t = V_t - lr * grad(C, V_t)[0]  # schedule, downhill
```

Degradation rates are uncertain tenfold: a predicted lifetime ranks strategies, it is not a promise.

Advanced Topics

RELATED TOPICS LEFT OUT, AND WHERE THEY MATTER

topic	what it adds	read	where it makes a difference
channel temperature	the cell cools below V_{tn}	Incropera ch. 5	stacks; MP10.2A
degradation law	k_0, E_d, n fitted to drifts	Liu ch. 5	lifetime; MP10.2B
button-cell fit	kinetics from measured curves	Incropera ch. 1	validation
daily schedule	the hourly price as driver	Liu ch. 5	grid operation; L12
steam supply	outlet gas heat raises the steam	Incropera ch. 11	plant efficiency

WHY THEY ARE LEFT OUT


Ex_10.2 solves one isothermal channel at one moment, scored against a boundary-value solver, so none of them is needed to do it. The first two rows are the two mini projects; the last two are where the schedule meets the grid of L12.

EXERCISE

Exercise 10.2

ONE NOTEBOOK, SECTION BY SECTION

- **1 – 3** — the electrolyser, its channel, the Nernst potential and K
- **4** — the boundary-value reference; finite volumes with Newton
- **5** — one PINN for every voltage from 1.10 to 1.40 V
- **6** — the best cell voltage, by a gradient through the network
- **7 – 9** — the report; mini projects MP10.2A and MP10.2B

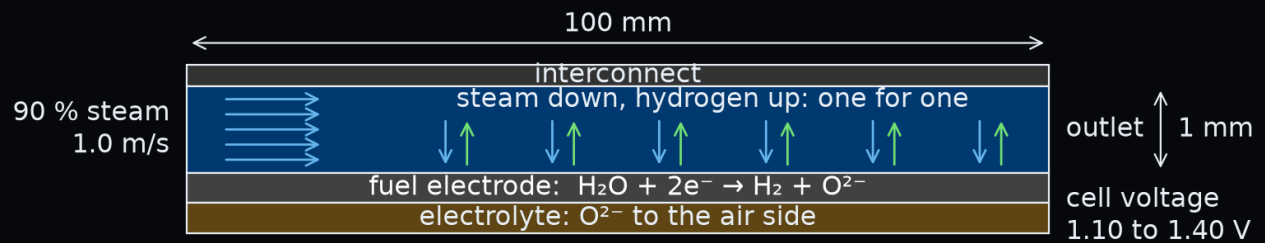

THE QUESTION EACH PART ANSWERS

1 – 3	what sets the local current?
4	how fine must the grid be?
5	one network, every voltage?
6	which voltage pays best?

REPORT QUESTION, TO CONCLUDE

The ASR, the diffusivity and the prices are the notebook's estimates, and two students with different price ratios should find different best voltages. What in your answer is physics, and what is an assumption?

SUMMARY

Key Takeaways

SOLID OXIDE CELL

what it is	a ceramic cell, two directions
function	steam to hydrogen, heat helping
train, tune	run at or just above V_{tn}
vs low temperature	a quarter less electricity
used for	storing surplus power as fuel

LIFETIME OPTIMISATION

what it is	a PINN with the voltage as input
function	the cost, and its gradient
train, tune	once, over 1.10 to 1.40 V
vs a solver	the gradient comes free
used for	a trajectory, not a setting

Next — L11.1: a network in a real-time loop, where there is no PDE at all.

Questions

1 – 2 · A NETWORK FOR THE FUEL CHANNEL

1 **How can a network learn the steam fraction along the channel of the cell for every cell voltage?**

The network takes the position along the channel and the cell voltage, and is trained over 1.10 to 1.40 V until the species equation holds at points along the channel, with the local current set by the gap between the cell voltage and the local Nernst potential. The steam fraction at the inlet is built into the form of the solution, and the zero slope at the outlet is held by a loss term. After one training, any voltage in the range is read off, not solved again. *Liu ch. 2.2; Ex_10.2 section 5*

2 **Why does the local current make the fuel channel harder to solve, and how is the network's answer checked?**

The flux at the electrode is no longer given: the current at each point follows the local steam fraction, so the equation is nonlinear in it and needs a condition at the outlet, and it can no longer be marched from the inlet. The network takes the nonlinear term into its residual with no change of method. Its answer is scored against a boundary-value solver at a tight tolerance: at 1.29 V within 0.0005 of the steam fraction, where finite volumes on 50 cells are within 0.0042. *Ex_10.2 sections 3 – 5*

3 – 4 · THE BEST VOLTAGE

3 **How can the best cell voltage be found with a network, and what does the gradient save?**

The worth of an hour, the hydrogen made at its price less the electricity used at its price, is computed from the network's steam fraction and current. With the voltage as an input, automatic differentiation gives the derivative of the worth with respect to it, and gradient ascent finds 1.30 V in 200 steps and 0.2 s; a sweep of 61 runs of the reference solver finds the same voltage in 4 s. The prices are assumptions, so the voltage found is conditional on them. *Liu ch. 5; Ex_10.2 section 6*

4 **Why does a network help to optimise the operation of the cell over its lifetime, and what should not be claimed from it?**

Over a lifetime the decision is a trajectory of the voltage and the temperature, because what produces more now ages the cell faster. A solver gives the worth, but its gradient costs one solve per variable per step, or an adjoint built by hand; a trained network gives the gradient with respect to every input by automatic differentiation. Degradation rates are uncertain by an order of magnitude, so a predicted lifetime ranks schedules; it is not a number to promise. *Liu ch. 5*

NEXT

L11.1 — Vision-Based Navigation

A network in a real-time control loop on a robot car, where the model is learned from camera frames and there is no PDE at all.

BEFORE THE NEXT SESSION

read	Liu ch. 5
run	Ex_10.2, sections 1 to 6
bring	your best voltage, and its worth
think about	what was physics, what was price

Block ten is finished: lithium in a particle, and steam in a ceramic cell - the course's last partial differential equations.