



Swift Navigation Binary Protocol

Protocol Specification 3.2.0

Contents

| | | |
|----------|--|------------|
| 1 | Overview | 1 |
| 2 | Message Framing Structure | 2 |
| 3 | NMEA-0183 | 2 |
| 4 | Basic Formats and Payload Structure | 3 |
| 5 | Message Types | 4 |
| 6 | Stable Message Definitions | 8 |
| 6.1 | Ext Events | 8 |
| 6.2 | Imu | 9 |
| 6.3 | Logging | 11 |
| 6.4 | Mag | 13 |
| 6.5 | Navigation | 14 |
| 6.6 | Observation | 37 |
| 6.7 | Settings | 87 |
| 6.8 | Solution Meta | 95 |
| 6.9 | System | 100 |
| 7 | Draft Message Definitions | 108 |
| 7.1 | Acquisition | 108 |
| 7.2 | File IO | 110 |
| 7.3 | Linux | 119 |
| 7.4 | Orientation | 127 |
| 7.5 | Piksi | 131 |
| 7.6 | Sbas | 154 |
| 7.7 | Ssr | 155 |
| 7.8 | Tracking | 168 |
| 7.9 | User | 172 |
| 7.10 | Vehicle | 173 |

1 Overview

The Swift Navigation Binary Protocol (SBP) is a fast, simple, and minimal binary protocol for communicating with Swift devices. It is the native binary protocol used by the Piksi GPS receiver to transmit solutions, observations, status, and debugging messages, as well as receive messages from the host operating system, such as differential corrections and the almanac. As such, it is an important interface with your Piksi receiver and the primary integration method with other systems.

This document provides a specification of SBP framing and the payload structures of the messages currently used with Swift devices. SBP client libraries in a variety of programming languages are available at <https://github.com/swift-nav/libsbp> and support information for sbp is available at <https://support.swiftnav.com/customer/en/portal/articles/2492810-swift-binary-protocol>.

2 Message Framing Structure

SBP consists of two pieces:

- an over-the-wire message framing format
- structured payload definitions

As of Version 3.2.0, the frame consists of a 6-byte binary header section, a variable-sized payload field, and a 16-bit CRC value. All multibyte values are ordered in **little-endian** format. SBP uses the CCITT CRC16 (XMODEM implementation) for error detection¹.

| Offset (bytes) | Size (bytes) | Name | Description |
|----------------|--------------|--------------------|--|
| 0 | 1 | Preamble | Denotes the start of frame transmission. Always 0x55. |
| 1 | 2 | Message Type | Identifies the payload contents. |
| 3 | 2 | Sender | A unique identifier of the sender. On the Piksi, this is set to the 2 least significant bytes of the device serial number. A stream of SBP messages may also include sender IDs for forwarded messages. By default, clients of 'libsbp' use a sender id value of '0x42'. Sender id '0x42' is used to represent device controllers such as the Piksi Console. |
| 5 | 1 | Length | Length (bytes) of the Payload field. |
| 6 | <i>N</i> | Payload | Binary message contents. |
| <i>N</i> + 6 | 2 | CRC | Cyclic Redundancy Check of the frame's binary data from the Message Type up to the end of Payload (does not include the Preamble). |
| <i>N</i> + 8 | | Total Frame Length | |

Table 2.0.1: Swift Binary Protocol message structure. *N* denotes a variable-length size.

3 NMEA-0183

Swift devices, such as the Piksi, also have limited support for the standard NMEA-0183 protocol.

Note that NMEA-0183 doesn't define standardized message string equivalents for many important SBP messages such as observations, baselines and ephemerides. For this reason it is strongly recommended to use SBP for new development. NMEA-0183 output is provided primarily to support legacy devices.

¹CCITT 16-bit CRC Implementation uses parameters used by XMODEM, i.e. the polynomial: $x^{16} + x^{12} + x^5 + 1$. For more details, please see the implementation at <https://github.com/swift-nav/libsbp/blob/master/c/src/edc.c#L59>. See also *A Painless Guide to CRC Error Detection Algorithms* at http://www.ross.net/crc/download/crc_v3.txt

4 Basic Formats and Payload Structure

The binary payload of an SBP message decodes into structured data based on the message type defined in the header. SBP uses several primitive numerical and collection types for defining payload contents.

| Name | Size (bytes) | Description |
|----------|--------------|---|
| s8 | 1 | Signed 8-bit integer |
| s16 | 2 | Signed 16-bit integer |
| s32 | 4 | Signed 32-bit integer |
| s64 | 8 | Signed 64-bit integer |
| u8 | 1 | Unsigned 8-bit integer |
| u16 | 2 | Unsigned 16-bit integer |
| u32 | 4 | Unsigned 32-bit integer |
| u64 | 8 | Unsigned 64-bit integer |
| float | 4 | Single-precision float (IEEE-754) |
| double | 8 | Double-precision float (IEEE-754) |
| array | — | Fixed or variable length array of any fill type |
| string | — | Fixed or variable length string (NULL padded/terminated) |
| bitfield | — | A primitive type, typically a u8, can encode boolean and enumerated status flags. |

Table 4.0.1: SBP primitive types

Example Message

As an example, consider this framed series of bytes read from a serial port:

55 02 02 cc 04 14 70 3d d0 18 cf ef ff ff ef e8 ff ff f0 18 00 00 00 05 00 43 94

This byte array decodes into a `MSG_BASELINE_ECEF` (see pg. 17), which reports the baseline position solution of the rover receiver relative to the base station receiver in Earth Centered Earth Fixed (ECEF) coordinates. The segments of this byte array and its contents break down as follows:

| Field Name | Type | Value | Bytestring Segment |
|--------------------------------|------|--------------------------------|---|
| Preamble | u8 | 0x55 | 55 |
| Message Type | u16 | <code>MSG_BASELINE_ECEF</code> | 02 02 |
| Sender | u16 | 1228 | cc 04 |
| Length | u8 | 20 | 14 |
| Payload | — | — | 70 3d d0 18 cf ef ff ff ef e8 ff ff f0 18 00 00 00 05 00 |
| <code>MSG_BASELINE_ECEF</code> | | | |
| .tow | u32 | 416300400 msec | 70 3d d0 18 |
| .x | s32 | −4145 mm | cf ef ff ff |
| .y | s32 | −5905 mm | ef e8 ff ff |
| .z | s32 | 6384 mm | f0 18 00 00 |
| .accuracy | u16 | 0 | 00 00 |
| .nsats | u8 | 5 | 05 |
| .flags | u8 | 0 | 00 |
| CRC | u16 | 0x9443 | 43 94 |

Table 4.0.2: SBP breakdown for `MSG_BASELINE_ECEF`

5 Message Types

Packages define a logical collection of SBP messages. The contents and layout of messages in packages marked **stable** are unlikely to change in the future. **Draft** messages *will change with future development* and are detailed purely for *informational purposes only*. Many draft messages are implementation-defined, and some collections, such as the acquisition package, are used for internal development.

| Package | Msg ID | Name | Size (bytes) | Description |
|---------------|--------|--------------------------|--------------|---|
| Stable | | | | |
| Ext Events | 0x0101 | MSG_EXT_EVENT | 12 | Reports timestamped external pin event |
| Imu | 0x0900 | MSG_IMU_RAW | 17 | Raw IMU data |
| | 0x0901 | MSG_IMU_AUX | 4 | Auxiliary IMU data |
| Logging | 0x0401 | MSG_LOG | $N + 1$ | Plaintext logging messages with levels |
| | 0x0402 | MSG_FWD | $N + 2$ | Wrapper for FWD a separate stream of information over SBP |
| Mag | 0x0902 | MSG_MAG_RAW | 11 | Raw magnetometer data |
| Navigation | 0x0102 | MSG_GPS_TIME | 11 | GPS Time |
| | 0x0103 | MSG_UTC_TIME | 16 | UTC Time |
| | 0x0208 | MSG_DOPS | 15 | Dilution of Precision |
| | 0x0209 | MSG_POS_ECEF | 32 | Single-point position in ECEF |
| | 0x0214 | MSG_POS_ECEF_COV | 54 | Single-point position in ECEF |
| | 0x020A | MSG_POS_LLH | 34 | Geodetic Position |
| | 0x0211 | MSG_POS_LLH_COV | 54 | Geodetic Position |
| | 0x020B | MSG_BASELINE_ECEF | 20 | Baseline Position in ECEF |
| | 0x020C | MSG_BASELINE_NED | 22 | Baseline in NED |
| | 0x020D | MSG_VEL_ECEF | 20 | Velocity in ECEF |
| | 0x0215 | MSG_VEL_ECEF_COV | 42 | Velocity in ECEF |
| | 0x020E | MSG_VEL_NED | 22 | Velocity in NED |
| | 0x0212 | MSG_VEL_NED_COV | 42 | Velocity in NED |
| | 0x0229 | MSG_POS_ECEF_GNSS | 32 | GNSS-only Position in ECEF |
| | 0x0234 | MSG_POS_ECEF_COV_GNSS | 54 | GNSS-only Position in ECEF |
| | 0x022A | MSG_POS_LLH_GNSS | 34 | GNSS-only Geodetic Position |
| | 0x0231 | MSG_POS_LLH_COV_GNSS | 54 | GNSS-only Geodetic Position |
| | 0x022D | MSG_VEL_ECEF_GNSS | 20 | GNSS-only Velocity in ECEF |
| | 0x0235 | MSG_VEL_ECEF_COV_GNSS | 42 | GNSS-only Velocity in ECEF |
| | 0x022E | MSG_VEL_NED_GNSS | 22 | GNSS-only Velocity in NED |
| | 0x0232 | MSG_VEL_NED_COV_GNSS | 42 | GNSS-only Velocity in NED |
| | 0x0213 | MSG_VEL_BODY | 42 | Velocity in User Frame |
| | 0x0210 | MSG_AGE_CORRECTIONS | 6 | Age of corrections |
| Observation | 0x004A | MSG_OBS | $17N + 11$ | GPS satellite observations |
| | 0x0044 | MSG_BASE_POS_LLH | 24 | Base station position |
| | 0x0048 | MSG_BASE_POS_ECEF | 24 | Base station position in ECEF |
| | 0x0081 | MSG_EPHEMERIS_GPS_DEP_E | 185 | Satellite broadcast ephemeris for GPS |
| | 0x0086 | MSG_EPHEMERIS_GPS_DEP_F | 183 | Deprecated |
| | 0x008A | MSG_EPHEMERIS_GPS | 139 | Satellite broadcast ephemeris for GPS |
| | 0x008E | MSG_EPHEMERIS_QZSS | 139 | Satellite broadcast ephemeris for QZSS |
| | 0x0089 | MSG_EPHEMERIS_BDS | 147 | Satellite broadcast ephemeris for BDS |
| | 0x0095 | MSG_EPHEMERIS_GAL_DEP_A | 152 | Deprecated |
| | 0x008D | MSG_EPHEMERIS_GAL | 153 | Satellite broadcast ephemeris for Galileo |
| | 0x0082 | MSG_EPHEMERIS_SBAS_DEP_A | 112 | Satellite broadcast ephemeris for SBAS |
| | 0x0083 | MSG_EPHEMERIS_GLO_DEP_A | 112 | Satellite broadcast ephemeris for GLO |

| | | | | |
|---------------|--------|---------------------------------|----------|---|
| | 0x0084 | MSG_EPHEMERIS_SBAS_DEP_B | 110 | Deprecated |
| | 0x008C | MSG_EPHEMERIS_SBAS | 74 | Satellite broadcast ephemeris for SBAS |
| | 0x0085 | MSG_EPHEMERIS_GLO_DEP_B | 110 | Satellite broadcast ephemeris for GLO |
| | 0x0087 | MSG_EPHEMERIS_GLO_DEP_C | 119 | Satellite broadcast ephemeris for GLO |
| | 0x0088 | MSG_EPHEMERIS_GLO_DEP_D | 120 | Deprecated |
| | 0x008B | MSG_EPHEMERIS_GLO | 92 | Satellite broadcast ephemeris for GLO |
| | 0x0090 | MSG_IONO | 70 | Ionospheric corrections |
| | 0x0091 | MSG_SV_CONFIGURATION_GPS_DEP | 10 | L2C capability mask |
| | 0x0096 | MSG_GNSS_CAPB | 110 | GNSS capabilities |
| | 0x0092 | MSG_GROUP_DELAY_DEP_A | 14 | Group Delay |
| | 0x0093 | MSG_GROUP_DELAY_DEP_B | 17 | Group Delay |
| | 0x0094 | MSG_GROUP_DELAY | 15 | Group Delay |
| | 0x0072 | MSG_ALMANAC_GPS | 94 | Satellite broadcast ephemeris for GPS |
| | 0x0073 | MSG_ALMANAC_GLO | 78 | Satellite broadcast ephemeris for GLO |
| | 0x0075 | MSG_GLO_BIASES | 9 | GLONASS L1/L2 Code-Phase biases |
| | 0x0097 | MSG_SV_AZ_EL | 4N | Satellite azimuths and elevations |
| | 0x0640 | MSG_OSR | 19N + 11 | OSR corrections |
| Settings | 0x00A1 | MSG_SETTINGS_SAVE | 0 | Save settings to flash |
| | 0x00A0 | MSG_SETTINGS_WRITE | N | Write device configuration settings |
| | 0x00AF | MSG_SETTINGS_WRITE_RESP | N + 1 | Acknowledgement with status of MSG_SETTINGS_WRITE |
| | 0x00A4 | MSG_SETTINGS_READ_REQ | N | Read device configuration settings |
| | 0x00A5 | MSG_SETTINGS_READ_RESP | N | Read device configuration settings |
| | 0x00A2 | MSG_SETTINGS_READ_BY_INDEX_REQ | 2 | Read setting by direct index |
| | 0x00A7 | MSG_SETTINGS_READ_BY_INDEX_RESP | N + 2 | Read setting by direct index |
| | 0x00A6 | MSG_SETTINGS_READ_BY_INDEX_DONE | 0 | Finished reading settings |
| Solution Meta | 0xFF0F | MSG_SOLN_META | 2N + 18 | Solution Sensors Metadata |
| | 0xFFE7 | GNSSInputType | 1 | Flags for a given GNSS sensor used as input for the fused solution. |
| | 0xFFE8 | IMUInputType | 1 | Flags for a given IMU sensor used as input for the fused solution. |
| | 0xFFE9 | OdoInputType | 1 | Flags for a given Odometry sensor used as input for the fused solution. |
| System | 0xFF00 | MSG_STARTUP | 4 | System start-up message |
| | 0xFF02 | MSG_DGNSS_STATUS | N + 4 | Status of received corrections |
| | 0xFFFF | MSG_HEARTBEAT | 4 | System heartbeat message |
| | 0xFF03 | MSG_INS_STATUS | 4 | Inertial Navigation System status message |
| | 0xFF07 | MSG_GNSS_TIME_OFFSET | 9 | Offset of the local time with respect to GNSS time |
| | 0xFF0A | MSG_GROUP_META | 2N + 11 | Solution Group Metadata |
| Draft | | | | |
| Acquisition | 0x002F | MSG_ACQ_RESULT | 14 | Satellite acquisition result |
| | 0x002E | MSG_ACQ_SV_PROFILE | 33N | Acquisition performance measurement and debug |
| File IO | 0x00A8 | MSG_FILEIO_READ_REQ | N + 9 | Read file from the file system |
| | 0x00A3 | MSG_FILEIO_READ_RESP | N + 4 | File read from the file system |
| | 0x00A9 | MSG_FILEIO_READ_DIR_REQ | N + 8 | List files in a directory |
| | 0x00AA | MSG_FILEIO_READ_DIR_RESP | N + 4 | Files listed in a directory |
| | 0x00AC | MSG_FILEIO_REMOVE | N | Delete a file from the file system |
| | 0x00AD | MSG_FILEIO_WRITE_REQ | N + 9 | Write to file |
| | 0x00AB | MSG_FILEIO_WRITE_RESP | 4 | File written to |
| | 0x1001 | MSG_FILEIO_CONFIG_REQ | 4 | Request advice on the optimal configuration for FileIO. |

| | | | | |
|-------------|--------|-----------------------------------|------------|---|
| | 0x1002 | MSG_FILEIO_CONFIG_RESP | 16 | Response with advice on the optimal configuration for FileIO. |
| Linux | 0x7F00 | MSG_LINUX_CPU_STATE | $N + 19$ | List CPU state on the system |
| | 0x7F01 | MSG_LINUX_MEM_STATE | $N + 19$ | List CPU state on the system |
| | 0x7F02 | MSG_LINUX_SYS_STATE | 10 | CPU, Memory and Process Starts/Stops |
| | 0x7F03 | MSG_LINUX_PROCESS_SOCKET_COUNTS | $N + 9$ | A list of processes with high socket counts |
| | 0x7F04 | MSG_LINUX_PROCESS_SOCKET_QUEUES | $N + 75$ | A list of processes with deep socket queues |
| | 0x7F05 | MSG_LINUX_SOCKET_USAGE | 72 | Summary of socket usage across the system |
| | 0x7F06 | MSG_LINUX_PROCESS_FD_COUNT | $N + 5$ | Summary of processes with large amounts of open file descriptors |
| Orientation | 0x7F07 | MSG_LINUX_PROCESS_FD_SUMMARY | $N + 4$ | Summary of open file descriptors on the system |
| | 0x020F | MSG_BASELINE_HEADING | 10 | Heading relative to True North |
| | 0x0220 | MSG_ORIENT_QUAT | 37 | Quaternion 4 component vector |
| | 0x0221 | MSG_ORIENT_EULER | 29 | Euler angles |
| | 0x0222 | MSG_ANGULAR_RATE | 17 | Vehicle Body Frame instantaneous angular rates |
| Piksi | 0x0069 | MSG_ALMANAC | 0 | Legacy message to load satellite almanac |
| | 0x0068 | MSG_SET_TIME | 0 | Send GPS time from host |
| | 0x00B6 | MSG_RESET | 4 | Reset the device |
| | 0x00B2 | MSG_RESET_DEP | 0 | Reset the device |
| | 0x00C0 | MSG_CW_RESULTS | 0 | Legacy message for CW interference channel (Piksi = \bar{i} host) |
| | 0x00C1 | MSG_CW_START | 0 | Legacy message for CW interference channel |
| | 0x0022 | MSG_RESET_FILTERS | 1 | Reset IAR filters |
| | 0x0023 | MSG_INIT_BASE_DEP | 0 | Deprecated |
| | 0x0017 | MSG_THREAD_STATE | 26 | State of an RTOS thread |
| | 0x001D | MSG_UART_STATE | 74 | State of the UART channels |
| | 0x0018 | MSG_UART_STATE_DEPA | 58 | Deprecated |
| | 0x0019 | MSG_IAR_STATE | 4 | State of the Integer Ambiguity Resolution (IAR) process |
| | 0x002B | MSG_MASK_SATELLITE | 3 | Mask a satellite from use in Piksi subsystems |
| | 0x00B5 | MSG_DEVICE_MONITOR | 10 | Device temperature and voltage levels |
| | 0x00B8 | MSG_COMMAND_REQ | $N + 4$ | Execute a command |
| | 0x00B9 | MSG_COMMAND_RESP | 8 | Exit code from executed command (device = \bar{i} host) |
| | 0x00BC | MSG_COMMAND_OUTPUT | $N + 4$ | Command output |
| | 0x00BA | MSG_NETWORK_STATE_REQ | 0 | Request state of Piksi network interfaces |
| | 0x00BB | MSG_NETWORK_STATE_RESP | 50 | State of network interface |
| | 0x00BD | MSG_NETWORK_BANDWIDTH_USAGE | $40N$ | Bandwidth usage reporting message |
| | 0x00BE | MSG_CELL_MODEM_STATUS | $N + 5$ | Cell modem information update message |
| | 0x0051 | MSG_SPECAN | $N + 28$ | Spectrum analyzer |
| | 0x00BF | MSG_FRONT_END_GAIN | 16 | RF AGC status |
| Sbas | 0x7777 | MSG_SBAS_RAW | 34 | Raw SBAS data |
| Ssr | 0x05DD | MSG_SSR_ORBIT_CLOCK | 50 | Precise orbit and clock correction |
| | 0x05DC | MSG_SSR_ORBIT_CLOCK_DEP_A | 47 | Precise orbit and clock correction |
| | 0x05E1 | MSG_SSR_CODE_BIASES | $3N + 10$ | Precise code biases correction |
| | 0x05E6 | MSG_SSR_PHASE_BIASES | $8N + 15$ | Precise phase biases correction |
| | 0x05EB | MSG_SSR_STEC_CORRECTION | $11N + 10$ | Slant Total Electron Content |
| | 0x05F0 | MSG_SSR_GRIDDED_CORRECTION_NO_STD | $4N + 18$ | Gridded troposphere and STEC residuals |
| | 0x05FA | MSG_SSR_GRIDDED_CORRECTION | $5N + 19$ | Gridded troposphere and STEC residuals |
| | 0x05F5 | MSG_SSR_GRID_DEFINITION | $N + 9$ | Definition of the grid for STEC and tropo messages |
| Tracking | 0x0041 | MSG_TRACKING_STATE | $4N$ | Signal tracking channel states |

| | | | | |
|---------|--------|-----------------------|----------|---|
| | 0x0061 | MSG_MEASUREMENT_STATE | $3N$ | Measurement Engine signal tracking channel states |
| | 0x002D | MSG_TRACKING_IQ | $4N + 3$ | Tracking channel correlations |
| | 0x002C | MSG_TRACKING_IQ_DEP_B | $8N + 3$ | Tracking channel correlations |
| User | 0x0800 | MSG_USER_DATA | N | User data |
| Vehicle | 0x0903 | MSG_ODOMETRY | 9 | Vehicle forward (x-axis) velocity |
| | 0x0904 | MSG_WHEELTICK | 14 | Accumulated wheeltick count message |

Table 5.0.2: SBP message types

6 Stable Message Definitions

6.1 Ext Events


Messages reporting accurately-timestamped external events, e.g. camera shutter time.

MSG_EXT_EVENT — 0x0101 — 257

Reports detection of an external event, the GPS time it occurred, which pin it was and whether it was rising or falling.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------------|--|
| 0 | 2 | u16 | weeks | wn | GPS week number |
| 2 | 4 | u32 | ms | tow | GPS time of week rounded to the nearest millisecond |
| 6 | 4 | s32 | ns | ns_residual | Nanosecond residual of millisecond-rounded TOW (ranges from -500000 to 500000) |
| 10 | 1 | u8 | | flags | Flags |
| 11 | 1 | u8 | | pin | Pin number. 0..9 = DEBUG0..9. |
| | 12 | | | | Total Payload Length |

Table 6.1.1: MSG_EXT_EVENT 0x0101 message structure

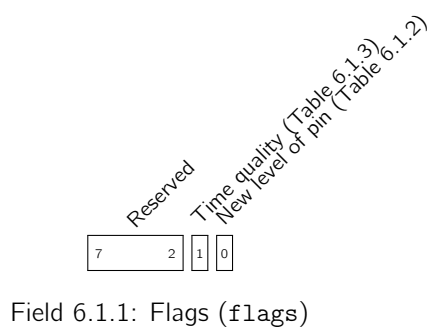

| Value | Description |
|-------|--------------------|
| 0 | Low (falling edge) |
| 1 | High (rising edge) |

Table 6.1.2: New level of pin values (flags[0])

| Value | Description |
|-------|-----------------------------------|
| 0 | Unknown - don't have nav solution |
| 1 | Good (i 1 microsecond) |

Table 6.1.3: Time quality values (flags[1])

6.2 Imu

Inertial Measurement Unit (IMU) messages.


MSG_IMU_RAW — 0x0900 — 2304

Raw data from the Inertial Measurement Unit, containing accelerometer and gyroscope readings. The sense of the measurements are to be aligned with the indications on the device itself. Measurement units, which are specific to the device hardware and settings, are communicated via the MSG_IMU_AUX message. If using "time since startup" time tags, the receiving end will expect a 'MSG_GNSS_TIME_OFFSET' when a PVT fix becomes available to synchronise IMU measurements with GNSS. The timestamp must wrap around to zero when reaching one week (604800 seconds).

The time-tagging mode should not change throughout a run.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------|-------|---|
| 0 | 4 | u32 | | tow | Milliseconds since reference epoch and time status. |
| 4 | 1 | u8 | ms / 256 | tow_f | Milliseconds since reference epoch, fractional part |
| 5 | 2 | s16 | | acc_x | Acceleration in the IMU frame X axis |
| 7 | 2 | s16 | | acc_y | Acceleration in the IMU frame Y axis |
| 9 | 2 | s16 | | acc_z | Acceleration in the IMU frame Z axis |
| 11 | 2 | s16 | | gyr_x | Angular rate around IMU frame X axis |
| 13 | 2 | s16 | | gyr_y | Angular rate around IMU frame Y axis |
| 15 | 2 | s16 | | gyr_z | Angular rate around IMU frame Z axis |
| 17 | | | | | Total Payload Length |

Table 6.2.1: MSG_IMU_RAW 0x0900 message structure

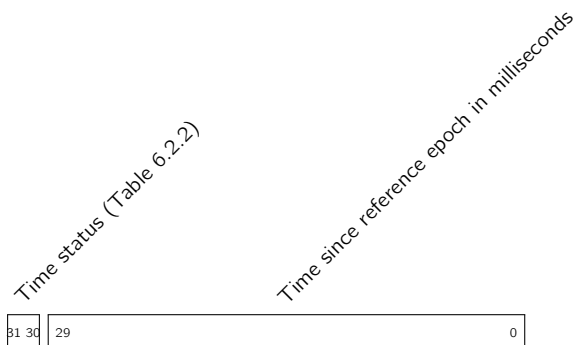

Field 6.2.1: Milliseconds since reference epoch and time status. (`tow`)

| Value | Description |
|-------|--|
| 0 | Reference epoch is start of current GPS week |
| 1 | Reference epoch is time of system startup |
| 2 | Reference epoch is unknown |
| 3 | Reference epoch is last PPS |

Table 6.2.2: Time status values (`tow[30:31]`)

MSG.IMU.AUX — 0x0901 — 2305

Auxiliary data specific to a particular IMU. The 'imu_type' field will always be consistent but the rest of the payload is device specific and depends on the value of 'imu_type'.


| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|----------------------|
| 0 | 1 | u8 | | imu_type | IMU type |
| 1 | 2 | s16 | | temp | Raw IMU temperature |
| 3 | 1 | u8 | | imu_conf | IMU configuration |
| | 4 | | | | Total Payload Length |

Table 6.2.3: MSG.IMU.AUX 0x0901 message structure



| Value | Description |
|-------|-------------------------------|
| 0 | Bosch BMI160 |
| 1 | ST Microelectronics ASM330LLH |

Table 6.2.4: IMU Type values (imu_type[0:7])

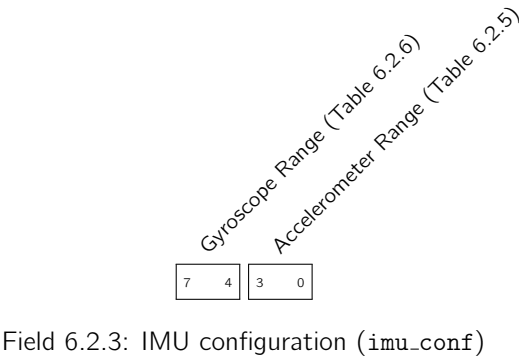

| Value | Description |
|-------|-------------|
| 0 | +/- 2g |
| 1 | +/- 4g |
| 2 | +/- 8g |
| 3 | +/- 16g |

Table 6.2.5: Accelerometer Range values (imu_conf[0:3])

| Value | Description |
|-------|------------------|
| 0 | +/- 2000 deg / s |
| 1 | +/- 1000 deg / s |
| 2 | +/- 500 deg / s |
| 3 | +/- 250 deg / s |
| 4 | +/- 125 deg / s |

Table 6.2.6: Gyroscope Range values (imu_conf[4:7])

6.3 Logging

Logging and debugging messages from the device.

MSG_LOG — 0x0401 — 1025

This message contains a human-readable payload string from the device containing errors, warnings and informational messages at ERROR, WARNING, DEBUG, INFO logging levels.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------|-----------------------|
| 0 | 1 | u8 | | level | Logging level |
| 1 | <i>N</i> | string | | text | Human-readable string |
| | <i>N + 1</i> | | | | Total Payload Length |

Table 6.3.1: MSG_LOG 0x0401 message structure

7

3

2

0

Reserved

Logging level (Table 6.3.2)

| Value | Description |
|-------|-------------|
| 0 | EMERG |
| 1 | ALERT |
| 2 | CRIT |
| 3 | ERROR |
| 4 | WARN |
| 5 | NOTICE |
| 6 | INFO |
| 7 | DEBUG |

Field 6.3.1: Logging level (level)

Table 6.3.2: Logging level values (level[0:2])

MSG_FWD — 0x0402 — 1026

This message provides the ability to forward messages over SBP. This may take the form of wrapping up SBP messages received by Piksi for logging purposes or wrapping another protocol with SBP.

The source identifier indicates from what interface a forwarded stream derived. The protocol identifier identifies what the expected protocol the forwarded msg contains. Protocol 0 represents SBP and the remaining values are implementation defined.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------------|--|
| 0 | 1 | u8 | | source | source identifier |
| 1 | 1 | u8 | | protocol | protocol identifier |
| 2 | <i>N</i> | string | | fwd_payload | variable length wrapped binary message |
| | <i>N + 2</i> | | | | Total Payload Length |

Table 6.3.3: MSG_FWD 0x0402 message structure

6.4 Mag

Magnetometer (mag) messages.

MSG_MAG_RAW — 0x0902 — 2306

Raw data from the magnetometer.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------------|-------|---|
| 0 | 4 | u32 | ms | tow | Milliseconds since start of GPS week. If the high bit is set, the time is unknown or invalid. |
| 4 | 1 | u8 | ms / 256 | tow_f | Milliseconds since start of GPS week, fractional part |
| 5 | 2 | s16 | microteslas | mag_x | Magnetic field in the body frame X axis |
| 7 | 2 | s16 | microteslas | mag_y | Magnetic field in the body frame Y axis |
| 9 | 2 | s16 | microteslas | mag_z | Magnetic field in the body frame Z axis |
| 11 | | | | | Total Payload Length |

Table 6.4.1: MSG_MAG_RAW 0x0902 message structure

6.5 Navigation

Geodetic navigation messages reporting GPS time, position, velocity, and baseline position solutions. For position solutions, these messages define several different position solutions: single-point (SPP), RTK, and pseudo-absolute position solutions.

The SPP is the standalone, absolute GPS position solution using only a single receiver. The RTK solution is the differential GPS solution, which can use either a fixed/integer or floating carrier phase ambiguity. The pseudo-absolute position solution uses a user-provided, well-surveyed base station position (if available) and the RTK solution in tandem.

When the inertial navigation mode indicates that the IMU is used, all messages are reported in the vehicle body frame as defined by device settings. By default, the vehicle body frame is configured to be coincident with the antenna phase center. When there is no inertial navigation, the solution will be reported at the phase center of the antenna. There is no inertial navigation capability on Piksi Multi or Duro.

MSG_GPS_TIME — 0x0102 — 258

This message reports the GPS time, representing the time since the GPS epoch began on midnight January 6, 1980 UTC. GPS time counts the weeks and seconds of the week. The weeks begin at the Saturday/Sunday transition. GPS week 0 began at the beginning of the GPS time scale.

Within each week number, the GPS time of the week is between between 0 and 604800 seconds ($=60*60*24*7$). Note that GPS time does not accumulate leap seconds, and as of now, has a small offset from UTC. In a message stream, this message precedes a set of other navigation messages referenced to the same time (but lacking the ns field) and indicates a more precise time of these messages.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------------|--|
| 0 | 2 | u16 | weeks | wn | GPS week number |
| 2 | 4 | u32 | ms | tow | GPS time of week rounded to the nearest millisecond |
| 6 | 4 | s32 | ns | ns_residual | Nanosecond residual of millisecond-rounded TOW (ranges from -500000 to 500000) |
| 10 | 1 | u8 | | flags | Status flags (reserved) |
| | 11 | | | | Total Payload Length |

Table 6.5.1: MSG_GPS_TIME 0x0102 message structure



Field 6.5.1: Status flags (reserved) (flags)

| Value | Description |
|-------|----------------|
| 0 | None (invalid) |
| 1 | GNSS Solution |
| 2 | Propagated |

Table 6.5.2: Time source values (flags[0:2])

MSG.UTC.TIME — 0x0103 — 259

This message reports the Universal Coordinated Time (UTC). Note the flags which indicate the source of the UTC offset value and source of the time fix.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------------|---------|---|
| 0 | 1 | u8 | | flags | Indicates source and time validity |
| 1 | 4 | u32 | ms | tow | GPS time of week rounded to the nearest millisecond |
| 5 | 2 | u16 | year | year | Year |
| 7 | 1 | u8 | months | month | Month (range 1 .. 12) |
| 8 | 1 | u8 | day | day | days in the month (range 1-31) |
| 9 | 1 | u8 | hours | hours | hours of day (range 0-23) |
| 10 | 1 | u8 | minutes | minutes | minutes of hour (range 0-59) |
| 11 | 1 | u8 | seconds | seconds | seconds of minute (range 0-60) rounded down |
| 12 | 4 | u32 | nanoseconds | ns | nanoseconds of second (range 0-999999999) |
| 16 | | | | | Total Payload Length |


Table 6.5.3: MSG.UTC.TIME 0x0103 message structure

| Value | Description |
|-------|----------------|
| 0 | None (invalid) |
| 1 | GNSS Solution |
| 2 | Propagated |

Table 6.5.4: Time source values (flags[0:2])

| Value | Description |
|-------|----------------------|
| 0 | Factory Default |
| 1 | Non Volatile Memory |
| 2 | Decoded this Session |

Table 6.5.5: UTC offset source values (flags[3:4])



Field 6.5.2: Indicates source and time validity (flags)

MSG_DOPS — 0x0208 — 520

This dilution of precision (DOP) message describes the effect of navigation satellite geometry on positional measurement precision. The flags field indicated whether the DOP reported corresponds to differential or SPP solution.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------|---|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 2 | u16 | 0.01 | gdop | Geometric Dilution of Precision |
| 6 | 2 | u16 | 0.01 | pdop | Position Dilution of Precision |
| 8 | 2 | u16 | 0.01 | tdop | Time Dilution of Precision |
| 10 | 2 | u16 | 0.01 | hdop | Horizontal Dilution of Precision |
| 12 | 2 | u16 | 0.01 | vdop | Vertical Dilution of Precision |
| 14 | 1 | u8 | | flags | Indicates the position solution with which the DOPS message corresponds |
| 15 | | | | | Total Payload Length |

Table 6.5.6: MSG_DOPS 0x0208 message structure

7

6

3

2

0

RAM repair flag

Reserved

Fix mode (Table 6.5.7)

Field 6.5.3: Indicates the position solution with which the DOPS message corresponds (flags)

| Value | Description |
|-------|-----------------------------|
| 0 | Invalid |
| 1 | Single Point Position (SPP) |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Undefined |
| 6 | SBAS Position |

Table 6.5.7: Fix mode values (flags[0:2])

MSG_POS_ECEF — 0x0209 — 521

The position solution message reports absolute Earth Centered Earth Fixed (ECEF) coordinates and the status (single point vs pseudo-absolute RTK) of the position solution. If the rover receiver knows the surveyed position of the base station and has an RTK solution, this reports a pseudo-absolute position solution using the base station position and the rover's RTK baseline vector. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

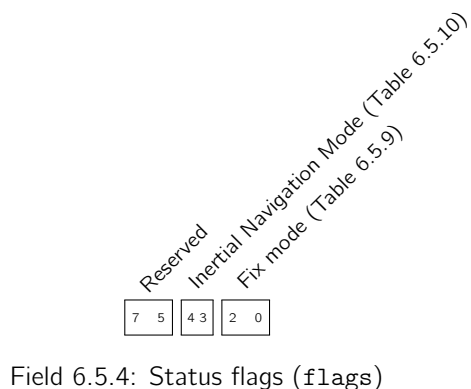
| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-----------------------|---------------------------------------|
| 0 | 4 | u32 | ms | <code>tow</code> | GPS Time of Week |
| 4 | 8 | double | m | <code>x</code> | ECEF X coordinate |
| 12 | 8 | double | m | <code>y</code> | ECEF Y coordinate |
| 20 | 8 | double | m | <code>z</code> | ECEF Z coordinate |
| 28 | 2 | u16 | mm | <code>accuracy</code> | Position estimated standard deviation |
| 30 | 1 | u8 | | <code>n_sats</code> | Number of satellites used in solution |
| 31 | 1 | u8 | | <code>flags</code> | Status flags |
| 32 | | | | | Total Payload Length |

Table 6.5.8: MSG_POS_ECEF 0x0209 message structure

| Value | Description |
|-------|-----------------------------|
| 0 | Invalid |
| 1 | Single Point Position (SPP) |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Dead Reckoning |
| 6 | SBAS Position |

Table 6.5.9: Fix mode values (`flags[0:2]`)

| Value | Description |
|-------|-------------|
| 0 | None |
| 1 | INS used |


Table 6.5.10: Inertial Navigation Mode values (`flags[3:4]`)

MSG_POS_ECEF_COV — 0x0214 — 532

The position solution message reports absolute Earth Centered Earth Fixed (ECEF) coordinates and the status (single point vs pseudo-absolute RTK) of the position solution. The message also reports the upper triangular portion of the 3x3 covariance matrix. If the receiver knows the surveyed position of the base station and has an RTK solution, this reports a pseudo-absolute position solution using the base station position and the rover's RTK baseline vector. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|---------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 8 | double | m | x | ECEF X coordinate |
| 12 | 8 | double | m | y | ECEF Y coordinate |
| 20 | 8 | double | m | z | ECEF Z coordinate |
| 28 | 4 | float | m^2 | cov_x_x | Estimated variance of x |
| 32 | 4 | float | m^2 | cov_x_y | Estimated covariance of x and y |
| 36 | 4 | float | m^2 | cov_x_z | Estimated covariance of x and z |
| 40 | 4 | float | m^2 | cov_y_y | Estimated variance of y |
| 44 | 4 | float | m^2 | cov_y_z | Estimated covariance of y and z |
| 48 | 4 | float | m^2 | cov_z_z | Estimated variance of z |
| 52 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 53 | 1 | u8 | | flags | Status flags |
| 54 | | | | | Total Payload Length |

Table 6.5.11: MSG_POS_ECEF_COV 0x0214 message structure

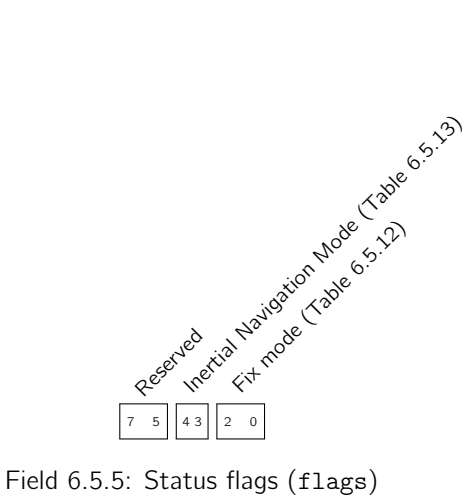

| Value | Description |
|-------|-----------------------------|
| 0 | Invalid |
| 1 | Single Point Position (SPP) |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Dead Reckoning |
| 6 | SBAS Position |

Table 6.5.12: Fix mode values (flags[0:2])

| Value | Description |
|-------|-------------|
| 0 | None |
| 1 | INS used |

Table 6.5.13: Inertial Navigation Mode values (flags[3:4])

MSG_POS_LLH — 0x020A — 522

This position solution message reports the absolute geodetic coordinates and the status (single point vs pseudo-absolute RTK) of the position solution. If the rover receiver knows the surveyed position of the base station and has an RTK solution, this reports a pseudo-absolute position solution using the base station position and the rover’s RTK baseline vector. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------------|--|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 8 | double | deg | lat | Latitude |
| 12 | 8 | double | deg | lon | Longitude |
| 20 | 8 | double | m | height | Height above WGS84 ellipsoid |
| 28 | 2 | u16 | mm | h_accuracy | Horizontal position estimated standard deviation |
| 30 | 2 | u16 | mm | v_accuracy | Vertical position estimated standard deviation |
| 32 | 1 | u8 | | n_sats | Number of satellites used in solution. |
| 33 | 1 | u8 | | flags | Status flags |
| 34 | | | | | Total Payload Length |

Table 6.5.14: MSG_POS_LLH 0x020A message structure



| Value | Description |
|-------|-----------------------------|
| 0 | Invalid |
| 1 | Single Point Position (SPP) |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Dead Reckoning |
| 6 | SBAS Position |

Table 6.5.15: Fix mode values (flags[0:2])

| Value | Description |
|-------|-------------|
| 0 | None |
| 1 | INS used |

Table 6.5.16: Inertial Navigation Mode values (flags[3:4])

MSG_POS_LLH_COV — 0x0211 — 529

This position solution message reports the absolute geodetic coordinates and the status (single point vs pseudo-absolute RTK) of the position solution as well as the upper triangle of the 3x3 covariance matrix. The position information and Fix Mode flags should follow the MSG_POS_LLH message. Since the covariance matrix is computed in the local-level North, East, Down frame, the covariance terms follow with that convention. Thus, covariances are reported against the "downward" measurement and care should be taken with the sign convention.

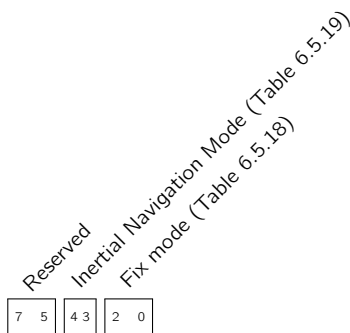
| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------------|----------------------|---|
| 0 | 4 | u32 | ms | <code>tow</code> | GPS Time of Week |
| 4 | 8 | double | deg | <code>lat</code> | Latitude |
| 12 | 8 | double | deg | <code>lon</code> | Longitude |
| 20 | 8 | double | m | <code>height</code> | Height above WGS84 ellipsoid |
| 28 | 4 | float | m ² | <code>cov_n_n</code> | Estimated variance of northing |
| 32 | 4 | float | m ² | <code>cov_n_e</code> | Covariance of northing and easting |
| 36 | 4 | float | m ² | <code>cov_n_d</code> | Covariance of northing and downward measurement |
| 40 | 4 | float | m ² | <code>cov_e_e</code> | Estimated variance of easting |
| 44 | 4 | float | m ² | <code>cov_e_d</code> | Covariance of easting and downward measurement |
| 48 | 4 | float | m ² | <code>cov_d_d</code> | Estimated variance of downward measurement |
| 52 | 1 | u8 | | <code>n_sats</code> | Number of satellites used in solution. |
| 53 | 1 | u8 | | <code>flags</code> | Status flags |
| 54 | | | | | Total Payload Length |

Table 6.5.17: MSG_POS_LLH_COV 0x0211 message structure

| Value | Description |
|-------|-----------------------------|
| 0 | Invalid |
| 1 | Single Point Position (SPP) |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Dead Reckoning |
| 6 | SBAS Position |

Table 6.5.18: Fix mode values (`flags[0:2]`)

| Value | Description |
|-------|-------------|
| 0 | None |
| 1 | INS used |


Table 6.5.19: Inertial Navigation Mode values (`flags[3:4]`)Field 6.5.7: Status flags (`flags`)

MSG_BASELINE_ECEF — 0x020B — 523

This message reports the baseline solution in Earth Centered Earth Fixed (ECEF) coordinates. This baseline is the relative vector distance from the base station to the rover receiver. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm | x | Baseline ECEF X coordinate |
| 8 | 4 | s32 | mm | y | Baseline ECEF Y coordinate |
| 12 | 4 | s32 | mm | z | Baseline ECEF Z coordinate |
| 16 | 2 | u16 | mm | accuracy | Position estimated standard deviation |
| 18 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 19 | 1 | u8 | | flags | Status flags |
| 20 | | | | | Total Payload Length |

Table 6.5.20: MSG_BASELINE_ECEF 0x020B message structure

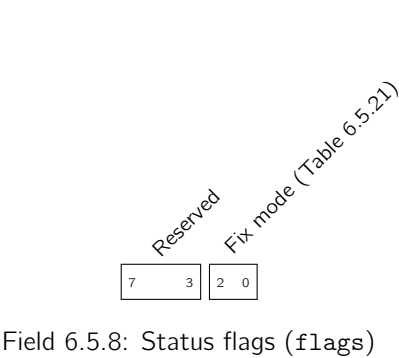

Field 6.5.8: Status flags (flags)

| Value | Description |
|-------|---------------------------|
| 0 | Invalid |
| 1 | Reserved |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Reserved |
| 6 | Reserved |


Table 6.5.21: Fix mode values (flags[0:2])

MSG_BASELINE_NED — 0x020C — 524

This message reports the baseline solution in North East Down (NED) coordinates. This baseline is the relative vector distance from the base station to the rover receiver, and NED coordinate system is defined at the local WGS84 tangent plane centered at the base station position. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------------|--|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm | n | Baseline North coordinate |
| 8 | 4 | s32 | mm | e | Baseline East coordinate |
| 12 | 4 | s32 | mm | d | Baseline Down coordinate |
| 16 | 2 | u16 | mm | h_accuracy | Horizontal position estimated standard deviation |
| 18 | 2 | u16 | mm | v_accuracy | Vertical position estimated standard deviation |
| 20 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 21 | 1 | u8 | | flags | Status flags |
| 22 | | | | | Total Payload Length |

Table 6.5.22: MSG_BASELINE_NED 0x020C message structure

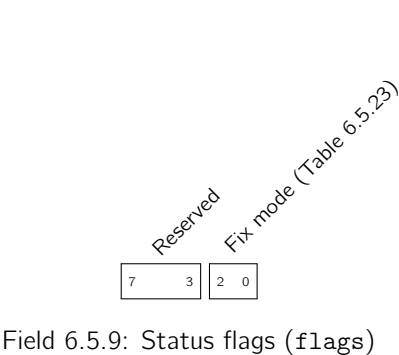

| Value | Description |
|-------|---------------------------|
| 0 | Invalid |
| 1 | Reserved |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Reserved |
| 6 | Reserved |


Table 6.5.23: Fix mode values (flags[0:2])

MSG_VEL_ECEF — 0x020D — 525

This message reports the velocity in Earth Centered Earth Fixed (ECEF) coordinates. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm/s | x | Velocity ECEF X coordinate |
| 8 | 4 | s32 | mm/s | y | Velocity ECEF Y coordinate |
| 12 | 4 | s32 | mm/s | z | Velocity ECEF Z coordinate |
| 16 | 2 | u16 | mm/s | accuracy | Velocity estimated standard deviation |
| 18 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 19 | 1 | u8 | | flags | Status flags |
| 20 | | | | | Total Payload Length |

Table 6.5.24: MSG_VEL_ECEF 0x020D message structure

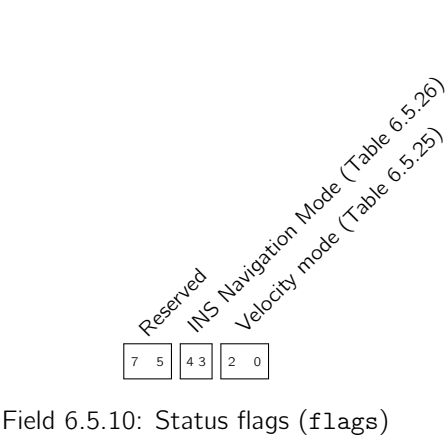

| Value | Description |
|-------|--------------------------|
| 0 | Invalid |
| 1 | Measured Doppler derived |
| 2 | Computed Doppler derived |
| 3 | Dead Reckoning |

Table 6.5.25: Velocity mode values (flags[0:2])

| Value | Description |
|-------|-------------|
| 0 | None |
| 1 | INS used |

Table 6.5.26: INS Navigation Mode values (flags[3:4])

MSG_VEL_ECEF_COV — 0x0215 — 533

This message reports the velocity in Earth Centered Earth Fixed (ECEF) coordinates. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|--------------------------------|---------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm/s | x | Velocity ECEF X coordinate |
| 8 | 4 | s32 | mm/s | y | Velocity ECEF Y coordinate |
| 12 | 4 | s32 | mm/s | z | Velocity ECEF Z coordinate |
| 16 | 4 | float | m ² /s ² | cov_x_x | Estimated variance of x |
| 20 | 4 | float | m ² /s ² | cov_x_y | Estimated covariance of x and y |
| 24 | 4 | float | m ² /s ² | cov_x_z | Estimated covariance of x and z |
| 28 | 4 | float | m ² /s ² | cov_y_y | Estimated variance of y |
| 32 | 4 | float | m ² /s ² | cov_y_z | Estimated covariance of y and z |
| 36 | 4 | float | m ² /s ² | cov_z_z | Estimated variance of z |
| 40 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 41 | 1 | u8 | | flags | Status flags |
| 42 | | | | | Total Payload Length |

Table 6.5.27: MSG_VEL_ECEF_COV 0x0215 message structure



| Value | Description |
|-------|--------------------------|
| 0 | Invalid |
| 1 | Measured Doppler derived |
| 2 | Computed Doppler derived |
| 3 | Dead Reckoning |

Table 6.5.28: Velocity mode values (flags[0:2])

| Value | Description |
|-------|-------------|
| 0 | None |
| 1 | INS used |


Table 6.5.29: INS Navigation Mode values (flags[3:4])

MSG_VEL_NED — 0x020E — 526

This message reports the velocity in local North East Down (NED) coordinates. The NED coordinate system is defined as the local WGS84 tangent plane centered at the current position. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------------|--|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm/s | n | Velocity North coordinate |
| 8 | 4 | s32 | mm/s | e | Velocity East coordinate |
| 12 | 4 | s32 | mm/s | d | Velocity Down coordinate |
| 16 | 2 | u16 | mm/s | h_accuracy | Horizontal velocity estimated standard deviation |
| 18 | 2 | u16 | mm/s | v_accuracy | Vertical velocity estimated standard deviation |
| 20 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 21 | 1 | u8 | | flags | Status flags |
| 22 | | | | | Total Payload Length |

Table 6.5.30: MSG_VEL_NED 0x020E message structure

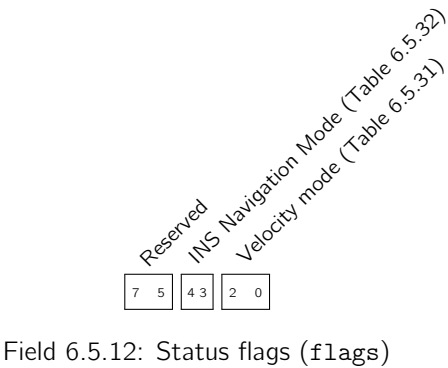

| Value | Description |
|-------|--------------------------|
| 0 | Invalid |
| 1 | Measured Doppler derived |
| 2 | Computed Doppler derived |
| 3 | Dead Reckoning |

Table 6.5.31: Velocity mode values (flags[0:2])

| Value | Description |
|-------|-------------|
| 0 | None |
| 1 | INS used |


Table 6.5.32: INS Navigation Mode values (flags[3:4])

MSG_VEL_NED_COV — 0x0212 — 530

This message reports the velocity in local North East Down (NED) coordinates. The NED coordinate system is defined as the local WGS84 tangent plane centered at the current position. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow). This message is similar to the MSG_VEL_NED, but it includes the upper triangular portion of the 3x3 covariance matrix.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|---------|--|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm/s | n | Velocity North coordinate |
| 8 | 4 | s32 | mm/s | e | Velocity East coordinate |
| 12 | 4 | s32 | mm/s | d | Velocity Down coordinate |
| 16 | 4 | float | m^2 | cov_n_n | Estimated variance of northward measurement |
| 20 | 4 | float | m^2 | cov_n_e | Covariance of northward and eastward measurement |
| 24 | 4 | float | m^2 | cov_n_d | Covariance of northward and downward measurement |
| 28 | 4 | float | m^2 | cov_e_e | Estimated variance of eastward measurement |
| 32 | 4 | float | m^2 | cov_e_d | Covariance of eastward and downward measurement |
| 36 | 4 | float | m^2 | cov_d_d | Estimated variance of downward measurement |
| 40 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 41 | 1 | u8 | | flags | Status flags |
| 42 | | | | | Total Payload Length |

Table 6.5.33: MSG_VEL_NED_COV 0x0212 message structure

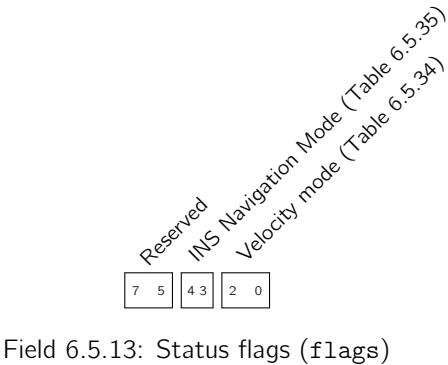

| Value | Description |
|-------|--------------------------|
| 0 | Invalid |
| 1 | Measured Doppler derived |
| 2 | Computed Doppler derived |
| 3 | Dead Reckoning |

Table 6.5.34: Velocity mode values (flags[0:2])

| Value | Description |
|-------|-------------|
| 0 | None |
| 1 | INS used |

Table 6.5.35: INS Navigation Mode values (flags[3:4])

MSG_POS_ECEF_GNSS — 0x0229 — 553

The position solution message reports absolute Earth Centered Earth Fixed (ECEF) coordinates and the status (single point vs pseudo-absolute RTK) of the position solution. If the rover receiver knows the surveyed position of the base station and has an RTK solution, this reports a pseudo-absolute position solution using the base station position and the rover’s RTK baseline vector. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 8 | double | m | x | ECEF X coordinate |
| 12 | 8 | double | m | y | ECEF Y coordinate |
| 20 | 8 | double | m | z | ECEF Z coordinate |
| 28 | 2 | u16 | mm | accuracy | Position estimated standard deviation |
| 30 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 31 | 1 | u8 | | flags | Status flags |
| 32 | | | | | Total Payload Length |

Table 6.5.36: MSG_POS_ECEF_GNSS 0x0229 message structure



Field 6.5.14: Status flags (flags)

| Value | Description |
|-------|-----------------------------|
| 0 | Invalid |
| 1 | Single Point Position (SPP) |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Reserved |
| 6 | SBAS Position |

Table 6.5.37: Fix mode values (flags[0:2])

MSG_POS_ECEF_COV_GNSS — 0x0234 — 564

The position solution message reports absolute Earth Centered Earth Fixed (ECEF) coordinates and the status (single point vs pseudo-absolute RTK) of the position solution. The message also reports the upper triangular portion of the 3x3 covariance matrix. If the receiver knows the surveyed position of the base station and has an RTK solution, this reports a pseudo-absolute position solution using the base station position and the rover's RTK baseline vector. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|---------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 8 | double | m | x | ECEF X coordinate |
| 12 | 8 | double | m | y | ECEF Y coordinate |
| 20 | 8 | double | m | z | ECEF Z coordinate |
| 28 | 4 | float | m^2 | cov_x_x | Estimated variance of x |
| 32 | 4 | float | m^2 | cov_x_y | Estimated covariance of x and y |
| 36 | 4 | float | m^2 | cov_x_z | Estimated covariance of x and z |
| 40 | 4 | float | m^2 | cov_y_y | Estimated variance of y |
| 44 | 4 | float | m^2 | cov_y_z | Estimated covariance of y and z |
| 48 | 4 | float | m^2 | cov_z_z | Estimated variance of z |
| 52 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 53 | 1 | u8 | | flags | Status flags |
| 54 | | | | | Total Payload Length |

Table 6.5.38: MSG_POS_ECEF_COV_GNSS 0x0234 message structure

7

3

2

0

Reserved

Fix mode (Table 6.5.39)

Field 6.5.15: Status flags (flags)

| Value | Description |
|-------|-----------------------------|
| 0 | Invalid |
| 1 | Single Point Position (SPP) |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Reserved |
| 6 | SBAS Position |

Table 6.5.39: Fix mode values (flags[0:2])

MSG_POS_LLH_GNSS — 0x022A — 554

This position solution message reports the absolute geodetic coordinates and the status (single point vs pseudo-absolute RTK) of the position solution. If the rover receiver knows the surveyed position of the base station and has an RTK solution, this reports a pseudo-absolute position solution using the base station position and the rover’s RTK baseline vector. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------------|--|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 8 | double | deg | lat | Latitude |
| 12 | 8 | double | deg | lon | Longitude |
| 20 | 8 | double | m | height | Height above WGS84 ellipsoid |
| 28 | 2 | u16 | mm | h_accuracy | Horizontal position estimated standard deviation |
| 30 | 2 | u16 | mm | v_accuracy | Vertical position estimated standard deviation |
| 32 | 1 | u8 | | n_sats | Number of satellites used in solution. |
| 33 | 1 | u8 | | flags | Status flags |
| 34 | | | | | Total Payload Length |

Table 6.5.40: MSG_POS_LLH_GNSS 0x022A message structure

7

3

2

0

Reserved

Fix mode (Table 6.5.41)

| Value | Description |
|-------|-----------------------------|
| 0 | Invalid |
| 1 | Single Point Position (SPP) |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Reserved |
| 6 | SBAS Position |

Field 6.5.16: Status flags (flags)


Table 6.5.41: Fix mode values (flags[0:2])

MSG_POS_LLH_COV_GNSS — 0x0231 — 561

This position solution message reports the absolute geodetic coordinates and the status (single point vs pseudo-absolute RTK) of the position solution as well as the upper triangle of the 3x3 covariance matrix. The position information and Fix Mode flags should follow the MSG_POS_LLH message. Since the covariance matrix is computed in the local-level North, East, Down frame, the covariance terms follow with that convention. Thus, covariances are reported against the "downward" measurement and care should be taken with the sign convention.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------------|----------------------|---|
| 0 | 4 | u32 | ms | <code>tow</code> | GPS Time of Week |
| 4 | 8 | double | deg | <code>lat</code> | Latitude |
| 12 | 8 | double | deg | <code>lon</code> | Longitude |
| 20 | 8 | double | m | <code>height</code> | Height above WGS84 ellipsoid |
| 28 | 4 | float | m ² | <code>cov_n_n</code> | Estimated variance of northing |
| 32 | 4 | float | m ² | <code>cov_n_e</code> | Covariance of northing and easting |
| 36 | 4 | float | m ² | <code>cov_n_d</code> | Covariance of northing and downward measurement |
| 40 | 4 | float | m ² | <code>cov_e_e</code> | Estimated variance of easting |
| 44 | 4 | float | m ² | <code>cov_e_d</code> | Covariance of easting and downward measurement |
| 48 | 4 | float | m ² | <code>cov_d_d</code> | Estimated variance of downward measurement |
| 52 | 1 | u8 | | <code>n_sats</code> | Number of satellites used in solution. |
| 53 | 1 | u8 | | <code>flags</code> | Status flags |
| 54 | | | | | Total Payload Length |

Table 6.5.42: MSG_POS_LLH_COV_GNSS 0x0231 message structure

Field 6.5.17: Status flags (`flags`)

| Value | Description |
|-------|-----------------------------|
| 0 | Invalid |
| 1 | Single Point Position (SPP) |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |
| 5 | Dead Reckoning |
| 6 | SBAS Position |

Table 6.5.43: Fix mode values (`flags[0:2]`)

MSG_VEL_ECEF_GNSS — 0x022D — 557

This message reports the velocity in Earth Centered Earth Fixed (ECEF) coordinates. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm/s | x | Velocity ECEF X coordinate |
| 8 | 4 | s32 | mm/s | y | Velocity ECEF Y coordinate |
| 12 | 4 | s32 | mm/s | z | Velocity ECEF Z coordinate |
| 16 | 2 | u16 | mm/s | accuracy | Velocity estimated standard deviation |
| 18 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 19 | 1 | u8 | | flags | Status flags |
| 20 | | | | | Total Payload Length |

Table 6.5.44: MSG_VEL_ECEF_GNSS 0x022D message structure



Field 6.5.18: Status flags (flags)

| Value | Description |
|-------|--------------------------|
| 0 | Invalid |
| 1 | Measured Doppler derived |
| 2 | Computed Doppler derived |
| 3 | Reserved |


Table 6.5.45: Velocity mode values (flags[0:2])

MSG_VEL_ECEF_COV_GNSS — 0x0235 — 565

This message reports the velocity in Earth Centered Earth Fixed (ECEF) coordinates. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|--------------------------------|---------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm/s | x | Velocity ECEF X coordinate |
| 8 | 4 | s32 | mm/s | y | Velocity ECEF Y coordinate |
| 12 | 4 | s32 | mm/s | z | Velocity ECEF Z coordinate |
| 16 | 4 | float | m ² /s ² | cov_x_x | Estimated variance of x |
| 20 | 4 | float | m ² /s ² | cov_x_y | Estimated covariance of x and y |
| 24 | 4 | float | m ² /s ² | cov_x_z | Estimated covariance of x and z |
| 28 | 4 | float | m ² /s ² | cov_y_y | Estimated variance of y |
| 32 | 4 | float | m ² /s ² | cov_y_z | Estimated covariance of y and z |
| 36 | 4 | float | m ² /s ² | cov_z_z | Estimated variance of z |
| 40 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 41 | 1 | u8 | | flags | Status flags |
| 42 | | | | | Total Payload Length |

Table 6.5.46: MSG_VEL_ECEF_COV_GNSS 0x0235 message structure



Field 6.5.19: Status flags (flags)

| Value | Description |
|-------|--------------------------|
| 0 | Invalid |
| 1 | Measured Doppler derived |
| 2 | Computed Doppler derived |
| 3 | Reserved |


Table 6.5.47: Velocity mode values (flags[0:2])

MSG_VEL_NED_GNSS — 0x022E — 558

This message reports the velocity in local North East Down (NED) coordinates. The NED coordinate system is defined as the local WGS84 tangent plane centered at the current position. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------------|--|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm/s | n | Velocity North coordinate |
| 8 | 4 | s32 | mm/s | e | Velocity East coordinate |
| 12 | 4 | s32 | mm/s | d | Velocity Down coordinate |
| 16 | 2 | u16 | mm/s | h_accuracy | Horizontal velocity estimated standard deviation |
| 18 | 2 | u16 | mm/s | v_accuracy | Vertical velocity estimated standard deviation |
| 20 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 21 | 1 | u8 | | flags | Status flags |
| 22 | | | | | Total Payload Length |

Table 6.5.48: MSG_VEL_NED_GNSS 0x022E message structure

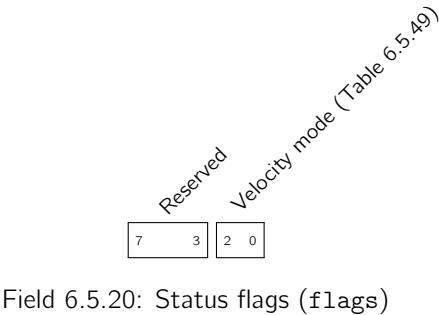

| Value | Description |
|-------|--------------------------|
| 0 | Invalid |
| 1 | Measured Doppler derived |
| 2 | Computed Doppler derived |
| 3 | Reserved |

Table 6.5.49: Velocity mode values (flags[0:2])

MSG_VEL_NED_COV_GNSS — 0x0232 — 562

This message reports the velocity in local North East Down (NED) coordinates. The NED coordinate system is defined as the local WGS84 tangent plane centered at the current position. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow). This message is similar to the MSG_VEL_NED, but it includes the upper triangular portion of the 3x3 covariance matrix.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|---------|--|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm/s | n | Velocity North coordinate |
| 8 | 4 | s32 | mm/s | e | Velocity East coordinate |
| 12 | 4 | s32 | mm/s | d | Velocity Down coordinate |
| 16 | 4 | float | m^2 | cov_n_n | Estimated variance of northward measurement |
| 20 | 4 | float | m^2 | cov_n_e | Covariance of northward and eastward measurement |
| 24 | 4 | float | m^2 | cov_n_d | Covariance of northward and downward measurement |
| 28 | 4 | float | m^2 | cov_e_e | Estimated variance of eastward measurement |
| 32 | 4 | float | m^2 | cov_e_d | Covariance of eastward and downward measurement |
| 36 | 4 | float | m^2 | cov_d_d | Estimated variance of downward measurement |
| 40 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 41 | 1 | u8 | | flags | Status flags |
| 42 | | | | | Total Payload Length |

Table 6.5.50: MSG_VEL_NED_COV_GNSS 0x0232 message structure



| Value | Description |
|-------|--------------------------|
| 0 | Invalid |
| 1 | Measured Doppler derived |
| 2 | Computed Doppler derived |
| 3 | Reserved |

Table 6.5.51: Velocity mode values (flags[0:2])

MSG_VEL_BODY — 0x0213 — 531

This message reports the velocity in the Vehicle Body Frame. By convention, the x-axis should point out the nose of the vehicle and represent the forward direction, while as the y-axis should point out the right hand side of the vehicle. Since this is a right handed system, z should point out the bottom of the vehicle. The orientation and origin of the Vehicle Body Frame are specified via the device settings. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow). This message is only produced by inertial versions of Swift products and is not available from Piksi Multi or Duro.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------------|---------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | mm/s | x | Velocity in x direction |
| 8 | 4 | s32 | mm/s | y | Velocity in y direction |
| 12 | 4 | s32 | mm/s | z | Velocity in z direction |
| 16 | 4 | float | m ² | cov_x_x | Estimated variance of x |
| 20 | 4 | float | m ² | cov_x_y | Covariance of x and y |
| 24 | 4 | float | m ² | cov_x_z | Covariance of x and z |
| 28 | 4 | float | m ² | cov_y_y | Estimated variance of y |
| 32 | 4 | float | m ² | cov_y_z | Covariance of y and z |
| 36 | 4 | float | m ² | cov_z_z | Estimated variance of z |
| 40 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 41 | 1 | u8 | | flags | Status flags |
| 42 | | | | | Total Payload Length |

Table 6.5.52: MSG_VEL_BODY 0x0213 message structure

| Value | Description |
|-------|--------------------------|
| 0 | Invalid |
| 1 | Measured Doppler derived |
| 2 | Computed Doppler derived |
| 3 | Dead Reckoning |

Table 6.5.53: Velocity mode values (flags[0:2])



Field 6.5.22: Status flags (flags)

| Value | Description |
|-------|-------------|
| 0 | None |
| 1 | INS used |

Table 6.5.54: INS Navigation Mode values (flags[3:4])

MSG_AGE_CORRECTIONS — 0x0210 — 528

This message reports the Age of the corrections used for the current Differential solution

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------------|------|---|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 2 | u16 | deciseconds | age | Age of the corrections (0xFFFF indicates invalid) |
| 6 | | | | | Total Payload Length |

Table 6.5.55: MSG_AGE_CORRECTIONS 0x0210 message structure

6.6 Observation


Satellite observation messages from the device.

MSG_OBS — 0x004A — 74


The GPS observations message reports all the raw pseudorange and carrier phase observations for the satellites being tracked by the device. Carrier phase observation here is represented as a 40-bit fixed point number with Q32.8 layout (i.e. 32-bits of whole cycles and 8-bits of fractional cycles). The observations are be interoperable with 3rd party receivers and conform with typical RTCMv3 GNSS observations.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|--------------|----------------------|--|
| 0 | 4 | u32 | ms | header.t.tow | Milliseconds since start of GPS week |
| 4 | 4 | s32 | ns | header.t.ns_residual | Nanosecond residual of millisecond-rounded TOW (ranges from -500000 to 500000) |
| 8 | 2 | u16 | week | header.t.wn | GPS week number |
| 10 | 1 | u8 | | header.n_obs | Total number of observations. First nibble is the size of the sequence (n), second nibble is the zero-indexed counter (ith packet of n) |
| $17N + 11$ | 4 | u32 | 2 cm | obs[N].P | Pseudorange observation |
| $17N + 15$ | 4 | s32 | cycles | obs[N].L.i | Carrier phase whole cycles |
| $17N + 19$ | 1 | u8 | cycles / 256 | obs[N].L.f | Carrier phase fractional part |
| $17N + 20$ | 2 | s16 | Hz | obs[N].D.i | Doppler whole Hz |
| $17N + 22$ | 1 | u8 | Hz / 256 | obs[N].D.f | Doppler fractional part |
| $17N + 23$ | 1 | u8 | dB Hz / 4 | obs[N].cn0 | Carrier-to-Noise density. Zero implies invalid cn0. |
| $17N + 24$ | 1 | u8 | | obs[N].lock | Lock timer. This value gives an indication of the time for which a signal has maintained continuous phase lock. Whenever a signal has lost and regained lock, this value is reset to zero. It is encoded according to DF402 from the RTCM 10403.2 Amendment 2 specification. Valid values range from 0 to 15 and the most significant nibble is reserved for future use. |
| $17N + 25$ | 1 | u8 | | obs[N].flags | Measurement status flags. A bit field of flags providing the status of this observation. If this field is 0 it means only the Cn0 estimate for the signal is valid. |
| $17N + 26$ | 1 | u8 | | obs[N].sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| $17N + 27$ | 1 | u8 | | obs[N].sid.code | Signal constellation, band and code |
| $17N + 11$ | | | | | Total Payload Length |

Table 6.6.1: MSG_OBS 0x004A message structure

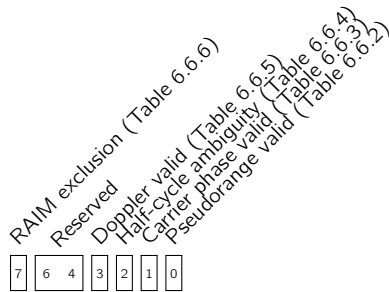

Field 6.6.1: Measurement status flags. A bit field of flags providing the status of this observation. If this field is 0 it means only the Cn0 estimate for the signal is valid. (flags)



Field 6.6.2: Signal constellation, band and code (sid.code)

| Value | Description |
|-------|--|
| 0 | Invalid pseudorange measurement |
| 1 | Valid pseudorange measurement and coarse TOW decoded |

Table 6.6.2: Pseudorange valid values (flags[0])

| Value | Description |
|-------|-----------------------------------|
| 0 | Invalid carrier phase measurement |
| 1 | Valid carrier phase measurement |

Table 6.6.3: Carrier phase valid values (flags[1])

| Value | Description |
|-------|---------------------------------------|
| 0 | Half cycle phase ambiguity unresolved |
| 1 | Half cycle phase ambiguity resolved |

Table 6.6.4: Half-cycle ambiguity values (flags[2])

| Value | Description |
|-------|-----------------------------|
| 0 | Invalid doppler measurement |
| 1 | Valid doppler measurement |

Table 6.6.5: Doppler valid values (flags[3])

| Value | Description |
|-------|---|
| 0 | No exclusion |
| 1 | Measurement was excluded by SPP RAIM, use with care |

Table 6.6.6: RAIM exclusion values (flags[7])

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.7: values (sid.code[0:7])

MSG_BASE_POS_LLH — 0x0044 — 68

The base station position message is the position reported by the base station itself. It is used for pseudo-absolute RTK positioning, and is required to be a high-accuracy surveyed location of the base station. Any error here will result in an error in the pseudo-absolute position output.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|--------|----------------------|
| 0 | 8 | double | deg | lat | Latitude |
| 8 | 8 | double | deg | lon | Longitude |
| 16 | 8 | double | m | height | Height |
| 24 | | | | | Total Payload Length |

Table 6.6.8: MSG_BASE_POS_LLH 0x0044 message structure

MSG_BASE_POS_ECEF — 0x0048 — 72

The base station position message is the position reported by the base station itself in absolute Earth Centered Earth Fixed coordinates. It is used for pseudo-absolute RTK positioning, and is required to be a high-accuracy surveyed location of the base station. Any error here will result in an error in the pseudo-absolute position output.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------|----------------------|
| 0 | 8 | double | m | x | ECEF X coordinate |
| 8 | 8 | double | m | y | ECEF Y coordinate |
| 16 | 8 | double | m | z | ECEF Z coordinate |
| | 24 | | | | Total Payload Length |

Table 6.6.9: MSG_BASE_POS_ECEF 0x0048 message structure

MSG_EPHEMERIS_GPS_DEP_E — 0x0081 — 129

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GPS satellite position, velocity, and clock offset. Please see the Navstar GPS Space Segment/Navigation user interfaces (ICD-GPS-200, Table 20-III) for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------|---------------------|---|
| 0 | 2 | u16 | | common.sid.sat | Constellation-specific satellite identifier. Note: unlike GnssSignal, GPS satellites are encoded as (PRN - 1). Other constellations do not have this offset. |
| 2 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 3 | 1 | u8 | | common.sid.reserved | Reserved |
| 4 | 4 | u32 | ms | common.toe.tow | Milliseconds since start of GPS week |
| 8 | 2 | u16 | week | common.toe.wn | GPS week number |
| 10 | 8 | double | m | common.ura | User Range Accuracy |
| 18 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 22 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 23 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 24 | 8 | double | s | tgd | Group delay differential between L1 and L2 |
| 32 | 8 | double | m | c_rsr | Amplitude of the sine harmonic correction term to the orbit radius |
| 40 | 8 | double | m | c_rcr | Amplitude of the cosine harmonic correction term to the orbit radius |
| 48 | 8 | double | rad | c_ucr | Amplitude of the cosine harmonic correction term to the argument of latitude |
| 56 | 8 | double | rad | c_usr | Amplitude of the sine harmonic correction term to the argument of latitude |
| 64 | 8 | double | rad | c_icr | Amplitude of the cosine harmonic correction term to the angle of inclination |
| 72 | 8 | double | rad | c_isr | Amplitude of the sine harmonic correction term to the angle of inclination |
| 80 | 8 | double | rad/s | dn | Mean motion difference |
| 88 | 8 | double | rad | m0 | Mean anomaly at reference time |
| 96 | 8 | double | | ecc | Eccentricity of satellite orbit |
| 104 | 8 | double | m^(1/2) | sqrta | Square root of the semi-major axis of orbit |
| 112 | 8 | double | rad | omega0 | Longitude of ascending node of orbit plane at weekly epoch |
| 120 | 8 | double | rad/s | omegadot | Rate of right ascension |
| 128 | 8 | double | rad | w | Argument of perigee |
| 136 | 8 | double | rad | inc | Inclination |
| 144 | 8 | double | rad/s | inc_dot | Inclination first derivative |
| 152 | 8 | double | s | af0 | Polynomial clock correction coefficient (clock bias) |
| 160 | 8 | double | s/s | af1 | Polynomial clock correction coefficient (clock drift) |
| 168 | 8 | double | s/s^2 | af2 | Polynomial clock correction coefficient (rate of clock drift) |
| 176 | 4 | u32 | ms | toc.tow | Milliseconds since start of GPS week |
| 180 | 2 | u16 | week | toc.wn | GPS week number |
| 182 | 1 | u8 | | iode | Issue of ephemeris data |
| 183 | 2 | u16 | | iodc | Issue of clock data |
| 185 | | | | | Total Payload Length |

Table 6.6.10: MSG_EPHEMERIS_GPS_DEP_E 0x0081 message structure



Field 6.6.3: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |

Table 6.6.11: values (common.sid.code[0:7])

MSG_EPHEMERIS_GPS_DEP_F — 0x0086 — 134

This observation message has been deprecated in favor of ephemeris message using floats for size reduction.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------|-----------------|--|
| 0 | 1 | u8 | | common.sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.tow | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 8 | double | m | common.ura | User Range Accuracy |
| 16 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 20 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 21 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 Others: 0 = valid, non-zero = invalid |
| 22 | 8 | double | s | tgd | Group delay differential between L1 and L2 |
| 30 | 8 | double | m | c_rsr | Amplitude of the sine harmonic correction term to the orbit radius |
| 38 | 8 | double | m | c_rcr | Amplitude of the cosine harmonic correction term to the orbit radius |
| 46 | 8 | double | rad | c_ucr | Amplitude of the cosine harmonic correction term to the argument of latitude |
| 54 | 8 | double | rad | c_usr | Amplitude of the sine harmonic correction term to the argument of latitude |
| 62 | 8 | double | rad | c_icr | Amplitude of the cosine harmonic correction term to the angle of inclination |
| 70 | 8 | double | rad | c_isr | Amplitude of the sine harmonic correction term to the angle of inclination |
| 78 | 8 | double | rad/s | dn | Mean motion difference |
| 86 | 8 | double | rad | m0 | Mean anomaly at reference time |
| 94 | 8 | double | | ecc | Eccentricity of satellite orbit |
| 102 | 8 | double | m^(1/2) | sqrta | Square root of the semi-major axis of orbit |
| 110 | 8 | double | rad | omega0 | Longitude of ascending node of orbit plane at weekly epoch |
| 118 | 8 | double | rad/s | omegadot | Rate of right ascension |
| 126 | 8 | double | rad | w | Argument of perigee |
| 134 | 8 | double | rad | inc | Inclination |
| 142 | 8 | double | rad/s | inc_dot | Inclination first derivative |
| 150 | 8 | double | s | af0 | Polynomial clock correction coefficient (clock bias) |
| 158 | 8 | double | s/s | af1 | Polynomial clock correction coefficient (clock drift) |
| 166 | 8 | double | s/s^2 | af2 | Polynomial clock correction coefficient (rate of clock drift) |
| 174 | 4 | u32 | s | toc.tow | Seconds since start of GPS week |
| 178 | 2 | u16 | week | toc.wn | GPS week number |
| 180 | 1 | u8 | | iode | Issue of ephemeris data |
| 181 | 2 | u16 | | iodc | Issue of clock data |
| 183 | | | | | Total Payload Length |

Table 6.6.12: MSG_EPHEMERIS_GPS_DEP_F 0x0086 message structure



Field 6.6.4: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |


Table 6.6.13: values (common.sid.code[0:7])

MSG_EPHEMERIS_GPS — 0x008A — 138

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GPS satellite position, velocity, and clock offset. Please see the Navstar GPS Space Segment/Navigation user interfaces (ICD-GPS-200, Table 20-III) for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------|-----------------|--|
| 0 | 1 | u8 | | common.sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.tot | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 4 | float | m | common.ura | User Range Accuracy |
| 12 | 4 | u32 | s | common.fit_int | Curve fit interval |
| 16 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 17 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 18 | 4 | float | s | tgdt | Group delay differential between L1 and L2 |
| 22 | 4 | float | m | c_rsr | Amplitude of the sine harmonic correction term to the orbit radius |
| 26 | 4 | float | m | c_rrc | Amplitude of the cosine harmonic correction term to the orbit radius |
| 30 | 4 | float | rad | c_ucr | Amplitude of the cosine harmonic correction term to the argument of latitude |
| 34 | 4 | float | rad | c_usr | Amplitude of the sine harmonic correction term to the argument of latitude |
| 38 | 4 | float | rad | c_icr | Amplitude of the cosine harmonic correction term to the angle of inclination |
| 42 | 4 | float | rad | c_isr | Amplitude of the sine harmonic correction term to the angle of inclination |
| 46 | 8 | double | rad/s | dn | Mean motion difference |
| 54 | 8 | double | rad | m0 | Mean anomaly at reference time |
| 62 | 8 | double | | ecc | Eccentricity of satellite orbit |
| 70 | 8 | double | m^(1/2) | sqrta | Square root of the semi-major axis of orbit |
| 78 | 8 | double | rad | omega0 | Longitude of ascending node of orbit plane at weekly epoch |
| 86 | 8 | double | rad/s | omegadot | Rate of right ascension |
| 94 | 8 | double | rad | w | Argument of perigee |
| 102 | 8 | double | rad | inc | Inclination |
| 110 | 8 | double | rad/s | inc_dot | Inclination first derivative |
| 118 | 4 | float | s | af0 | Polynomial clock correction coefficient (clock bias) |
| 122 | 4 | float | s/s | af1 | Polynomial clock correction coefficient (clock drift) |
| 126 | 4 | float | s/s^2 | af2 | Polynomial clock correction coefficient (rate of clock drift) |
| 130 | 4 | u32 | s | toc.tow | Seconds since start of GPS week |
| 134 | 2 | u16 | week | toc.wn | GPS week number |
| 136 | 1 | u8 | | iode | Issue of ephemeris data |
| 137 | 2 | u16 | | iodc | Issue of clock data |
| 139 | | | | | Total Payload Length |

Table 6.6.14: MSG_EPHEMERIS_GPS 0x008A message structure



Field 6.6.5: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.15: values (common.sid.code[0:7])

MSG_EPHEMERIS_QZSS — 0x008E — 142

The ephemeris message returns a set of satellite orbit parameters that is used to calculate QZSS satellite position, velocity, and clock offset.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------|----------------|--|
| 0 | 1 | u8 | | common.sid.sac | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.cof | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.tot | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 4 | float | m | common.ura | User Range Accuracy |
| 12 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 16 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 17 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 18 | 4 | float | s | tgdt | Group delay differential between L1 and L2 |
| 22 | 4 | float | m | c_rsr | Amplitude of the sine harmonic correction term to the orbit radius |
| 26 | 4 | float | m | c_rrc | Amplitude of the cosine harmonic correction term to the orbit radius |
| 30 | 4 | float | rad | c_ucr | Amplitude of the cosine harmonic correction term to the argument of latitude |
| 34 | 4 | float | rad | c_usr | Amplitude of the sine harmonic correction term to the argument of latitude |
| 38 | 4 | float | rad | c_icr | Amplitude of the cosine harmonic correction term to the angle of inclination |
| 42 | 4 | float | rad | c_isr | Amplitude of the sine harmonic correction term to the angle of inclination |
| 46 | 8 | double | rad/s | dn | Mean motion difference |
| 54 | 8 | double | rad | m0 | Mean anomaly at reference time |
| 62 | 8 | double | | ecc | Eccentricity of satellite orbit |
| 70 | 8 | double | m^(1/2) | sqrta | Square root of the semi-major axis of orbit |
| 78 | 8 | double | rad | omega0 | Longitude of ascending node of orbit plane at weekly epoch |
| 86 | 8 | double | rad/s | omegadot | Rate of right ascension |
| 94 | 8 | double | rad | w | Argument of perigee |
| 102 | 8 | double | rad | inc | Inclination |
| 110 | 8 | double | rad/s | inc_dot | Inclination first derivative |
| 118 | 4 | float | s | af0 | Polynomial clock correction coefficient (clock bias) |
| 122 | 4 | float | s/s | af1 | Polynomial clock correction coefficient (clock drift) |
| 126 | 4 | float | s/s^2 | af2 | Polynomial clock correction coefficient (rate of clock drift) |
| 130 | 4 | u32 | s | toc.tow | Seconds since start of GPS week |
| 134 | 2 | u16 | week | toc.wn | GPS week number |
| 136 | 1 | u8 | | iode | Issue of ephemeris data |
| 137 | 2 | u16 | | iodc | Issue of clock data |
| 139 | | | | | Total Payload Length |

Table 6.6.16: MSG_EPHEMERIS_QZSS 0x008E message structure



Field 6.6.6: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.17: values (common.sid.code[0:7])

MSG_EPHEMERIS_BDS — 0x0089 — 137

The ephemeris message returns a set of satellite orbit parameters that is used to calculate BDS satellite position, velocity, and clock offset. Please see the BeiDou Navigation Satellite System SIS-ICD Version 2.1, Table 5-9 for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------|-----------------|--|
| 0 | 1 | u8 | | common.sid.sas | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.tow | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 4 | float | m | common.ura | User Range Accuracy |
| 12 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 16 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 17 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 18 | 4 | float | s | tgdl | Group delay differential for B1 |
| 22 | 4 | float | s | tgdl | Group delay differential for B2 |
| 26 | 4 | float | m | c_rs | Amplitude of the sine harmonic correction term to the orbit radius |
| 30 | 4 | float | m | c_rc | Amplitude of the cosine harmonic correction term to the orbit radius |
| 34 | 4 | float | rad | c_uc | Amplitude of the cosine harmonic correction term to the argument of latitude |
| 38 | 4 | float | rad | c_us | Amplitude of the sine harmonic correction term to the argument of latitude |
| 42 | 4 | float | rad | c_ic | Amplitude of the cosine harmonic correction term to the angle of inclination |
| 46 | 4 | float | rad | c_is | Amplitude of the sine harmonic correction term to the angle of inclination |
| 50 | 8 | double | rad/s | dn | Mean motion difference |
| 58 | 8 | double | rad | m0 | Mean anomaly at reference time |
| 66 | 8 | double | | ecc | Eccentricity of satellite orbit |
| 74 | 8 | double | m^(1/2) | sqrta | Square root of the semi-major axis of orbit |
| 82 | 8 | double | rad | omega0 | Longitude of ascending node of orbit plane at weekly epoch |
| 90 | 8 | double | rad/s | omegadot | Rate of right ascension |
| 98 | 8 | double | rad | w | Argument of perigee |
| 106 | 8 | double | rad | inc | Inclination |
| 114 | 8 | double | rad/s | inc_dot | Inclination first derivative |
| 122 | 8 | double | s | af0 | Polynomial clock correction coefficient (clock bias) |
| 130 | 4 | float | s/s | af1 | Polynomial clock correction coefficient (clock drift) |
| 134 | 4 | float | s/s^2 | af2 | Polynomial clock correction coefficient (rate of clock drift) |
| 138 | 4 | u32 | s | toc.tow | Seconds since start of GPS week |
| 142 | 2 | u16 | week | toc.wn | GPS week number |
| 144 | 1 | u8 | | iode | Issue of ephemeris data |
| 145 | 2 | u16 | | iodc | Issue of clock data |
| 147 | | | | | Total Payload Length |

Table 6.6.18: MSG_EPHEMERIS_BDS 0x0089 message structure



Field 6.6.7: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.19: values (common.sid.code[0:7])

MSG_EPHEMERIS_GAL_DEP_A — 0x0095 — 149

This observation message has been deprecated in favor of an ephemeris message with explicit source of NAV data.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------|-----------------|--|
| 0 | 1 | u8 | | common.sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.tow | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 4 | float | m | common.ura | User Range Accuracy |
| 12 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 16 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 17 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 18 | 4 | float | s | bgd_e1e5a | E1-E5a Broadcast Group Delay |
| 22 | 4 | float | s | bgd_e1e5b | E1-E5b Broadcast Group Delay |
| 26 | 4 | float | m | c_rs | Amplitude of the sine harmonic correction term to the orbit radius |
| 30 | 4 | float | m | c_rc | Amplitude of the cosine harmonic correction term to the orbit radius |
| 34 | 4 | float | rad | c_uc | Amplitude of the cosine harmonic correction term to the argument of latitude |
| 38 | 4 | float | rad | c_us | Amplitude of the sine harmonic correction term to the argument of latitude |
| 42 | 4 | float | rad | c_ic | Amplitude of the cosine harmonic correction term to the angle of inclination |
| 46 | 4 | float | rad | c_is | Amplitude of the sine harmonic correction term to the angle of inclination |
| 50 | 8 | double | rad/s | dn | Mean motion difference |
| 58 | 8 | double | rad | m0 | Mean anomaly at reference time |
| 66 | 8 | double | | ecc | Eccentricity of satellite orbit |
| 74 | 8 | double | m^(1/2) | sqrta | Square root of the semi-major axis of orbit |
| 82 | 8 | double | rad | omega0 | Longitude of ascending node of orbit plane at weekly epoch |
| 90 | 8 | double | rad/s | omegadot | Rate of right ascension |
| 98 | 8 | double | rad | w | Argument of perigee |
| 106 | 8 | double | rad | inc | Inclination |
| 114 | 8 | double | rad/s | inc_dot | Inclination first derivative |
| 122 | 8 | double | s | af0 | Polynomial clock correction coefficient (clock bias) |
| 130 | 8 | double | s/s | af1 | Polynomial clock correction coefficient (clock drift) |
| 138 | 4 | float | s/s^2 | af2 | Polynomial clock correction coefficient (rate of clock drift) |
| 142 | 4 | u32 | s | toc.tow | Seconds since start of GPS week |
| 146 | 2 | u16 | week | toc.wn | GPS week number |
| 148 | 2 | u16 | | iode | Issue of ephemeris data |
| 150 | 2 | u16 | | iodc | Issue of clock data |
| 152 | | | | | Total Payload Length |

Table 6.6.20: MSG_EPHEMERIS_GAL_DEP_A 0x0095 message structure



Field 6.6.8: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.21: values (common.sid.code[0:7])

MSG_EPHEMERIS_GAL — 0x008D — 141

The ephemeris message returns a set of satellite orbit parameters that is used to calculate Galileo satellite position, velocity, and clock offset. Please see the Signal In Space ICD OS SIS ICD, Issue 1.3, December 2016 for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------------|------------------------------|--|
| 0 | 1 | u8 | | <code>common.sid.sat</code> | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | <code>common.sid.code</code> | Signal constellation, band and code |
| 2 | 4 | u32 | s | <code>common.toe.tot</code> | Seconds since start of GPS week |
| 6 | 2 | u16 | week | <code>common.toe.wn</code> | GPS week number |
| 8 | 4 | float | m | <code>common.ura</code> | User Range Accuracy |
| 12 | 4 | u32 | s | <code>common.fit_int</code> | Curve fit interval |
| 16 | 1 | u8 | | <code>common.valid</code> | Status of ephemeris, 1 = valid, 0 = invalid |
| 17 | 1 | u8 | | <code>common.health</code> | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 18 | 4 | float | s | <code>bgd_e1e5a</code> | E1-E5a Broadcast Group Delay |
| 22 | 4 | float | s | <code>bgd_e1e5b</code> | E1-E5b Broadcast Group Delay |
| 26 | 4 | float | m | <code>c_rs</code> | Amplitude of the sine harmonic correction term to the orbit radius |
| 30 | 4 | float | m | <code>c_rc</code> | Amplitude of the cosine harmonic correction term to the orbit radius |
| 34 | 4 | float | rad | <code>c_uc</code> | Amplitude of the cosine harmonic correction term to the argument of latitude |
| 38 | 4 | float | rad | <code>c_us</code> | Amplitude of the sine harmonic correction term to the argument of latitude |
| 42 | 4 | float | rad | <code>c_ic</code> | Amplitude of the cosine harmonic correction term to the angle of inclination |
| 46 | 4 | float | rad | <code>c_is</code> | Amplitude of the sine harmonic correction term to the angle of inclination |
| 50 | 8 | double | rad/s | <code>dn</code> | Mean motion difference |
| 58 | 8 | double | rad | <code>m0</code> | Mean anomaly at reference time |
| 66 | 8 | double | | <code>ecc</code> | Eccentricity of satellite orbit |
| 74 | 8 | double | $m^{(1/2)}$ | <code>sqrta</code> | Square root of the semi-major axis of orbit |
| 82 | 8 | double | rad | <code>omega0</code> | Longitude of ascending node of orbit plane at weekly epoch |
| 90 | 8 | double | rad/s | <code>omegadot</code> | Rate of right ascension |
| 98 | 8 | double | rad | <code>w</code> | Argument of perigee |
| 106 | 8 | double | rad | <code>inc</code> | Inclination |
| 114 | 8 | double | rad/s | <code>inc_dot</code> | Inclination first derivative |
| 122 | 8 | double | s | <code>af0</code> | Polynomial clock correction coefficient (clock bias) |
| 130 | 8 | double | s/s | <code>af1</code> | Polynomial clock correction coefficient (clock drift) |
| 138 | 4 | float | s/s^2 | <code>af2</code> | Polynomial clock correction coefficient (rate of clock drift) |
| 142 | 4 | u32 | s | <code>toc.tow</code> | Seconds since start of GPS week |
| 146 | 2 | u16 | week | <code>toc.wn</code> | GPS week number |
| 148 | 2 | u16 | | <code>iode</code> | Issue of ephemeris data |
| 150 | 2 | u16 | | <code>iodc</code> | Issue of clock data |
| 152 | 1 | u8 | | <code>source</code> | 0=I/NAV, 1=F/NAV, ... |
| 153 | | | | | Total Payload Length |

Table 6.6.22: MSG_EPHEMERIS_GAL 0x008D message structure



Field 6.6.9: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.23: values (common.sid.code[0:7])

MSG_EPHEMERIS_SBAS_DEP_A — 0x0082 — 130

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|-----------|-------|---------------------|---|
| 0 | 2 | u16 | | common.sid.sat | Constellation-specific satellite identifier. Note: unlike GnssSignal, GPS satellites are encoded as (PRN - 1). Other constellations do not have this offset. |
| 2 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 3 | 1 | u8 | | common.sid.reserved | Reserved |
| 4 | 4 | u32 | ms | common.toe.toe | Milliseconds since start of GPS week |
| 8 | 2 | u16 | week | common.toe.wn | GPS week number |
| 10 | 8 | double | m | common.ura | User Range Accuracy |
| 18 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 22 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 23 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 24 | 24 | double[3] | m | pos | Position of the GEO at time toe |
| 48 | 24 | double[3] | m/s | vel | Velocity of the GEO at time toe |
| 72 | 24 | double[3] | m/s^2 | acc | Acceleration of the GEO at time toe |
| 96 | 8 | double | s | a_gf0 | Time offset of the GEO clock w.r.t. SBAS Network Time |
| 104 | 8 | double | s/s | a_gf1 | Drift of the GEO clock w.r.t. SBAS Network Time |
| 112 | | | | | Total Payload Length |

Table 6.6.24: MSG_EPHEMERIS_SBAS_DEP_A 0x0082 message structure

(Table 6.6.25)

70

Field 6.6.10: Signal constellation, band and code (common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |

Table 6.6.25: values (common.sid.code[0:7])

MSG_EPHEMERIS_GLO_DEP_A — 0x0083 — 131

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GLO satellite position, velocity, and clock offset. Please see the GLO ICD 5.1 "Table 4.5 Characteristics of words of immediate information (ephemeris parameters)" for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|-----------|-------|---------------------|---|
| 0 | 2 | u16 | | common.sid.sat | Constellation-specific satellite identifier. Note: unlike GnssSignal, GPS satellites are encoded as (PRN - 1). Other constellations do not have this offset. |
| 2 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 3 | 1 | u8 | | common.sid.reserved | Reserved |
| 4 | 4 | u32 | ms | common.toe.tb | Milliseconds since start of GPS week |
| 8 | 2 | u16 | week | common.toe.wn | GPS week number |
| 10 | 8 | double | m | common.ura | User Range Accuracy |
| 18 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 22 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 23 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 24 | 8 | double | | gamma | Relative deviation of predicted carrier frequency from nominal |
| 32 | 8 | double | s | tau | Correction to the SV time |
| 40 | 24 | double[3] | m | pos | Position of the SV at tb in PZ-90.02 coordinates system |
| 64 | 24 | double[3] | m/s | vel | Velocity vector of the SV at tb in PZ-90.02 coordinates system |
| 88 | 24 | double[3] | m/s^2 | acc | Acceleration vector of the SV at tb in PZ-90.02 coordinates sys |
| 112 | | | | | Total Payload Length |

Table 6.6.26: MSG_EPHEMERIS_GLO_DEP_A 0x0083 message structure

(Table 6.6.27)

7

0

Field 6.6.11: Signal constellation, band and code (common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |

Table 6.6.27: values (common.sid.code[0:7])

MSG_EPHEMERIS_SBAS_DEP_B — 0x0084 — 132

This observation message has been deprecated in favor of ephemeris message using floats for size reduction.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|-----------|-------|----------------|--|
| 0 | 1 | u8 | | common.sid.sa | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.co | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.to | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 8 | double | m | common.ura | User Range Accuracy |
| 16 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 20 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 21 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 Others: 0 = valid, non-zero = invalid |
| 22 | 24 | double[3] | m | pos | Position of the GEO at time toe |
| 46 | 24 | double[3] | m/s | vel | Velocity of the GEO at time toe |
| 70 | 24 | double[3] | m/s^2 | acc | Acceleration of the GEO at time toe |
| 94 | 8 | double | s | a_gf0 | Time offset of the GEO clock w.r.t. SBAS Network Time |
| 102 | 8 | double | s/s | a_gf1 | Drift of the GEO clock w.r.t. SBAS Network Time |
| 110 | | | | | Total Payload Length |

Table 6.6.28: MSG_EPHEMERIS_SBAS_DEP_B 0x0084 message structure

(Table 6.6.29)

7

0

Field 6.6.12: Signal constellation, band and code (common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.29: values (common.sid.code[0:7])

MSG_EPHEMERIS_SBAS — 0x008C — 140

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|-----------|-------|-----------------|--|
| 0 | 1 | u8 | | common.sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.toe | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 4 | float | m | common.ura | User Range Accuracy |
| 12 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 16 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 17 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 18 | 24 | double[3] | m | pos | Position of the GEO at time toe |
| 42 | 12 | float[3] | m/s | vel | Velocity of the GEO at time toe |
| 54 | 12 | float[3] | m/s^2 | acc | Acceleration of the GEO at time toe |
| 66 | 4 | float | s | a_gf0 | Time offset of the GEO clock w.r.t. SBAS Network Time |
| 70 | 4 | float | s/s | a_gf1 | Drift of the GEO clock w.r.t. SBAS Network Time |
| 74 | | | | | Total Payload Length |

Table 6.6.30: MSG_EPHEMERIS_SBAS 0x008C message structure

(Table 6.6.31)

7

0

Field 6.6.13: Signal constellation, band and code (common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.31: values (common.sid.code[0:7])

MSG_EPHEMERIS_GLO_DEP_B — 0x0085 — 133

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GLO satellite position, velocity, and clock offset. Please see the GLO ICD 5.1 "Table 4.5 Characteristics of words of immediate information (ephemeris parameters)" for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|-----------|-------|-----------------|--|
| 0 | 1 | u8 | | common.sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.tb | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 8 | double | m | common.ura | User Range Accuracy |
| 16 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 20 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 21 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 Others: 0 = valid, non-zero = invalid |
| 22 | 8 | double | | gamma | Relative deviation of predicted carrier frequency from nominal |
| 30 | 8 | double | s | tau | Correction to the SV time |
| 38 | 24 | double[3] | m | pos | Position of the SV at tb in PZ-90.02 coordinates system |
| 62 | 24 | double[3] | m/s | vel | Velocity vector of the SV at tb in PZ-90.02 coordinates system |
| 86 | 24 | double[3] | m/s^2 | acc | Acceleration vector of the SV at tb in PZ-90.02 coordinates sys |
| 110 | | | | | Total Payload Length |

Table 6.6.32: MSG_EPHEMERIS_GLO_DEP_B 0x0085 message structure

(Table 6.6.33)

7

0

Field 6.6.14: Signal constellation, band and code (common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.33: values (common.sid.code[0:7])

MSG_EPHEMERIS_GLO_DEP_C — 0x0087 — 135

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GLO satellite position, velocity, and clock offset. Please see the GLO ICD 5.1 "Table 4.5 Characteristics of words of immediate information (ephemeris parameters)" for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|-----------|-------|-----------------|--|
| 0 | 1 | u8 | | common.sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.code | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.toe | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 8 | double | m | common.ura | User Range Accuracy |
| 16 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 20 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 21 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 Others: 0 = valid, non-zero = invalid |
| 22 | 8 | double | | gamma | Relative deviation of predicted carrier frequency from nominal |
| 30 | 8 | double | s | tau | Correction to the SV time |
| 38 | 8 | double | s | d_tau | Equipment delay between L1 and L2 |
| 46 | 24 | double[3] | m | pos | Position of the SV at tb in PZ-90.02 coordinates system |
| 70 | 24 | double[3] | m/s | vel | Velocity vector of the SV at tb in PZ-90.02 coordinates system |
| 94 | 24 | double[3] | m/s^2 | acc | Acceleration vector of the SV at tb in PZ-90.02 coordinates sys |
| 118 | 1 | u8 | | fcn | Frequency slot. FCN+8 (that is [1..14]). 0 or 0xFF for invalid |
| 119 | | | | | Total Payload Length |

Table 6.6.34: MSG_EPHEMERIS_GLO_DEP_C 0x0087 message structure



Field 6.6.15: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.35: values (common.sid.code[0:7])

MSG_EPHEMERIS_GLO_DEP_D — 0x0088 — 136

This observation message has been deprecated in favor of ephemeris message using floats for size reduction.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|-----------|-------|----------------|--|
| 0 | 1 | u8 | | common.sid.sa | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.co | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toe.to | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toe.wn | GPS week number |
| 8 | 8 | double | m | common.ura | User Range Accuracy |
| 16 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 20 | 1 | u8 | | common.valid | Status of ephemeris, 1 = valid, 0 = invalid |
| 21 | 1 | u8 | | common.health | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 Others: 0 = valid, non-zero = invalid |
| 22 | 8 | double | | gamma | Relative deviation of predicted carrier frequency from nominal |
| 30 | 8 | double | s | tau | Correction to the SV time |
| 38 | 8 | double | s | d_tau | Equipment delay between L1 and L2 |
| 46 | 24 | double[3] | m | pos | Position of the SV at tb in PZ-90.02 coordinates system |
| 70 | 24 | double[3] | m/s | vel | Velocity vector of the SV at tb in PZ-90.02 coordinates system |
| 94 | 24 | double[3] | m/s^2 | acc | Acceleration vector of the SV at tb in PZ-90.02 coordinates sys |
| 118 | 1 | u8 | | fcn | Frequency slot. FCN+8 (that is [1..14]). 0 or 0xFF for invalid |
| 119 | 1 | u8 | | iod | Issue of ephemeris data |
| 120 | | | | | Total Payload Length |

Table 6.6.36: MSG_EPHEMERIS_GLO_DEP_D 0x0088 message structure



Field 6.6.16: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.37: values (common.sid.code[0:7])

MSG_EPHEMERIS_GLO — 0x008B — 139

The ephemeris message returns a set of satellite orbit parameters that is used to calculate GLO satellite position, velocity, and clock offset. Please see the GLO ICD 5.1 "Table 4.5 Characteristics of words of immediate information (ephemeris parameters)" for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|-----------|------------------|-----------------------------|--|
| 0 | 1 | u8 | | <code>common.sid.sac</code> | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | <code>common.sid.cof</code> | Signal constellation, band and code |
| 2 | 4 | u32 | s | <code>common.toe.to</code> | Seconds since start of GPS week |
| 6 | 2 | u16 | week | <code>common.toe.wn</code> | GPS week number |
| 8 | 4 | float | m | <code>common.ura</code> | User Range Accuracy |
| 12 | 4 | u32 | s | <code>common.fit.int</code> | Curve fit interval |
| 16 | 1 | u8 | | <code>common.valid</code> | Status of ephemeris, 1 = valid, 0 = invalid |
| 17 | 1 | u8 | | <code>common.health</code> | Satellite health status. GPS: ICD-GPS-200, chapter 20.3.3.3.1.4 SBAS: 0 = valid, non-zero = invalid GLO: 0 = valid, non-zero = invalid |
| 18 | 4 | float | | <code>gamma</code> | Relative deviation of predicted carrier frequency from nominal |
| 22 | 4 | float | s | <code>tau</code> | Correction to the SV time |
| 26 | 4 | float | s | <code>d_tau</code> | Equipment delay between L1 and L2 |
| 30 | 24 | double[3] | m | <code>pos</code> | Position of the SV at tb in PZ-90.02 coordinates system |
| 54 | 24 | double[3] | m/s | <code>vel</code> | Velocity vector of the SV at tb in PZ-90.02 coordinates system |
| 78 | 12 | float[3] | m/s ² | <code>acc</code> | Acceleration vector of the SV at tb in PZ-90.02 coordinates sys |
| 90 | 1 | u8 | | <code>fcn</code> | Frequency slot. FCN+8 (that is [1..14]). 0 or 0xFF for invalid |
| 91 | 1 | u8 | | <code>iod</code> | Issue of ephemeris data |
| 92 | | | | | Total Payload Length |

Table 6.6.38: MSG_EPHEMERIS_GLO 0x008B message structure



Field 6.6.17: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.39: values (common.sid.code[0:7])

MSG_IONO — 0x0090 — 144

The ionospheric parameters which allow the "L1 only" or "L2 only" user to utilize the ionospheric model for computation of the ionospheric delay. Please see ICD-GPS-200 (Chapter 20.3.3.5.1.7) for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|------------------------------|-------------------------|---------------------------------|
| 0 | 4 | u32 | s | <code>t_nmct.tow</code> | Seconds since start of GPS week |
| 4 | 2 | u16 | week | <code>t_nmct.wn</code> | GPS week number |
| 6 | 8 | double | s | <code>a0</code> | |
| 14 | 8 | double | s/semi-circle | <code>a1</code> | |
| 22 | 8 | double | s/(semi-circle) ² | <code>a2</code> | |
| 30 | 8 | double | s/(semi-circle) ³ | <code>a3</code> | |
| 38 | 8 | double | s | <code>b0</code> | |
| 46 | 8 | double | s/semi-circle | <code>b1</code> | |
| 54 | 8 | double | s/(semi-circle) ² | <code>b2</code> | |
| 62 | 8 | double | s/(semi-circle) ³ | <code>b3</code> | |
| 70 | | | | | Total Payload Length |

Table 6.6.40: MSG_IONO 0x0090 message structure

MSG_SV_CONFIGURATION_GPS_DEP — 0x0091 — 145

Please see ICD-GPS-200 (Chapter 20.3.3.5.1.4) for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------------------------|--|
| 0 | 4 | u32 | s | <code>t_nmct.tow</code> | Seconds since start of GPS week |
| 4 | 2 | u16 | week | <code>t_nmct.wn</code> | GPS week number |
| 6 | 4 | u32 | | <code>l2c_mask</code> | L2C capability mask, SV32 bit being MSB, SV1 bit being LSB |
| | 10 | | | | Total Payload Length |

Table 6.6.41: MSG_SV_CONFIGURATION_GPS_DEP 0x0091 message structure

MSG_GNSS_CAPB — 0x0096 — 150

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------------|---|
| 0 | 4 | u32 | s | t_nmct.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | t_nmct.wn | GPS week number |
| 6 | 8 | u64 | | gc.gps_active | GPS SV active mask |
| 14 | 8 | u64 | | gc.gps_l2c | GPS L2C active mask |
| 22 | 8 | u64 | | gc.gps_l5 | GPS L5 active mask |
| 30 | 4 | u32 | | gc.glo_active | GLO active mask |
| 34 | 4 | u32 | | gc.glo_l2of | GLO L2OF active mask |
| 38 | 4 | u32 | | gc.glo_l3 | GLO L3 active mask |
| 42 | 8 | u64 | | gc.sbas_active | SBAS active mask (PRNs 120..158, AN 7/62.2.2-18/18 Table B-23, https://www.caat.or.th/wp-content/uploads/2018/03/SL-2018.18.E-1.pdf) |
| 50 | 8 | u64 | | gc.sbas_l5 | SBAS L5 active mask (PRNs 120..158, AN 7/62.2.2-18/18 Table B-23, https://www.caat.or.th/wp-content/uploads/2018/03/SL-2018.18.E-1.pdf) |
| 58 | 8 | u64 | | gc.bds_active | BDS active mask |
| 66 | 8 | u64 | | gc.bds_d2nav | BDS D2NAV active mask |
| 74 | 8 | u64 | | gc.bds_b2 | BDS B2 active mask |
| 82 | 8 | u64 | | gc.bds_b2a | BDS B2A active mask |
| 90 | 4 | u32 | | gc.qzss_active | QZSS active mask |
| 94 | 8 | u64 | | gc.gal_active | GAL active mask |
| 102 | 8 | u64 | | gc.gal_e5 | GAL E5 active mask |
| 110 | | | | | Total Payload Length |

Table 6.6.42: MSG_GNSS_CAPB 0x0096 message structure

MSG_GROUP_DELAY_DEP_A — 0x0092 — 146

Please see ICD-GPS-200 (30.3.3.3.1.1) for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------------------|----------------------|---|
| 0 | 4 | u32 | ms | t _{op} .tow | Milliseconds since start of GPS week |
| 4 | 2 | u16 | week | t _{op} .wn | GPS week number |
| 6 | 1 | u8 | | prn | Satellite number |
| 7 | 1 | u8 | | valid | bit-field indicating validity of the values, LSB indicating tgd validity etc. 1 = value is valid, 0 = value is not valid. |
| 8 | 2 | s16 | s * 2 ⁻³⁵ | tgd | |
| 10 | 2 | s16 | s * 2 ⁻³⁵ | isc _{11ca} | |
| 12 | 2 | s16 | s * 2 ⁻³⁵ | isc _{12c} | |
| 14 | | | | | Total Payload Length |

Table 6.6.43: MSG_GROUP_DELAY_DEP_A 0x0092 message structure

MSG_GROUP_DELAY_DEP_B — 0x0093 — 147

Please see ICD-GPS-200 (30.3.3.3.1.1) for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-----------|--------------|---|
| 0 | 4 | u32 | s | t_op.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | t_op.wn | GPS week number |
| 6 | 2 | u16 | | sid.sat | Constellation-specific satellite identifier. Note: unlike GnssSignal, GPS satellites are encoded as (PRN - 1). Other constellations do not have this offset. |
| 8 | 1 | u8 | | sid.code | Signal constellation, band and code |
| 9 | 1 | u8 | | sid.reserved | Reserved |
| 10 | 1 | u8 | | valid | bit-field indicating validity of the values, LSB indicating tgd validity etc. 1 = value is valid, 0 = value is not valid. |
| 11 | 2 | s16 | s * 2^-35 | tgd | |
| 13 | 2 | s16 | s * 2^-35 | isc_l1ca | |
| 15 | 2 | s16 | s * 2^-35 | isc_l2c | |
| 17 | | | | | Total Payload Length |

Table 6.6.44: MSG_GROUP_DELAY_DEP_B 0x0093 message structure

(Table 6.6.45)

7

0

Field 6.6.18: Signal constellation, band and code (sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |

Table 6.6.45: values (sid.code[0:7])

MSG_GROUP_DELAY — 0x0094 — 148

Please see ICD-GPS-200 (30.3.3.3.1.1) for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------------------|----------|---|
| 0 | 4 | u32 | s | t_op.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | t_op.wn | GPS week number |
| 6 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 7 | 1 | u8 | | sid.code | Signal constellation, band and code |
| 8 | 1 | u8 | | valid | bit-field indicating validity of the values, LSB indicating tgd validity etc. 1 = value is valid, 0 = value is not valid. |
| 9 | 2 | s16 | s * 2 ⁻³⁵ | tgd | |
| 11 | 2 | s16 | s * 2 ⁻³⁵ | isc_l1ca | |
| 13 | 2 | s16 | s * 2 ⁻³⁵ | isc_l2c | |
| 15 | | | | | Total Payload Length |

Table 6.6.46: MSG_GROUP_DELAY 0x0094 message structure

(Table 6.6.47)

7

0

Field 6.6.19: Signal constellation, band and code (sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.47: values (sid.code[0:7])

MSG_ALMANAC_GPS — 0x0072 — 114

The almanac message returns a set of satellite orbit parameters. Almanac data is not very precise and is considered valid for up to several months. Please see the Navstar GPS Space Segment/Navigation user interfaces (ICD-GPS-200, Chapter 20.3.3.5.1.2 Almanac Data) for more details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------|----------------|--|
| 0 | 1 | u8 | | common.sid.sac | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | common.sid.cof | Signal constellation, band and code |
| 2 | 4 | u32 | s | common.toa.tot | Seconds since start of GPS week |
| 6 | 2 | u16 | week | common.toa.wn | GPS week number |
| 8 | 8 | double | m | common.ura | User Range Accuracy |
| 16 | 4 | u32 | s | common.fit.int | Curve fit interval |
| 20 | 1 | u8 | | common.valid | Status of almanac, 1 = valid, 0 = invalid |
| 21 | 1 | u8 | | common.health | Satellite health status for GPS: - bits 5-7: NAV data health status. See IS-GPS-200H Table 20-VII: NAV Data Health Indications. - bits 0-4: Signal health status. See IS-GPS-200H Table 20-VIII. Codes for Health of SV Signal Components. Satellite health status for GLO: See GLO ICD 5.1 table 5.1 for details - bit 0: C(n), "unhealthy" flag that is transmitted within non-immediate data and indicates overall constellation status at the moment of almanac uploading. '0' indicates malfunction of n-satellite. '1' indicates that n-satellite is operational. - bit 1: Bn(In), '0' indicates the satellite is operational and suitable for navigation. |
| 22 | 8 | double | rad | m0 | Mean anomaly at reference time |
| 30 | 8 | double | | ecc | Eccentricity of satellite orbit |
| 38 | 8 | double | m^(1/2) | sqrrta | Square root of the semi-major axis of orbit |
| 46 | 8 | double | rad | omega0 | Longitude of ascending node of orbit plane at weekly epoch |
| 54 | 8 | double | rad/s | omegadot | Rate of right ascension |
| 62 | 8 | double | rad | w | Argument of perigee |
| 70 | 8 | double | rad | inc | Inclination |
| 78 | 8 | double | s | af0 | Polynomial clock correction coefficient (clock bias) |
| 86 | 8 | double | s/s | af1 | Polynomial clock correction coefficient (clock drift) |
| 94 | | | | | Total Payload Length |

Table 6.6.48: MSG_ALMANAC_GPS 0x0072 message structure



Field 6.6.20: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |


Table 6.6.49: values (common.sid.code[0:7])

MSG_ALMANAC_GLO — 0x0073 — 115

The almanac message returns a set of satellite orbit parameters. Almanac data is not very precise and is considered valid for up to several months. Please see the GLO ICD 5.1 "Chapter 4.5 Non-immediate information and almanac" for details.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------------------------------|------------------------------|--|
| 0 | 1 | u8 | | <code>common.sid.sat</code> | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | <code>common.sid.code</code> | Signal constellation, band and code |
| 2 | 4 | u32 | s | <code>common.toa.to</code> | Seconds since start of GPS week |
| 6 | 2 | u16 | week | <code>common.toa.wn</code> | GPS week number |
| 8 | 8 | double | m | <code>common.ura</code> | User Range Accuracy |
| 16 | 4 | u32 | s | <code>common.fit.int</code> | Curve fit interval |
| 20 | 1 | u8 | | <code>common.valid</code> | Status of almanac, 1 = valid, 0 = invalid |
| 21 | 1 | u8 | | <code>common.health</code> | Satellite health status for GPS: - bits 5-7: NAV data health status. See IS-GPS-200H Table 20-VII: NAV Data Health Indications. - bits 0-4: Signal health status. See IS-GPS-200H Table 20-VIII. Codes for Health of SV Signal Components. Satellite health status for GLO: See GLO ICD 5.1 table 5.1 for details - bit 0: C(n), "unhealthy" flag that is transmitted within non-immediate data and indicates overall constellation status at the moment of almanac uploading. '0' indicates malfunction of n-satellite. '1' indicates that n-satellite is operational. - bit 1: Bn(In), '0' indicates the satellite is operational and suitable for navigation. |
| 22 | 8 | double | rad | <code>lambda_na</code> | Longitude of the first ascending node of the orbit in PZ-90.02 coordinate system |
| 30 | 8 | double | s | <code>t_lambda_na</code> | Time of the first ascending node passage |
| 38 | 8 | double | rad | <code>i</code> | Value of inclination at instant of <code>t_lambda</code> |
| 46 | 8 | double | s/orbital period | <code>t</code> | Value of Draconian period at instant of <code>t_lambda</code> |
| 54 | 8 | double | s/(orbital period ²) | <code>t_dot</code> | Rate of change of the Draconian period |
| 62 | 8 | double | | <code>epsilon</code> | Eccentricity at instant of <code>t_lambda</code> |
| 70 | 8 | double | rad | <code>omega</code> | Argument of perigee at instant of <code>t_lambda</code> |
| | | | | | Total Payload Length |
| 78 | | | | | |

Table 6.6.50: MSG_ALMANAC_GLO 0x0073 message structure



Field 6.6.21: Signal constellation, band and code
(common.sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.51: values (common.sid.code[0:7])

MSG_GLO_BIASES — 0x0075 — 117

The GLONASS L1/L2 Code-Phase biases allows to perform GPS+GLONASS integer ambiguity resolution for baselines with mixed receiver types (e.g. receiver of different manufacturers)

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|--------------|--------|----------|-----------|--------------------------------|
| 0 | 1 | u8 | boolean | mask | GLONASS FDMA signals mask |
| 1 | 2 | s16 | m * 0.02 | l1ca_bias | GLONASS L1 C/A Code-Phase Bias |
| 3 | 2 | s16 | m * 0.02 | l1p_bias | GLONASS L1 P Code-Phase Bias |
| 5 | 2 | s16 | m * 0.02 | l2ca_bias | GLONASS L2 C/A Code-Phase Bias |
| 7 | 2 | s16 | m * 0.02 | l2p_bias | GLONASS L2 P Code-Phase Bias |
| 9 | | | | | Total Payload Length |

Table 6.6.52: MSG_GLO_BIASES 0x0075 message structure

MSG_SV_AZ_EL — 0x0097 — 151

Azimuth and elevation angles of all the visible satellites that the device does have ephemeris or almanac for.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------|-------------------------------|--|
| $4N + 0$ | 1 | u8 | | <code>azel[N].sid</code> | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| $4N + 1$ | 1 | u8 | | <code>azel[N].sid.code</code> | Signal constellation, band and code |
| $4N + 2$ | 1 | u8 | deg * 2 | <code>azel[N].az</code> | Azimuth angle (range 0..179) |
| $4N + 3$ | 1 | s8 | deg | <code>azel[N].el</code> | Elevation angle (range -90..90) |
| $4N$ | | | | | Total Payload Length |

Table 6.6.53: MSG_SV_AZ_EL 0x0097 message structure

(Table 6.6.54)

7

0

Field 6.6.22: Signal constellation, band and code (`sid.code`)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |


Table 6.6.54: values (`sid.code[0:7]`)

MSG_OSR — 0x0640 — 1600

The OSR message contains network corrections in an observation-like format

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|--------------|----------------------|--|
| 0 | 4 | u32 | ms | header.t.tow | Milliseconds since start of GPS week |
| 4 | 4 | s32 | ns | header.t.ns_residual | Nanosecond residual of millisecond-rounded TOW (ranges from -500000 to 500000) |
| 8 | 2 | u16 | week | header.t.wn | GPS week number |
| 10 | 1 | u8 | | header.n_obs | Total number of observations. First nibble is the size of the sequence (n), second nibble is the zero-indexed counter (ith packet of n) |
| 19N + 11 | 4 | u32 | 2 cm | obs[N].P | Pseudorange observation |
| 19N + 15 | 4 | s32 | cycles | obs[N].L.i | Carrier phase whole cycles |
| 19N + 19 | 1 | u8 | cycles / 256 | obs[N].L.f | Carrier phase fractional part |
| 19N + 20 | 1 | u8 | | obs[N].lock | Lock timer. This value gives an indication of the time for which a signal has maintained continuous phase lock. Whenever a signal has lost and regained lock, this value is reset to zero. It is encoded according to DF402 from the RTCM 10403.2 Amendment 2 specification. Valid values range from 0 to 15 and the most significant nibble is reserved for future use. |
| 19N + 21 | 1 | u8 | | obs[N].flags | Correction flags. |
| 19N + 22 | 1 | u8 | | obs[N].sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 19N + 23 | 1 | u8 | | obs[N].sid.code | Signal constellation, band and code |
| 19N + 24 | 2 | u16 | 5 mm | obs[N].iono_std | Slant ionospheric correction standard deviation |
| 19N + 26 | 2 | u16 | 5 mm | obs[N].tropo_std | Slant tropospheric correction standard deviation |
| 19N + 28 | 2 | u16 | 5 mm | obs[N].range_std | Orbit/clock/bias correction projected on range standard deviation |
| 19N + 11 | | | | | Total Payload Length |

Table 6.6.55: MSG_OSR 0x0640 message structure



Field 6.6.23: Correction flags. (flags)

| Value | Description |
|-------|-------------------|
| 0 | Do not use signal |
| 1 | Valid signal |

Table 6.6.56: Correction validity values (flags[0])

| Value | Description |
|-------|----------------------------|
| 0 | Partial fixing unavailable |
| 1 | Partial fixing available |

Table 6.6.57: Partial fixing flag values (flags[1])

| Value | Description |
|-------|-------------------------|
| 0 | Full fixing unavailable |
| 1 | Full fixing available |

Table 6.6.58: Full fixing flag values (flags[2])



Field 6.6.24: Signal constellation, band and code (sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 6.6.59: values (sid.code[0:7])

6.7 Settings

Messages for reading, writing, and discovering device settings. Settings with a "string" field have multiple values in this field delimited with a null character (the c style null terminator). For instance, when querying the 'firmware_version' setting in the 'system_info' section, the following array of characters needs to be sent for the string field in MSG_SETTINGS_READ: "system_info\0firmware_version\0", where the delimiting null characters are specified with the escape sequence '\0' and all quotation marks should be omitted.

In the message descriptions below, the generic strings SECTION_SETTING and SETTING are used to refer to the two strings that comprise the identifier of an individual setting. In firmware_version example above, SECTION_SETTING is the 'system_info', and the SETTING portion is 'firmware_version'.

See the "Software Settings Manual" on support.swiftnav.com for detailed documentation about all settings and sections available for each Swift firmware version. Settings manuals are available for each firmware version at the following link: [Piksi Multi Specifications](#). The latest settings document is also available at the following link: [Latest settings document](#). See lastly [settings.py](#), the open source python command line utility for reading, writing, and saving settings in the piksi_tools repository on github as a helpful reference and example.

MSG_SETTINGS_SAVE — 0x00A1 — 161

The save settings message persists the device's current settings configuration to its onboard flash memory file system.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|--------------|--------|-------|------|----------------------|
| | 0 | | | | Total Payload Length |

Table 6.7.1: MSG_SETTINGS_SAVE 0x00A1 message structure

MSG_SETTINGS_WRITE — 0x00A0 — 160

The setting message writes the device configuration for a particular setting via A NULL-terminated and NULL-delimited string with contents "SECTION.SETTING\0SETTING\0VALUE\0" where the '\0' escape sequence denotes the NULL character and where quotation marks are omitted. A device will only process to this message when it is received from sender ID 0x42. An example string that could be sent to a device is "solution\0soln_freq\010\0".

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------------|---|
| 0 | <i>N</i> | string | | setting | A NULL-terminated and NULL-delimited string with contents "SECTION.SETTING\0SETTING\0VALUE\0" |
| | <i>N</i> | | | | Total Payload Length |

Table 6.7.2: MSG_SETTINGS_WRITE 0x00A0 message structure

MSG_SETTINGS_WRITE_RESP — 0x00AF — 175

Return the status of a write request with the new value of the setting. If the requested value is rejected, the current value will be returned. The string field is a NULL-terminated and NULL-delimited string with contents "SECTION.SETTING\0SETTING\0VALUE\0" where the '\0' escape sequence denotes the NULL character and where quotation marks are omitted. An example string that could be sent from device is "solution\0soln_freq\010\0".

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------------|-------|---------|--|
| 0 | 1 | u8 | | status | Write status |
| 1 | <i>N</i> | string | | setting | A NULL-terminated and delimited string with contents "SECTION.SETTING\0SETTING\0VALUE\0" |
| | | <i>N + 1</i> | | | |
| | | | | | Total Payload Length |

Table 6.7.3: MSG_SETTINGS_WRITE_RESP 0x00AF message structure



| Value | Description |
|-------|--|
| 0 | Accepted; value updated |
| 1 | Rejected; value unparsable or out-of-range |
| 2 | Rejected; requested setting does not exist |
| 3 | Rejected; setting name could not be parsed |
| 4 | Rejected; setting is read only |
| 5 | Rejected; modification is temporarily disabled |
| 6 | Rejected; unspecified error |

Table 6.7.4: Write status values (status[0:1])

MSG_SETTINGS_READ_REQ — 0x00A4 — 164

The setting message that reads the device configuration. The string field is a NULL-terminated and NULL-delimited string with contents "SECTION_SETTING\0SETTING\0" where the '\0' escape sequence denotes the NULL character and where quotation marks are omitted. An example string that could be sent to a device is "solution\0soln_freq\0". A device will only respond to this message when it is received from sender ID 0x42. A device should respond with a MSG_SETTINGS_READ_RESP message (msg_id 0x00A5).

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------------------|--|
| 0 | <i>N</i> | string | | <code>setting</code> | A NULL-terminated and NULL-delimited string with contents "SECTION_SETTING\0SETTING\0" |
| | <i>N</i> | | | | Total Payload Length |

Table 6.7.5: MSG_SETTINGS_READ_REQ 0x00A4 message structure

MSG_SETTINGS_READ_RESP — 0x00A5 — 165

The setting message with which the device responds after a MSG_SETTING_READ_REQ is sent to device. The string field is a NULL-terminated and NULL-delimited string with contents "SECTION_SETTING\0SETTING\0VALUE\0" where the '\0' escape sequence denotes the NULL character and where quotation marks are omitted. An example string that could be sent from device is "solution\0soln_freq\010\0".

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|--------------|--------|-------|----------------|---|
| 0 | <i>N</i> | string | | setting | A NULL-terminated and NULL-delimited string with contents "SECTION_SETTING\0SETTING\0VALUE\0" |
| <i>N</i> | | | | | Total Payload Length |

Table 6.7.6: MSG_SETTINGS_READ_RESP 0x00A5 message structure

MSG_SETTINGS_READ_BY_INDEX_REQ — 0x00A2 — 162

The settings message for iterating through the settings values. A device will respond to this message with a "MSG_SETTINGS_READ_BY_INDEX_RESP".

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------|---|
| 0 | 2 | u16 | | index | An index into the device settings, with values ranging from 0 to length(settings) |
| | 2 | | | | Total Payload Length |

Table 6.7.7: MSG_SETTINGS_READ_BY_INDEX_REQ 0x00A2 message structure

MSG_SETTINGS_READ_BY_INDEX_RESP — 0x00A7 — 167

The settings message that reports the value of a setting at an index.

In the string field, it reports NULL-terminated and delimited string with contents "SECTION_SETTING\0SETTING\0VALUE\0FORMAT_TYPE" where the '\0' escape sequence denotes the NULL character and where quotation marks are omitted. The FORMAT_TYPE field is optional and denotes possible string values of the setting as a hint to the user. If included, the format type portion of the string has the format "enum:value1,value2,value3". An example string that could be sent from the device is "simulator\0enabled\0True\0enum:True,False\0"

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|--------------|----------------------|-------|---------|---|
| 0 | 2 | u16 | | index | An index into the device settings, with values ranging from 0 to length(settings) |
| 2 | <i>N</i> | string | | setting | A NULL-terminated and delimited string with contents "SECTION_SETTING\0SETTING\0VALUE\0FORMAT_TYPE" |
| <i>N + 2</i> | | Total Payload Length | | | |

Table 6.7.8: MSG_SETTINGS_READ_BY_INDEX_RESP 0x00A7 message structure

MSG_SETTINGS_READ_BY_INDEX_DONE — 0x00A6 — 166

The settings message for indicating end of the settings values.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|--------------|--------|-------|------|----------------------|
| | 0 | | | | Total Payload Length |

Table 6.7.9: MSG_SETTINGS_READ_BY_INDEX_DONE 0x00A6 message structure

6.8 Solution Meta


Standardized Metadata messages for Fuzed Solution from Swift Navigation devices.

MSG_SOLN_META — 0xFF0F — 65295

This message contains all metadata about the sensors received and/or used in computing the Fuzed Solution. It focuses primarily, but not only, on GNSS metadata.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------------|-------------------------|--|
| 0 | 2 | u16 | 0.01 | pdop | Position Dilution of Precision, as per last available DOPS from Starling GNSS engine |
| 2 | 2 | u16 | 0.01 | hdop | Horizontal Dilution of Precision, as per last available DOPS from Starling GNSS engine |
| 4 | 2 | u16 | 0.01 | vdop | Vertical Dilution of Precision, as per last available DOPS from Starling GNSS engine |
| 6 | 1 | u8 | | n_sats | Number of satellites used in solution, as per last available DOPS from Starling GNSS engine |
| 7 | 2 | u16 | deciseconds | age_corrections | Age of the corrections (0xFFFF indicates invalid), as per last available AGE_CORRECTIONS from Starling GNSS engine |
| 9 | 1 | u8 | | alignment_status | Bits for reason why it cannot align (yet) |
| 10 | 4 | u32 | ms | last_used_gnss_pos_time | Time of last-used GNSS position measurement |
| 14 | 4 | u32 | ms | last_used_gnss_vel_time | Time of last-used GNSS velocity measurement |
| $2N + 18$ | 1 | u8 | | sol_in[N].sensor_type | The type of sensor |
| $2N + 19$ | 1 | u8 | (XX)InputType | sol_in[N].flags | Refer to each InputType description |
| $2N + 18$ | | | | | Total Payload Length |

Table 6.8.1: MSG_SOLN_META 0xFF0F message structure

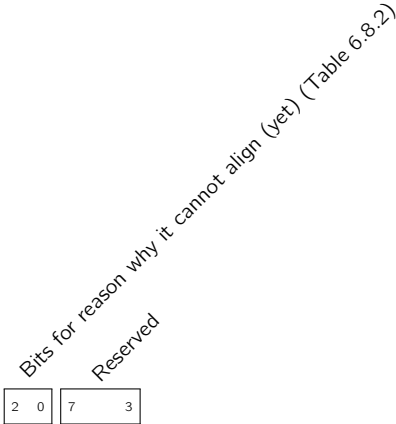


Field 6.8.1: Bits for reason why it cannot align (yet) (`alignment_status`)

| Value | Description |
|-------|--|
| 0 | Unknown reason or already aligned |
| 1 | No seed values nor GNSS measurements |
| 2 | Seed values loaded but not GNSS measurements |
| 3 | Reserved |
| 4 | Reserved |
| 5 | Reserved |
| 6 | Reserved |
| 7 | Reserved |

Table 6.8.2: Bits for reason why it cannot align (yet) values (`alignment_status[0:2]`)

| Value | Description |
|-------|-----------------------|
| 0 | Unknown |
| 1 | Received and used |
| 2 | Received but not used |

Table 6.8.3: Whether this sensor input was actually used or not values (`sol_in[N].sensor_type[3:4]`)

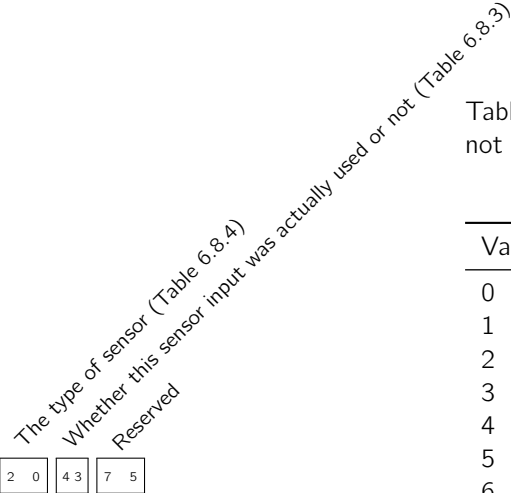

Field 6.8.2: The type of sensor (`sol_in[N].sensor_type`)

| Value | Description |
|-------|--|
| 0 | GNSS Position (see <code>GNSSInputType</code>) |
| 1 | GNSS Velocity Displacement (see <code>GNSSInputType</code>) |
| 2 | GNSS Velocity Doppler (see <code>GNSSInputType</code>) |
| 3 | Odometry Ticks (see <code>OdolInputType</code>) |
| 4 | Odometry Speed (see <code>OdolInputType</code>) |
| 5 | IMU Sensor (see <code>IMUInputType</code>) |
| 6 | Reserved |
| 7 | Reserved |


Table 6.8.4: The type of sensor values (`sol_in[N].sensor_type[0:2]`)

GNSSInputType — 0xFFE7 — 65511

Metadata around the GNSS sensors involved in the fused solution. Accessible through `sol_in[N].flags` in a `MSG_SOLN_META`. Note: Just to build descriptive tables in documentation and not actually used.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------|--|
| 0 | 1 | u8 | | flags | flags that store all relevant info specific to this sensor type. |
| | 1 | | | | Total Payload Length |

Table 6.8.5: GNSSInputType 0xFFE7 message structure



Field 6.8.3: flags that store all relevant info specific to this sensor type. (`flags`)

| Value | Description |
|-------|----------------------------|
| 0 | GNSS Position |
| 1 | GNSS Velocity Doppler |
| 2 | GNSS Velocity Displacement |

Table 6.8.6: Type of GNSS measurement values (`flags[0:1]`)

IMUInputType — 0xFFE8 — 65512

Metadata around the IMU sensors involved in the fused solution. Accessible through `sol.in[N].flags` in a `MSG_SOLN_META`. Note: Just to build descriptive tables in documentation and not actually used.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------|--|
| 0 | 1 | u8 | | flags | flags that store all relevant info specific to this sensor type. |
| | 1 | | | | Total Payload Length |

Table 6.8.7: IMUInputType 0xFFE8 message structure

| Value | Description |
|-------|--|
| 0 | Reference epoch is start of current GPS week |
| 1 | Reference epoch is time of system startup |
| 2 | Reference epoch is unknown |
| 3 | Reference epoch is last PPS |


Table 6.8.8: Time status values (flags[4:5])

| Value | Description |
|-------|------------------------------------|
| 0 | Consumer Grade |
| 1 | Tactical grade |
| 2 | Intermediate Grade |
| 3 | Superior (Marine / Aviation) Grade |

Table 6.8.9: IMU Grade values (flags[2:3])

| Value | Description |
|-------|-------------|
| 0 | 6-axis MEMS |
| 1 | Other type |

Table 6.8.10: IMU architecture values (flags[0:1])



Field 6.8.4: flags that store all relevant info specific to this sensor type. (flags)

OdolInputType — 0xFFE9 — 65513

Metadata around the Odometry sensors involved in the fused solution. Accessible through `sol_in[N].flags` in a `MSG_SOLN_META`. Note: Just to build descriptive tables in documentation and not actually used.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------|--|
| 0 | 1 | u8 | | flags | flags that store all relevant info specific to this sensor type. |
| | 1 | | | | Total Payload Length |

Table 6.8.11: OdolInputType 0xFFE9 message structure

| Value | Description |
|-------|--|
| 0 | Fixed incoming rate |
| 1 | Incoming when triggered by minimum distance or speed |
| 2 | Reserved |
| 3 | Reserved |


Table 6.8.12: Rate values (flags[4:5])

| Value | Description |
|-------|----------------------------------|
| 0 | Low Grade (e.g. quantisized CAN) |
| 1 | Medium Grade |
| 2 | Superior Grade |
| 3 | Reserved |

Table 6.8.13: Odometer grade values (flags[2:3])

| Value | Description |
|-------|--------------------------|
| 0 | Single or averaged ticks |
| 1 | Single or averaged speed |
| 2 | Multi-dimensional ticks |
| 3 | Multi-dimensional speed |

Table 6.8.14: Odometer class values (flags[0:1])



Field 6.8.5: flags that store all relevant info specific to this sensor type. (flags)

6.9 System


Standardized system messages from Swift Navigation devices.

MSG_STARTUP — 0xFF00 — 65280

The system start-up message is sent once on system start-up. It notifies the host or other attached devices that the system has started and is now ready to respond to commands or configuration requests.


| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|--------------|----------------------|
| 0 | 1 | u8 | | cause | Cause of startup |
| 1 | 1 | u8 | | startup_type | Startup type |
| 2 | 2 | u16 | | reserved | Reserved |
| | 4 | | | | Total Payload Length |

Table 6.9.1: MSG_STARTUP 0xFF00 message structure

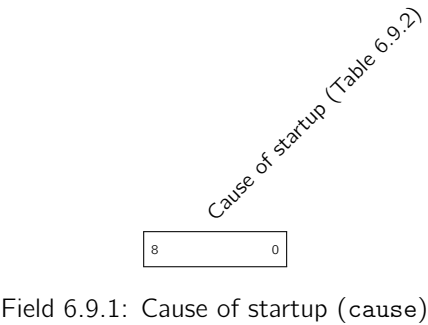

| Value | Description |
|-------|----------------|
| 0 | Power on |
| 1 | Software reset |
| 2 | Watchdog reset |

Table 6.9.2: Cause of startup values (cause[0:8])

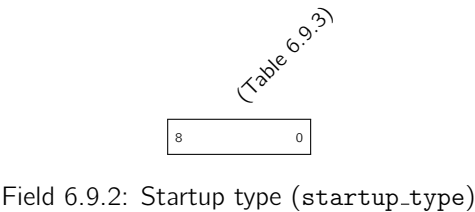

| Value | Description |
|-------|-------------|
| 0 | Cold start |
| 1 | Warm start |
| 2 | Hot start |


Table 6.9.3: values (startup_type[0:8])

MSG_DGNSS_STATUS — 0xFF02 — 65282

This message provides information about the receipt of Differential corrections. It is expected to be sent with each receipt of a complete corrections packet.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|--------------|-------------|-------------------------------------|
| 0 | 1 | u8 | deci-seconds | flags | Status flags |
| 1 | 2 | u16 | | latency | Latency of observation receipt |
| 3 | 1 | u8 | | num_signals | Number of signals from base station |
| 4 | N | string | | source | Corrections source string |
| N + 4 | | | | | Total Payload Length |

Table 6.9.4: MSG_DGNSS_STATUS 0xFF02 message structure



Field 6.9.3: Status flags (flags)

| Value | Description |
|-------|-----------------|
| 0 | Invalid |
| 1 | Code Difference |
| 2 | RTK |

Table 6.9.5: Differential type values (flags[0:3])

MSG_HEARTBEAT — 0xFFFF — 65535

The heartbeat message is sent periodically to inform the host or other attached devices that the system is running. It is used to monitor system malfunctions. It also contains status flags that indicate to the host the status of the system and whether it is operating correctly. Currently, the expected heartbeat interval is 1 sec.

The system error flag is used to indicate that an error has occurred in the system. To determine the source of the error, the remaining error flags should be inspected.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|--------------|--------|-------|-------|----------------------|
| 0 | 4 | u32 | | flags | Status flags |
| | 4 | | | | Total Payload Length |

Table 6.9.6: MSG_HEARTBEAT 0xFFFF message structure

| Value | Description |
|-------|-----------------------|
| 0 | System Healthy |
| 1 | An error has occurred |

Table 6.9.7: System Error Flag values (flags[0])

| Value | Description |
|-------|--------------------------|
| 0 | System Healthy |
| 1 | An IO error has occurred |

Table 6.9.8: IO Error values (flags[1])

| Value | Description |
|-------|---------------------------------------|
| 0 | System Healthy |
| 1 | An error has occurred in the SwiftNAP |


Table 6.9.9: SwiftNAP Error values (flags[2])

| Value | Description |
|-------|-------------------|
| 0 | No short detected |
| 1 | Short detected |

Table 6.9.10: External antenna short values (flags[30])

| Value | Description |
|-------|------------------------------|
| 0 | No external antenna detected |
| 1 | External antenna is present |

Table 6.9.11: External antenna present values (flags[31])

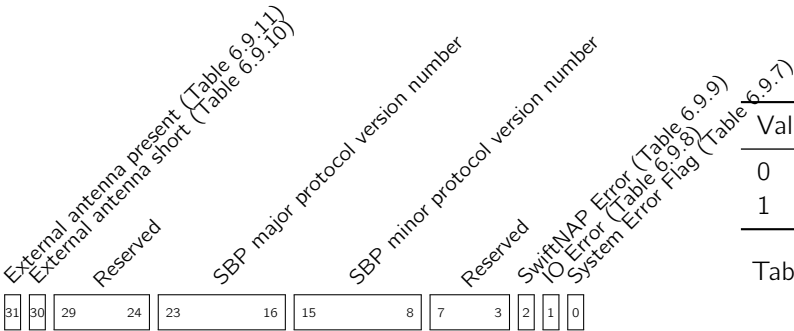


Field 6.9.4: Status flags (flags)

MSG_INS_STATUS — 0xFF03 — 65283

The INS status message describes the state of the operation and initialization of the inertial navigation system.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|--------------|--------|-------|-------|----------------------|
| 0 | 4 | u32 | | flags | Status flags |
| | 4 | | | | Total Payload Length |

Table 6.9.12: MSG_INS_STATUS 0xFF03 message structure

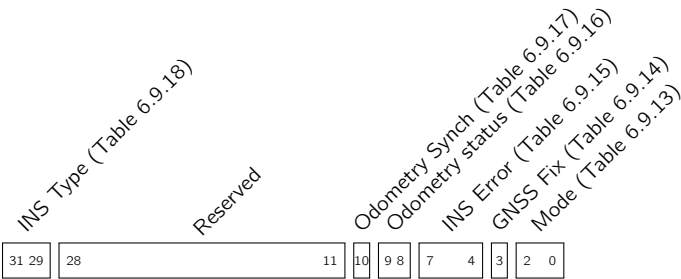

Field 6.9.5: Status flags (flags)

| Value | Description |
|-------|----------------------------------|
| 0 | Awaiting initialization |
| 1 | Dynamically aligning |
| 2 | Ready |
| 3 | GNSS Outage exceeds max duration |
| 4 | FastStart seeding |
| 5 | FastStart validating |

Table 6.9.13: Mode values (flags[0:2])

| Value | Description |
|-------|-----------------------|
| 0 | No GNSS fix available |
| 1 | GNSS fix |

Table 6.9.14: GNSS Fix values (flags[3])

| Value | Description |
|-------|----------------------------|
| 0 | Reserved |
| 1 | IMU Data Error |
| 2 | INS License Error |
| 3 | IMU Calibration Data Error |

Table 6.9.15: INS Error values (flags[4:7])

| Value | Description |
|-------|--|
| 0 | No Odometry |
| 1 | Odometry received within last second |
| 2 | Odometry not received within last second |

Table 6.9.16: Odometry status values (flags[8:9])

| Value | Description |
|-------|----------------------------------|
| 0 | Odometry timestamp nominal |
| 1 | Odometry timestamp out of bounds |

Table 6.9.17: Odometry Synch values (flags[10])

| Value | Description |
|-------|----------------------------|
| 0 | Smoothpose Loosely Coupled |
| 1 | Other Loosely Coupled |
| 2 | Reserved |
| 3 | Reserved |
| 4 | Reserved |
| 5 | Reserved |
| 6 | Reserved |
| 7 | Reserved |

Table 6.9.18: INS Type values (flags[29:31])

MSG_GNSS_TIME_OFFSET — 0xFF07 — 65287

The GNSS time offset message contains the information that is needed to translate messages tagged with a local timestamp (e.g. IMU or wheeltick messages) to GNSS time for the sender producing this message.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|--------------|--------------|---|
| 0 | 2 | s16 | weeks | weeks | Weeks portion of the time offset |
| 2 | 4 | s32 | ms | milliseconds | Milliseconds portion of the time offset |
| 6 | 2 | s16 | microseconds | microseconds | Microseconds portion of the time offset |
| 8 | 1 | u8 | | flags | Status flags (reserved) |
| | 9 | | | | Total Payload Length |

Table 6.9.19: MSG_GNSS_TIME_OFFSET 0xFF07 message structure

MSG_GROUP_META — 0xFF0A — 65290

This leading message lists the time metadata of the Solution Group. It also lists the atomic contents (i.e. types of messages included) of the Solution Group.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------------|--|
| 0 | 2 | u16 | weeks | wn | GPS Week Number or zero if Reference epoch is not GPS |
| 2 | 4 | u32 | ms | tom | Time of Measurement in Milliseconds since reference epoch |
| 6 | 4 | s32 | ns | ns_residual | Nanosecond residual of millisecond-rounded TOM (ranges from -500000 to 500000) |
| 10 | 1 | u8 | | flags | Status flags (reserved) |
| 11 | N | u16[N] | | group_msgs | An inorder list of message types included in the Solution Group |
| 2N + 11 | | | | | Total Payload Length |


Table 6.9.20: MSG_GROUP_META 0xFF0A message structure

| Value | Description |
|-------|--|
| 0 | Reference epoch is start of current GPS week |
| 1 | Reference epoch is Sensor Time Init |
| 2 | Reference epoch is unknown |
| 3 | Reference epoch is last PPS |

Table 6.9.21: Time source values (flags[0:1])

| Value | Description |
|-------|------------------|
| 0 | None (invalid) |
| 1 | GNSS only |
| 2 | GNSS+INS (Fuzed) |
| 3 | Reserved |

Table 6.9.22: Solution Group type values (flags[2:3])

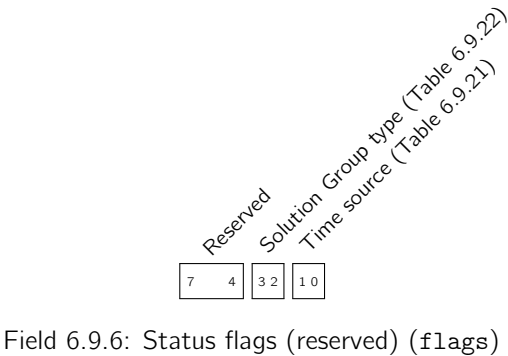

7 Draft Message Definitions

7.1 Acquisition

Satellite acquisition messages from the device.


MSG ACQ RESULT — 0x002F — 47

This message describes the results from an attempted GPS signal acquisition search for a satellite PRN over a code phase/carrier frequency range. It contains the parameters of the point in the acquisition search space with the best carrier-to-noise (CN/0) ratio.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|--|
| 0 | 4 | float | dB Hz | cn0 | CN/0 of best point |
| 4 | 4 | float | chips | cp | Code phase of best point |
| 8 | 4 | float | hz | cf | Carrier frequency of best point |
| 12 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 13 | 1 | u8 | | sid.code | Signal constellation, band and code |
| | 14 | | | | Total Payload Length |

Table 7.1.1: MSG_ACQ_RESULT 0x002F message structure

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |



Field 7.1.1: Signal constellation, band and code (sid.code)

Table 7.1.2: values (sid.code[0:7])

MSG ACQ SV PROFILE — 0x002E — 46

The message describes all SV profiles during acquisition time. The message is used to debug and measure the performance.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|-----------------|--------|----------|------------------------------|--|
| 33N + 0 | 1 | u8 | | acq_sv_profile[N].job.type | SV search job type (deep, fallback, etc) |
| 33N + 1 | 1 | u8 | | acq_sv_profile[N].status | Acquisition status 1 is Success, 0 is Failure |
| 33N + 2 | 2 | u16 | dB-Hz*10 | acq_sv_profile[N].cn0 | CN0 value. Only valid if status is '1' |
| 33N + 4 | 1 | u8 | ms | acq_sv_profile[N].int.time | Acquisition integration time |
| 33N + 5 | 1 | u8 | | acq_sv_profile[N].sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 33N + 6 | 1 | u8 | | acq_sv_profile[N].sid.code | Signal constellation, band and code |
| 33N + 7 | 2 | u16 | Hz | acq_sv_profile[N].bin.width | Acq frequency bin width |
| 33N + 9 | 4 | u32 | ms | acq_sv_profile[N].timestamp | Timestamp of the job complete event |
| 33N + 13 | 4 | u32 | us | acq_sv_profile[N].time.spent | Time spent to search for sid.code |
| 33N + 17 | 4 | s32 | Hz | acq_sv_profile[N].cf.min | Doppler range lowest frequency |
| 33N + 21 | 4 | s32 | Hz | acq_sv_profile[N].cf.max | Doppler range highest frequency |
| 33N + 25 | 4 | s32 | Hz | acq_sv_profile[N].cf | Doppler value of detected peak. Only valid if status is '1' |
| 33N + 29 | 4 | u32 | chips*10 | acq_sv_profile[N].cp | Codephase of detected peak. Only valid if status is '1' |
| 33N | | | | | Total Payload Length |

Table 7.1.3: MSG_ACQ_SV_PROFILE 0x002E message structure

(Table 7.1.4)

7

0

Field 7.1.2: Signal constellation, band and code (acq_sv_profile[N].sid.code)

Table 7.1.4: values (acq_sv_profile[N].sid.code[0:7])

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

7.2 File IO

Messages for using device's onboard flash filesystem functionality. This allows data to be stored persistently in the device's program flash with wear-levelling using a simple filesystem interface. The file system interface (CFS) defines an abstract API for reading directories and for reading and writing files.

Note that some of these messages share the same message type ID for both the host request and the device response.

MSG_FILEIO_READ_REQ — 0x00A8 — 168

The file read message reads a certain length (up to 255 bytes) from a given offset into a file, and returns the data in a MSG_FILEIO_READ_RESP message where the message length field indicates how many bytes were successfully read. The sequence number in the request will be returned in the response. If the message is invalid, a followup MSG_PRINT message will print "Invalid fileio read message". A device will only respond to this message when it is received from sender ID 0x42.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------------------------|-------------------------------|
| 0 | 4 | u32 | | <code>sequence</code> | Read sequence number |
| 4 | 4 | u32 | bytes | <code>offset</code> | File offset |
| 8 | 1 | u8 | bytes | <code>chunk_size</code> | Chunk size to read |
| 9 | <i>N</i> | string | | <code>filename</code> | Name of the file to read from |
| | <i>N + 9</i> | | | | Total Payload Length |

Table 7.2.1: MSG_FILEIO_READ_REQ 0x00A8 message structure

MSG_FILEIO_READ_RESP — 0x00A3 — 163

The file read message reads a certain length (up to 255 bytes) from a given offset into a file, and returns the data in a message where the message length field indicates how many bytes were successfully read. The sequence number in the response is preserved from the request.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|-----------------------|
| 0 | 4 | u32 | | sequence | Read sequence number |
| 4 | N | u8[N] | | contents | Contents of read file |
| | $N + 4$ | | | | Total Payload Length |

Table 7.2.2: MSG_FILEIO_READ_RESP 0x00A3 message structure

MSG_FILEIO_READ_DIR_REQ — 0x00A9 — 169

The read directory message lists the files in a directory on the device's onboard flash file system. The offset parameter can be used to skip the first n elements of the file list. Returns a MSG_FILEIO_READ_DIR_RESP message containing the directory listings as a NULL delimited list. The listing is chunked over multiple SBP packets. The sequence number in the request will be returned in the response. If message is invalid, a followup MSG_PRINT message will print "Invalid fileio read message". A device will only respond to this message when it is received from sender ID 0x42.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-----------------|--|
| 0 | 4 | u32 | | sequence | Read sequence number |
| 4 | 4 | u32 | | offset | The offset to skip the first n elements of the file list |
| 8 | N | string | | dirname | Name of the directory to list |
| | $N + 8$ | | | | Total Payload Length |

Table 7.2.3: MSG_FILEIO_READ_DIR_REQ 0x00A9 message structure

MSG_FILEIO_READ_DIR_RESP — 0x00AA — 170

The read directory message lists the files in a directory on the device's onboard flash file system. Message contains the directory listings as a NULL delimited list. The listing is chunked over multiple SBP packets and the end of the list is identified by an entry containing just the character 0xFF. The sequence number in the response is preserved from the request.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-----------------|----------------------------|
| 0 | 4 | u32 | | sequence | Read sequence number |
| 4 | N | u8[N] | | contents | Contents of read directory |
| | $N + 4$ | | | | Total Payload Length |

Table 7.2.4: MSG_FILEIO_READ_DIR_RESP 0x00AA message structure

MSG_FILEIO_REMOVE — 0x00AC — 172

The file remove message deletes a file from the file system. If the message is invalid, a followup MSG_PRINT message will print "Invalid fileio remove message". A device will only process this message when it is received from sender ID 0x42.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-----------------------|----------------------------|
| 0 | <i>N</i> | string | | <code>filename</code> | Name of the file to delete |
| | <i>N</i> | | | | Total Payload Length |

Table 7.2.5: MSG_FILEIO_REMOVE 0x00AC message structure

MSG_FILEIO_WRITE_REQ — 0x00AD — 173

The file write message writes a certain length (up to 255 bytes) of data to a file at a given offset. Returns a copy of the original MSG_FILEIO_WRITE_RESP message to check integrity of the write. The sequence number in the request will be returned in the response. If message is invalid, a followup MSG_PRINT message will print "Invalid fileio write message". A device will only process this message when it is received from sender ID 0x42.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-----------------------|---|
| 0 | 4 | u32 | | <code>sequence</code> | Write sequence number |
| 4 | 4 | u32 | bytes | <code>offset</code> | Offset into the file at which to start writing in bytes |
| 8 | N | string | | <code>filename</code> | Name of the file to write to |
| 9 | N | u8[N] | | <code>data</code> | Variable-length array of data to write |
| | $N + 9$ | | | | Total Payload Length |

Table 7.2.6: MSG_FILEIO_WRITE_REQ 0x00AD message structure

MSG_FILEIO_WRITE_RESP — 0x00AB — 171

The file write message writes a certain length (up to 255 bytes) of data to a file at a given offset. The message is a copy of the original MSG_FILEIO_WRITE_REQ message to check integrity of the write. The sequence number in the response is preserved from the request.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-----------------------|-----------------------|
| 0 | 4 | u32 | | <code>sequence</code> | Write sequence number |
| | 4 | | | | Total Payload Length |

Table 7.2.7: MSG_FILEIO_WRITE_RESP 0x00AB message structure

MSG FILEIO CONFIG REQ — 0x1001 — 4097

Requests advice on the optimal configuration for a FileIO transfer. Newer version of FileIO can support greater throughput by supporting a large window of FileIO data that can be in-flight during read or write operations.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|------------------------|
| 0 | 4 | u32 | | sequence | Advice sequence number |
| | 4 | | | | Total Payload Length |

Table 7.2.8: MSG_FILEIO_CONFIG_REQ 0x1001 message structure

MSG_FILEIO_CONFIG_RESP — 0x1002 — 4098

The advice on the optimal configuration for a FileIO transfer. Newer version of FileIO can support greater throughput by supporting a large window of FileIO data that can be in-flight during read or write operations.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-----------------------------|--|
| 0 | 4 | u32 | | <code>sequence</code> | Advice sequence number |
| 4 | 4 | u32 | | <code>window_size</code> | The number of SBP packets in the data in-flight window |
| 8 | 4 | u32 | | <code>batch_size</code> | The number of SBP packets sent in one PDU |
| 12 | 4 | u32 | | <code>fileio_version</code> | The version of FileIO that is supported |
| | 16 | | | | Total Payload Length |

Table 7.2.9: MSG_FILEIO_CONFIG_RESP 0x1002 message structure

7.3 Linux

Linux state monitoring.

MSG LINUX CPU STATE — 0x7F00 — 32512

This message indicates the process state of the top 10 heaviest consumers of CPU on the system.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|---------|---|
| 0 | 1 | u8 | | index | sequence of this status message, values from 0-9 |
| 1 | 2 | u16 | | pid | the PID of the process |
| 3 | 1 | u8 | | pcpu | percent of cpu used, expressed as a fraction of 256 |
| 4 | 15 | string | | tname | fixed length string representing the thread name |
| 19 | N | string | | cmdline | the command line (as much as it fits in the remaining packet) |
| $N + 19$ | | | | | Total Payload Length |

Table 7.3.1: MSG_LINUX_CPU_STATE 0x7F00 message structure

MSG LINUX MEM STATE — 0x7F01 — 32513

This message indicates the process state of the top 10 heaviest consumers of memory on the system.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|---------|---|
| 0 | 1 | u8 | | index | sequence of this status message, values from 0-9 |
| 1 | 2 | u16 | | pid | the PID of the process |
| 3 | 1 | u8 | | pmem | percent of memory used, expressed as a fraction of 256 |
| 4 | 15 | string | | tname | fixed length string representing the thread name |
| 19 | N | string | | cmdline | the command line (as much as it fits in the remaining packet) |
| $N + 19$ | | | | | Total Payload Length |

Table 7.3.2: MSG_LINUX_MEM_STATE 0x7F01 message structure

MSG LINUX SYS STATE — 0x7F02 — 32514

This presents a summary of CPU and memory utilization.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------------|--|
| 0 | 2 | u16 | | mem_total | total system memory |
| 2 | 1 | u8 | | pcpu | percent of total cpu currently utilized |
| 3 | 1 | u8 | | pmem | percent of total memory currently utilized |
| 4 | 2 | u16 | | procs_starting | number of processes that started during collection phase |
| 6 | 2 | u16 | | procs_stopping | number of processes that stopped during collection phase |
| 8 | 2 | u16 | | pid_count | the count of processes on the system |
| | 10 | | | | Total Payload Length |

Table 7.3.3: MSG_LINUX_SYS_STATE 0x7F02 message structure

MSG LINUX PROCESS SOCKET COUNTS — 0x7F03 — 32515

Top 10 list of processes with high socket counts.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------------------------|---|
| 0 | 1 | u8 | | <code>index</code> | sequence of this status message, values from 0-9 |
| 1 | 2 | u16 | | <code>pid</code> | the PID of the process in question |
| 3 | 2 | u16 | | <code>socket_count</code> | the number of sockets the process is using |
| 5 | 2 | u16 | | <code>socket_types</code> | A bitfield indicating the socket types used: 0x1 (tcp), 0x2 (udp), 0x4 (unix stream), 0x8 (unix dgram), 0x10 (netlink), and 0x8000 (unknown) |
| 7 | 2 | u16 | | <code>socket_states</code> | A bitfield indicating the socket states: 0x1 (established), 0x2 (syn-sent), 0x4 (syn-recv), 0x8 (fin-wait-1), 0x10 (fin-wait-2), 0x20 (time-wait), 0x40 (closed), 0x80 (close-wait), 0x100 (last-ack), 0x200 (listen), 0x400 (closing), 0x800 (unconnected), and 0x8000 (unknown) |
| 9 | <i>N</i> | string | | <code>cmdline</code> | the command line of the process in question |
| <i>N + 9</i> | | | | | Total Payload Length |

Table 7.3.4: MSG_LINUX_PROCESS_SOCKET_COUNTS 0x7F03 message structure

MSG LINUX PROCESS SOCKET QUEUES — 0x7F04 — 32516

Top 10 list of sockets with deep queues.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|--------------------|---|
| 0 | 1 | u8 | | index | sequence of this status message, values from 0-9 |
| 1 | 2 | u16 | | pid | the PID of the process in question |
| 3 | 2 | u16 | | recv_queued | the total amount of receive data queued for this process |
| 5 | 2 | u16 | | send_queued | the total amount of send data queued for this process |
| 7 | 2 | u16 | | socket_types | A bitfield indicating the socket types used: 0x1 (tcp), 0x2 (udp), 0x4 (unix stream), 0x8 (unix dgram), 0x10 (netlink), and 0x8000 (unknown) |
| 9 | 2 | u16 | | socket_states | A bitfield indicating the socket states: 0x1 (established), 0x2 (syn-sent), 0x4 (syn-recv), 0x8 (fin-wait-1), 0x10 (fin-wait-2), 0x20 (time-wait), 0x40 (closed), 0x80 (close-wait), 0x100 (last-ack), 0x200 (listen), 0x400 (closing), 0x800 (unconnected), and 0x8000 (unknown) |
| 11 | 64 | string | | address_of_largest | Address of the largest queue, remote or local depending on the directionality of the connection. |
| 75 | <i>N</i> | string | | cmdline | the command line of the process in question |
| <i>N + 75</i> | | | | | Total Payload Length |

Table 7.3.5: MSG_LINUX_PROCESS_SOCKET_QUEUES 0x7F04 message structure

MSG LINUX SOCKET USAGE — 0x7F05 — 32517

Summaries the socket usage across the system.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|---------|-------|---------------------|---|
| 0 | 4 | u32 | | avg_queue_depth | average socket queue depths across all sockets on the system |
| 4 | 4 | u32 | | max_queue_depth | the max queue depth seen within the reporting period |
| 8 | 32 | u16[16] | | socket_state_counts | A count for each socket type reported in the 'socket_types_reported' field, the first entry corresponds to the first enabled bit in 'types_reported'. |
| 40 | 32 | u16[16] | | socket_type_counts | A count for each socket type reported in the 'socket_types_reported' field, the first entry corresponds to the first enabled bit in 'types_reported'. |
| 72 | | | | | Total Payload Length |

Table 7.3.6: MSG_LINUX_SOCKET_USAGE 0x7F05 message structure

MSG LINUX PROCESS FD COUNT — 0x7F06 — 32518

Top 10 list of processes with a large number of open file descriptors.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|---|
| 0 | 1 | u8 | | index | sequence of this status message, values from 0-9 |
| 1 | 2 | u16 | | pid | the PID of the process in question |
| 3 | 2 | u16 | | fd_count | a count of the number of file descriptors opened by the process |
| 5 | N | string | | cmdline | the command line of the process in question |
| | $N + 5$ | | | | Total Payload Length |

Table 7.3.7: MSG_LINUX_PROCESS_FD_COUNT 0x7F06 message structure

MSG LINUX PROCESS FD SUMMARY — 0x7F07 — 32519

Summary of open file descriptors on the system.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|--------------|---|
| 0 | 4 | u32 | | sys_fd_count | count of total FDs open on the system |
| 4 | N | string | | most_opened | A null delimited list of strings which alternates between a string representation of the process count and the file name whose count it being reported. That is, in C string syntax "32\0/var/log/syslog\012\0/tmp/foo\0" with the end of the list being 2 NULL terminators in a row. |
| | $N + 4$ | | | | Total Payload Length |

Table 7.3.8: MSG_LINUX_PROCESS_FD_SUMMARY 0x7F07 message structure

7.4 Orientation


Orientation Messages

MSG BASELINE HEADING — 0x020F — 527

This message reports the baseline heading pointing from the base station to the rover relative to True North. The full GPS time is given by the preceding MSG_GPS_TIME with the matching time-of-week (tow). It is intended that time-matched RTK mode is used when the base station is moving.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|---------|---------------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | u32 | mdeg | heading | Heading |
| 8 | 1 | u8 | | n_sats | Number of satellites used in solution |
| 9 | 1 | u8 | | flags | Status flags |
| 10 | | | | | Total Payload Length |

Table 7.4.1: MSG_BASELINE_HEADING 0x020F message structure



Field 7.4.1: Status flags (flags)

| Value | Description |
|-------|---------------------------|
| 0 | Invalid |
| 1 | Reserved |
| 2 | Differential GNSS (DGNSS) |
| 3 | Float RTK |
| 4 | Fixed RTK |


Table 7.4.2: Fix mode values (flags[0:2])

MSG ORIENT QUAT — 0x0220 — 544

This message reports the quaternion vector describing the vehicle body frame's orientation with respect to a local-level NED frame. The components of the vector should sum to a unit vector assuming that the LSB of each component as a value of 2^{-31} . This message will only be available in future INS versions of Swift Products and is not produced by Piksi Multi or Duro.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-----------|------------|-----------------------------------|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | 2^{-31} | w | Real component |
| 8 | 4 | s32 | 2^{-31} | x | 1st imaginary component |
| 12 | 4 | s32 | 2^{-31} | y | 2nd imaginary component |
| 16 | 4 | s32 | 2^{-31} | z | 3rd imaginary component |
| 20 | 4 | float | N/A | w_accuracy | Estimated standard deviation of w |
| 24 | 4 | float | N/A | x_accuracy | Estimated standard deviation of x |
| 28 | 4 | float | N/A | y_accuracy | Estimated standard deviation of y |
| 32 | 4 | float | N/A | z_accuracy | Estimated standard deviation of z |
| 36 | 1 | u8 | | flags | Status flags |
| 37 | | | | | Total Payload Length |

Table 7.4.3: MSG_ORIENT_QUAT 0x0220 message structure

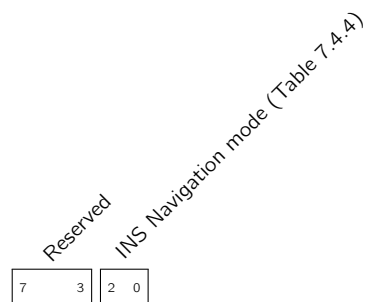

Field 7.4.2: Status flags (flags)

| Value | Description |
|-------|-------------|
| 0 | Invalid |
| 1 | Valid |


Table 7.4.4: INS Navigation mode values (flags[0:2])

MSG ORIENT EULER — 0x0221 — 545

This message reports the yaw, pitch, and roll angles of the vehicle body frame. The rotations should be applied intrinsically in the order yaw, pitch, and roll in order to rotate from a frame aligned with the local-level NED frame to the vehicle body frame. This message will only be available in future INS versions of Swift Products and is not produced by Piksi Multi or Duro.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|--------------|----------------|--|
| 0 | 4 | u32 | ms | tow | GPS Time of Week |
| 4 | 4 | s32 | microdegrees | roll | rotation about the forward axis of the vehicle |
| 8 | 4 | s32 | microdegrees | pitch | rotation about the rightward axis of the vehicle |
| 12 | 4 | s32 | microdegrees | yaw | rotation about the downward axis of the vehicle |
| 16 | 4 | float | degrees | roll_accuracy | Estimated standard deviation of roll |
| 20 | 4 | float | degrees | pitch_accuracy | Estimated standard deviation of pitch |
| 24 | 4 | float | degrees | yaw_accuracy | Estimated standard deviation of yaw |
| 28 | 1 | u8 | | flags | Status flags |
| 29 | | | | | Total Payload Length |

Table 7.4.5: MSG_ORIENT_EULER 0x0221 message structure

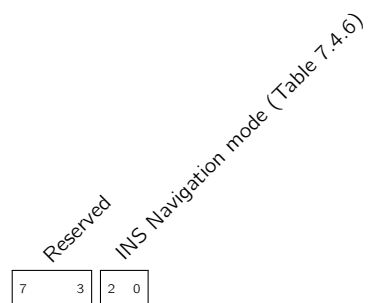

Field 7.4.3: Status flags (flags)

| Value | Description |
|-------|-------------|
| 0 | Invalid |
| 1 | Valid |


Table 7.4.6: INS Navigation mode values (flags[0:2])

MSG ANGULAR RATE — 0x0222 — 546

This message reports the orientation rates in the vehicle body frame. The values represent the measurements a strapped down gyroscope would make and are not equivalent to the time derivative of the Euler angles. The orientation and origin of the user frame is specified via device settings. By convention, the vehicle x-axis is expected to be aligned with the forward direction, while the vehicle y-axis is expected to be aligned with the right direction, and the vehicle z-axis should be aligned with the down direction. This message will only be available in future INS versions of Swift Products and is not produced by Piksi Multi or Duro.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------------|--------------------|---------------------------|
| 0 | 4 | u32 | ms | <code>tow</code> | GPS Time of Week |
| 4 | 4 | s32 | microdegrees/s | <code>x</code> | angular rate about x axis |
| 8 | 4 | s32 | microdegrees/s | <code>y</code> | angular rate about y axis |
| 12 | 4 | s32 | microdegrees/s | <code>z</code> | angular rate about z axis |
| 16 | 1 | u8 | | <code>flags</code> | Status flags |
| | 17 | | | | Total Payload Length |

Table 7.4.7: MSG_ANGULAR_RATE 0x0222 message structure

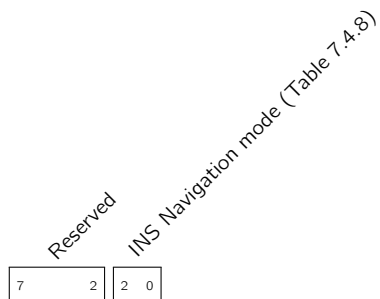Field 7.4.4: Status flags (`flags`)

| Value | Description |
|-------|-------------|
| 0 | Invalid |
| 1 | Valid |

Table 7.4.8: INS Navigation mode values (`flags[0:2]`)

7.5 Piksi

System health, configuration, and diagnostic messages specific to the Piksi L1 receiver, including a variety of legacy messages that may no longer be used.

MSG ALMANAC — 0x0069 — 105

This is a legacy message for sending and loading a satellite almanac onto the Piksi's flash memory from the host.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------|----------------------|
| | 0 | | | | Total Payload Length |

Table 7.5.1: MSG_ALMANAC 0x0069 message structure

MSG SET TIME — 0x0068 — 104

This message sets up timing functionality using a coarse GPS time estimate sent by the host.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------|----------------------|
| | 0 | | | | Total Payload Length |


Table 7.5.2: MSG_SET_TIME 0x0068 message structure

MSG RESET — 0x00B6 — 182

This message from the host resets the Piksi back into the bootloader.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-------|----------------------|
| 0 | 4 | u32 | | flags | Reset flags |
| | 4 | | | | Total Payload Length |

Table 7.5.3: MSG.RESET 0x00B6 message structure

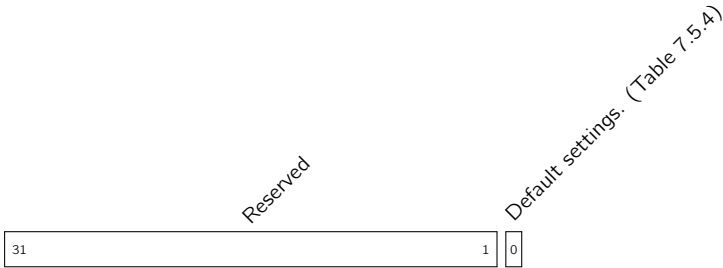

Field 7.5.1: Reset flags (f1ags)

| Value | Description |
|-------|-----------------------------|
| 0 | Preserve existing settings. |
| 1 | Resore default settings. |

Table 7.5.4: Default settings. values (f1ags[0])

MSG RESET DEP — 0x00B2 — 178

This message from the host resets the Piksi back into the bootloader.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------|----------------------|
| | 0 | | | | Total Payload Length |

Table 7.5.5: MSG_RESET_DEP 0x00B2 message structure

MSG CW RESULTS — 0x00C0 — 192

This is an unused legacy message for result reporting from the CW interference channel on the SwiftNAP. This message will be removed in a future release.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------|----------------------|
| | 0 | | | | Total Payload Length |

Table 7.5.6: MSG_CW_RESULTS 0x00C0 message structure

MSG CW START — 0x00C1 — 193

This is an unused legacy message from the host for starting the CW interference channel on the SwiftNAP. This message will be removed in a future release.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------|----------------------|
| | 0 | | | | Total Payload Length |


Table 7.5.7: MSG_CW_START 0x00C1 message structure

MSG RESET FILTERS — 0x0022 — 34

This message resets either the DGNSS Kalman filters or Integer Ambiguity Resolution (IAR) process.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|---------------------|----------------------|
| 0 | 1 | u8 | | <code>filter</code> | Filter flags |
| | 1 | | | | Total Payload Length |

Table 7.5.8: MSG_RESET_FILTERS 0x0022 message structure

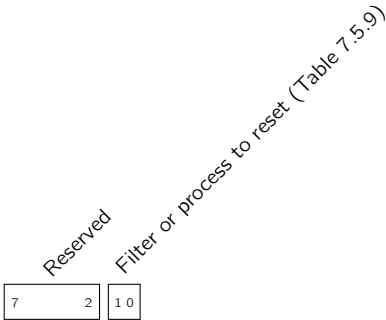

Field 7.5.2: Filter flags (`filter`)

| Value | Description |
|-------|-----------------|
| 0 | DGNSS filter |
| 1 | IAR process |
| 2 | Inertial filter |

Table 7.5.9: Filter or process to reset values (`filter[0:1]`)

MSG INIT BASE DEP — 0x0023 — 35

Deprecated

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------|----------------------|
| | 0 | | | | Total Payload Length |

Table 7.5.10: MSG_INIT_BASE_DEP 0x0023 message structure

MSG_THREAD_STATE — 0x0017 — 23

The thread usage message from the device reports real-time operating system (RTOS) thread usage statistics for the named thread. The reported percentage values must be normalized.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------------|--|
| 0 | 20 | string | | name | Thread name (NULL terminated) |
| 20 | 2 | u16 | | cpu | Percentage cpu use for this thread. Values range from 0 - 1000 and needs to be renormalized to 100 |
| 22 | 4 | u32 | bytes | stack_free | Free stack space for this thread |
| | 26 | | | | Total Payload Length |

Table 7.5.11: MSG_THREAD_STATE 0x0017 message structure

MSG_UART_STATE — 0x001D — 29

The UART message reports data latency and throughput of the UART channels providing SBP I/O. On the default Piksi configuration, UARTs A and B are used for telemetry radios, but can also be host access ports for embedded hosts, or other interfaces in future. The reported percentage values must be normalized. Observations latency and period can be used to assess the health of the differential corrections link. Latency provides the timeliness of received base observations while the period indicates their likelihood of transmission.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|-----------------|--------|-------|---------------------------|--|
| 0 | 4 | float | kB/s | uart_a.tx_throughput | UART transmit throughput |
| 4 | 4 | float | kB/s | uart_a.rx_throughput | UART receive throughput |
| 8 | 2 | u16 | | uart_a.crc_error_count | UART CRC error count |
| 10 | 2 | u16 | | uart_a.io_error_count | UART IO error count |
| 12 | 1 | u8 | | uart_a.tx_buffer_level | UART transmit buffer percentage utilization (ranges from 0 to 255) |
| 13 | 1 | u8 | | uart_a.rx_buffer_level | UART receive buffer percentage utilization (ranges from 0 to 255) |
| 14 | 4 | float | kB/s | uart_b.tx_throughput | UART transmit throughput |
| 18 | 4 | float | kB/s | uart_b.rx_throughput | UART receive throughput |
| 22 | 2 | u16 | | uart_b.crc_error_count | UART CRC error count |
| 24 | 2 | u16 | | uart_b.io_error_count | UART IO error count |
| 26 | 1 | u8 | | uart_b.tx_buffer_level | UART transmit buffer percentage utilization (ranges from 0 to 255) |
| 27 | 1 | u8 | | uart_b.rx_buffer_level | UART receive buffer percentage utilization (ranges from 0 to 255) |
| 28 | 4 | float | kB/s | uart_ftdi.tx_throughput | UART transmit throughput |
| 32 | 4 | float | kB/s | uart_ftdi.rx_throughput | UART receive throughput |
| 36 | 2 | u16 | | uart_ftdi.crc_error_count | UART CRC error count |
| 38 | 2 | u16 | | uart_ftdi.io_error_count | UART IO error count |
| 40 | 1 | u8 | | uart_ftdi.tx_buffer_level | UART transmit buffer percentage utilization (ranges from 0 to 255) |
| 41 | 1 | u8 | | uart_ftdi.rx_buffer_level | UART receive buffer percentage utilization (ranges from 0 to 255) |
| 42 | 4 | s32 | ms | latency.avg | Average latency |
| 46 | 4 | s32 | ms | latency.lmin | Minimum latency |
| 50 | 4 | s32 | ms | latency.lmax | Maximum latency |
| 54 | 4 | s32 | ms | latency.current | Smoothed estimate of the current latency |
| 58 | 4 | s32 | ms | obs_period.avg | Average period |
| 62 | 4 | s32 | ms | obs_period.pmin | Minimum period |
| 66 | 4 | s32 | ms | obs_period.pmax | Maximum period |
| 70 | 4 | s32 | ms | obs_period.current | Smoothed estimate of the current period |
| 74 | | | | | Total Payload Length |

Table 7.5.12: MSG_UART_STATE 0x001D message structure

MSG_UART_STATE_DEPA — 0x0018 — 24

Deprecated

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|-----------------|--------|-------|---------------------------|--|
| 0 | 4 | float | kB/s | uart_a.tx_throughput | UART transmit throughput |
| 4 | 4 | float | kB/s | uart_a.rx_throughput | UART receive throughput |
| 8 | 2 | u16 | | uart_a.crc_error_count | UART CRC error count |
| 10 | 2 | u16 | | uart_a.io_error_count | UART IO error count |
| 12 | 1 | u8 | | uart_a.tx_buffer_level | UART transmit buffer percentage utilization (ranges from 0 to 255) |
| 13 | 1 | u8 | | uart_a.rx_buffer_level | UART receive buffer percentage utilization (ranges from 0 to 255) |
| 14 | 4 | float | kB/s | uart_b.tx_throughput | UART transmit throughput |
| 18 | 4 | float | kB/s | uart_b.rx_throughput | UART receive throughput |
| 22 | 2 | u16 | | uart_b.crc_error_count | UART CRC error count |
| 24 | 2 | u16 | | uart_b.io_error_count | UART IO error count |
| 26 | 1 | u8 | | uart_b.tx_buffer_level | UART transmit buffer percentage utilization (ranges from 0 to 255) |
| 27 | 1 | u8 | | uart_b.rx_buffer_level | UART receive buffer percentage utilization (ranges from 0 to 255) |
| 28 | 4 | float | kB/s | uart_ftdi.tx_throughput | UART transmit throughput |
| 32 | 4 | float | kB/s | uart_ftdi.rx_throughput | UART receive throughput |
| 36 | 2 | u16 | | uart_ftdi.crc_error_count | UART CRC error count |
| 38 | 2 | u16 | | uart_ftdi.io_error_count | UART IO error count |
| 40 | 1 | u8 | | uart_ftdi.tx_buffer_level | UART transmit buffer percentage utilization (ranges from 0 to 255) |
| 41 | 1 | u8 | | uart_ftdi.rx_buffer_level | UART receive buffer percentage utilization (ranges from 0 to 255) |
| 42 | 4 | s32 | ms | latency.avg | Average latency |
| 46 | 4 | s32 | ms | latency.lmin | Minimum latency |
| 50 | 4 | s32 | ms | latency.lmax | Maximum latency |
| 54 | 4 | s32 | ms | latency.current | Smoothed estimate of the current latency |
| 58 | | | | | Total Payload Length |

Table 7.5.13: MSG_UART_STATE_DEPA 0x0018 message structure

MSG IAR STATE — 0x0019 — 25

This message reports the state of the Integer Ambiguity Resolution (IAR) process, which resolves unknown integer ambiguities from double-differenced carrier-phase measurements from satellite observations.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|--|
| 0 | 4 | u32 | | num_hyps | Number of integer ambiguity hypotheses remaining |
| | 4 | | | | Total Payload Length |


Table 7.5.14: MSG_IAR_STATE 0x0019 message structure

MSG MASK SATELLITE — 0x002B — 43

This message allows setting a mask to prevent a particular satellite from being used in various Piksi subsystems.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|--|
| 0 | 1 | u8 | | mask | Mask of systems that should ignore this satellite. |
| 1 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 2 | 1 | u8 | | sid.code | Signal constellation, band and code |
| | 3 | | | | Total Payload Length |

Table 7.5.15: MSG_MASK_SATELLITE 0x002B message structure

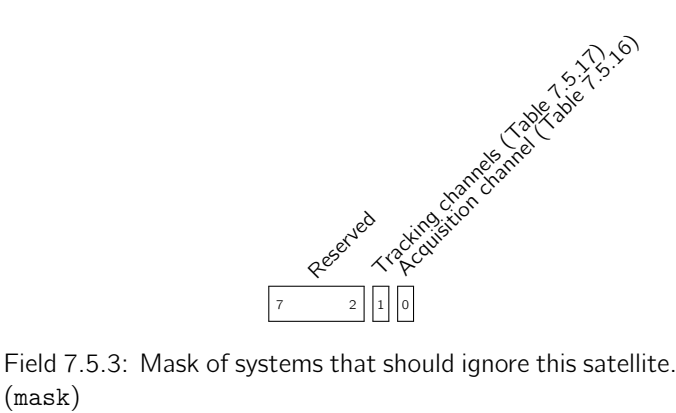

| Value | Description |
|-------|--|
| 0 | Enabled |
| 1 | Skip this satellite on future acquisitions |

Table 7.5.16: Acquisition channel values (mask[0])

| Value | Description |
|-------|-------------------------------------|
| 0 | Enabled |
| 1 | Drop this PRN if currently tracking |

Table 7.5.17: Tracking channels values (mask[1])

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 7.5.18: values (sid.code[0:7])

Field 7.5.4: Signal constellation, band and code (sid.code)

MSG_DEVICE_MONITOR — 0x00B5 — 181

This message contains temperature and voltage level measurements from the processor's monitoring system and the RF frontend die temperature if available.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-----------------|-----------------|-------------------------------------|
| 0 | 2 | s16 | V / 1000 | dev_vin | Device V _{in} |
| 2 | 2 | s16 | V / 1000 | cpu_vint | Processor V _{int} |
| 4 | 2 | s16 | V / 1000 | cpu_vaux | Processor V _{aux} |
| 6 | 2 | s16 | degrees C / 100 | cpu_temperature | Processor temperature |
| 8 | 2 | s16 | degrees C / 100 | fe_temperature | Frontend temperature (if available) |
| 10 | | | | | Total Payload Length |

Table 7.5.19: MSG_DEVICE_MONITOR 0x00B5 message structure

MSG COMMAND REQ — 0x00B8 — 184

Request the recipient to execute an command. Output will be sent in MSG_LOG messages, and the exit code will be returned with MSG_COMMAND_RESP.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|-------------------------|
| 0 | 4 | u32 | | sequence | Sequence number |
| 4 | N | string | | command | Command line to execute |
| | $N + 4$ | | | | Total Payload Length |

Table 7.5.20: MSG_COMMAND_REQ 0x00B8 message structure

MSG COMMAND RESP — 0x00B9 — 185

The response to MSG_COMMAND_REQ with the return code of the command. A return code of zero indicates success.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|----------------------|
| 0 | 4 | u32 | | sequence | Sequence number |
| 4 | 4 | s32 | | code | Exit code |
| | 8 | | | | Total Payload Length |

Table 7.5.21: MSG_COMMAND_RESP 0x00B9 message structure

MSG COMMAND OUTPUT — 0x00BC — 188

Returns the standard output and standard error of the command requested by MSG_COMMAND_REQ. The sequence number can be used to filter for filtering the correct command.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|---|
| 0 | 4 | u32 | | sequence | Sequence number |
| 4 | N | string | | line | Line of standard output or standard error |
| | $N + 4$ | | | | Total Payload Length |

Table 7.5.22: MSG_COMMAND_OUTPUT 0x00BC message structure

MSG_NETWORK_STATE_REQ — 0x00BA — 186

Request state of Piksi network interfaces. Output will be sent in MSG_NETWORK_STATE_RESP messages

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|------|----------------------|
| | 0 | | | | Total Payload Length |

Table 7.5.23: MSG_NETWORK_STATE_REQ 0x00BA message structure

MSG_NETWORK_STATE_RESP — 0x00BB — 187

The state of a network interface on the Piksi. Data is made to reflect output of ifaddrs struct returned by getifaddrs in c.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------------|--|
| 0 | 4 | u8[4] | | ipv4_address | IPv4 address (all zero when unavailable) |
| 4 | 1 | u8 | | ipv4_mask_size | IPv4 netmask CIDR notation |
| 5 | 16 | u8[16] | | ipv6_address | IPv6 address (all zero when unavailable) |
| 21 | 1 | u8 | | ipv6_mask_size | IPv6 netmask CIDR notation |
| 22 | 4 | u32 | | rx_bytes | Number of Rx bytes |
| 26 | 4 | u32 | | tx_bytes | Number of Tx bytes |
| 30 | 16 | string | | interface_name | Interface Name |
| 46 | 4 | u32 | | flags | Interface flags from SIOCGIFFLAGS |
| 50 | | | | | Total Payload Length |

Table 7.5.24: MSG_NETWORK_STATE_RESP 0x00BB message structure

MSG_NETWORK_BANDWIDTH_USAGE — 0x00BD — 189

The bandwidth usage, a list of usage by interface.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|-----------------|--------|-------|---|---|
| $40N + 0$ | 8 | u64 | ms | <code>interfaces[N].duration</code> | Duration over which the measurement was collected |
| $40N + 8$ | 8 | u64 | | <code>interfaces[N].total_bytes</code> | Number of bytes handled in total within period |
| $40N + 16$ | 4 | u32 | | <code>interfaces[N].rx_bytes</code> | Number of bytes transmitted within period |
| $40N + 20$ | 4 | u32 | | <code>interfaces[N].tx_bytes</code> | Number of bytes received within period |
| 24 | 16 | string | | <code>interfaces[N].interface_name</code> | Interface Name |
| $40N$ | | | | | Total Payload Length |

Table 7.5.25: MSG_NETWORK_BANDWIDTH_USAGE 0x00BD message structure

MSG_CELL_MODEM_STATUS — 0x00BE — 190

If a cell modem is present on a piksi device, this message will be send periodically to update the host on the status of the modem and its various parameters.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|--------------------------------|--|
| 0 | 1 | s8 | dBm | <code>signal_strength</code> | Received cell signal strength in dBm, zero translates to unknown |
| 1 | 4 | float | | <code>signal_error_rate</code> | BER as reported by the modem, zero translates to unknown |
| 5 | N | u8[N] | | <code>reserved</code> | Unspecified data TBD for this schema |
| | $N + 5$ | | | | Total Payload Length |

Table 7.5.26: MSG_CELL_MODEM_STATUS 0x00BE message structure

MSG SPECAN — 0x0051 — 81

Spectrum analyzer packet.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|----------------|-------|-----------------|--|
| 0 | 2 | u16 | | channel_tag | Channel ID |
| 2 | 4 | u32 | ms | t.tow | Milliseconds since start of GPS week |
| 6 | 4 | s32 | ns | t.ns_residual | Nanosecond residual of millisecond-rounded TOW (ranges from -500000 to 500000) |
| 10 | 2 | u16 | week | t.wn | GPS week number |
| 12 | 4 | float | MHz | freq_ref | Reference frequency of this packet |
| 16 | 4 | float | MHz | freq_step | Frequency step of points in this packet |
| 20 | 4 | float | dB | amplitude_ref | Reference amplitude of this packet |
| 24 | 4 | float | dB | amplitude_unit | Amplitude unit value of points in this packet |
| 28 | <i>N</i> | u8[<i>N</i>] | | amplitude_value | Amplitude values (in the above units) of points in this packet |
| <i>N</i> + 28 | | | | | Total Payload Length |

Table 7.5.27: MSG.SPECAN 0x0051 message structure

MSG FRONT END GAIN — 0x00BF — 191

This message describes the gain of each channel in the receiver frontend. Each gain is encoded as a non-dimensional percentage relative to the maximum range possible for the gain stage of the frontend. By convention, each gain array has 8 entries and the index of the array corresponding to the index of the rf channel in the frontend. A gain of 127 percent encodes that rf channel is not present in the hardware. A negative value implies an error for the particular gain stage as reported by the frontend.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---------|----------------------|---|
| 0 | 8 | s8[8] | percent | <code>rf_gain</code> | RF gain for each frontend channel |
| 8 | 8 | s8[8] | percent | <code>if_gain</code> | Intermediate frequency gain for each frontend channel |
| 16 | | | | | Total Payload Length |

Table 7.5.28: MSG_FRONT_END_GAIN 0x00BF message structure

7.6 Sbas

SBAS data


MSG SBAS RAW — 0x7777 — 30583

This message is sent once per second per SBAS satellite. ME checks the parity of the data block and sends only blocks that pass the check.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|--------------|--|
| 0 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 1 | 1 | u8 | | sid.code | Signal constellation, band and code |
| 2 | 4 | u32 | ms | tow | GPS time-of-week at the start of the data block. |
| 6 | 1 | u8 | | message_type | SBAS message type (0-63) |
| 7 | 27 | u8[27] | | data | Raw SBAS data field of 212 bits (last byte padded with zeros). |
| 34 | | | | | Total Payload Length |

Table 7.6.1: MSG_SBAS_RAW 0x7777 message structure

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |



Field 7.6.1: Signal constellation, band and code (sid.code)

Table 7.6.2: values (sid.code[0:7])

7.7 Ssr


Precise State Space Representation (SSR) corrections format

MSG SSR ORBIT CLOCK — 0x05DD — 1501

The precise orbit and clock correction message is to be applied as a delta correction to broadcast ephemeris and is typically an equivalent to the 1060 and 1066 RTCM message types

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------------------------|-----------------|--|
| 0 | 4 | u32 | s | time.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | time.wn | GPS week number |
| 6 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 7 | 1 | u8 | | sid.code | Signal constellation, band and code |
| 8 | 1 | u8 | | update_interval | Update interval between consecutive corrections. Encoded following RTCM DF391 specification. |
| 9 | 1 | u8 | | iod_ssr | IOD of the SSR correction. A change of Issue Of Data SSR is used to indicate a change in the SSR generating configuration |
| 10 | 4 | u32 | | iod | Issue of broadcast ephemeris data or IOD-CRC (Beidou) |
| 14 | 4 | s32 | 0.1 mm | radial | Orbit radial delta correction |
| 18 | 4 | s32 | 0.4 mm | along | Orbit along delta correction |
| 22 | 4 | s32 | 0.4 mm | cross | Orbit along delta correction |
| 26 | 4 | s32 | 0.001 mm/s | dot_radial | Velocity of orbit radial delta correction |
| 30 | 4 | s32 | 0.004 mm/s | dot_along | Velocity of orbit along delta correction |
| 34 | 4 | s32 | 0.004 mm/s | dot_cross | Velocity of orbit cross delta correction |
| 38 | 4 | s32 | 0.1 mm | c0 | C0 polynomial coefficient for correction of broadcast satellite clock |
| 42 | 4 | s32 | 0.001 mm/s | c1 | C1 polynomial coefficient for correction of broadcast satellite clock |
| 46 | 4 | s32 | 0.00002 mm/s ⁻² | c2 | C2 polynomial coefficient for correction of broadcast satellite clock |
| 50 | | | | | Total Payload Length |

Table 7.7.1: MSG_SSR_ORBIT_CLOCK 0x05DD message structure



Field 7.7.1: Signal constellation, band and code (sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |


Table 7.7.2: values (sid.code[0:7])

MSG SSR ORBIT CLOCK DEP A — 0x05DC — 1500

The precise orbit and clock correction message is to be applied as a delta correction to broadcast ephemeris and is typically an equivalent to the 1060 and 1066 RTCM message types

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|----------------------------|-----------------|--|
| 0 | 4 | u32 | s | time.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | time.wn | GPS week number |
| 6 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 7 | 1 | u8 | | sid.code | Signal constellation, band and code |
| 8 | 1 | u8 | | update_interval | Update interval between consecutive corrections. Encoded following RTCM DF391 specification. |
| 9 | 1 | u8 | | iod_ssr | IOD of the SSR correction. A change of Issue Of Data SSR is used to indicate a change in the SSR generating configuration |
| 10 | 1 | u8 | | iod | Issue of broadcast ephemeris data |
| 11 | 4 | s32 | 0.1 mm | radial | Orbit radial delta correction |
| 15 | 4 | s32 | 0.4 mm | along | Orbit along delta correction |
| 19 | 4 | s32 | 0.4 mm | cross | Orbit along delta correction |
| 23 | 4 | s32 | 0.001 mm/s | dot_radial | Velocity of orbit radial delta correction |
| 27 | 4 | s32 | 0.004 mm/s | dot_along | Velocity of orbit along delta correction |
| 31 | 4 | s32 | 0.004 mm/s | dot_cross | Velocity of orbit cross delta correction |
| 35 | 4 | s32 | 0.1 mm | c0 | C0 polynomial coefficient for correction of broadcast satellite clock |
| 39 | 4 | s32 | 0.001 mm/s | c1 | C1 polynomial coefficient for correction of broadcast satellite clock |
| 43 | 4 | s32 | 0.00002 mm/s ⁻² | c2 | C2 polynomial coefficient for correction of broadcast satellite clock |
| 47 | | | | | Total Payload Length |

Table 7.7.3: MSG_SSR_ORBIT_CLOCK_DEP_A 0x05DC message structure



Field 7.7.2: Signal constellation, band and code (sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 7.7.4: values (sid.code[0:7])

MSG SSR CODE BIASES — 0x05E1 — 1505

The precise code biases message is to be added to the pseudorange of the corresponding signal to get corrected pseudorange. It is typically an equivalent to the 1059 and 1065 RTCM message types

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|--------|-----------------|--|
| 0 | 4 | u32 | s | time.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | time.wn | GPS week number |
| 6 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 7 | 1 | u8 | | sid.code | Signal constellation, band and code |
| 8 | 1 | u8 | | update_interval | Update interval between consecutive corrections. Encoded following RTCM DF391 specification. |
| 9 | 1 | u8 | | iod_ssr | IOD of the SSR correction. A change of Issue Of Data SSR is used to indicate a change in the SSR generating configuration |
| 3N + 10 | 1 | u8 | | biases[N].code | Signal constellation, band and code |
| 3N + 11 | 2 | s16 | 0.01 m | biases[N].value | Code bias value |
| 3N + 10 | | | | | Total Payload Length |

Table 7.7.5: MSG_SSR_CODE_BIASES 0x05E1 message structure

(Table 7.7.6)

7

0


Field 7.7.3: Signal constellation, band and code (sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 7.7.6: values (sid.code[0:7])

MSG SSR PHASE BIASES — 0x05E6 — 1510

The precise phase biases message contains the biases to be added to the carrier phase of the corresponding signal to get corrected carrier phase measurement, as well as the satellite yaw angle to be applied to compute the phase wind-up correction. It is typically an equivalent to the 1265 RTCM message types



Field 7.7.4: Signal constellation, band and code (sid.code)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 7.7.8: values (sid.code[0:7])

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-----------------|--------------------------------------|--|
| 0 | 4 | u32 | s | time.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | time.wn | GPS week number |
| 6 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 7 | 1 | u8 | | sid.code | Signal constellation, band and code |
| 8 | 1 | u8 | | update_interval | Update interval between consecutive corrections. Encoded following RTCM DF391 specification. |
| 9 | 1 | u8 | | iod_ssr | IOD of the SSR correction. A change of Issue Of Data SSR is used to indicate a change in the SSR generating configuration |
| 10 | 1 | u8 | | dispersive_bias | Indicator for the dispersive phase biases property. |
| 11 | 1 | u8 | | mw_consistency | Consistency indicator for Melbourne-Wubben linear combinations |
| 12 | 2 | u16 | 1 / 256 | yaw | Satellite yaw angle |
| 14 | 1 | s8 | 1 / 8192 | yaw_rate | Satellite yaw angle rate |
| | | | semi-circle / s | | |
| $8N + 15$ | 1 | u8 | | biases[N].code | Signal constellation, band and code |
| $8N + 16$ | 1 | u8 | | biases[N].integer_indicator | Indicator for integer property |
| $8N + 17$ | 1 | u8 | | biases[N].widelane_integer_indicator | Indicator for two groups of Wide-Lane(s) integer property |
| $8N + 18$ | 1 | u8 | | biases[N].discontinuity_counter | Signal phase discontinuity counter. Increased for every discontinuity in phase. |
| $8N + 19$ | 4 | s32 | 0.1 mm | biases[N].bias | Phase bias for specified signal |
| $8N + 15$ | | | | | Total Payload Length |

Table 7.7.7: MSG_SSR_PHASE_BIASES 0x05E6 message structure

MSG SSR STEC CORRECTION — 0x05EB — 1515

The STEC per space vehicle, given as polynomial approximation for a given grid. This should be combined with MSG_SSR_GRIDDED_CORRECTION message to get the state space representation of the atmospheric delay. It is typically equivalent to the QZSS CLAS Sub Type 8 messages

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|-----------------|--------|---|---|---|
| 0 | 4 | u32 | s | header.time.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | header.time.wn | GPS week number |
| 6 | 1 | u8 | | header.num_msgs | Number of messages in the dataset |
| 7 | 1 | u8 | | header.seq_num | Position of this message in the dataset |
| 8 | 1 | u8 | | header.update_interval | Update interval between consecutive corrections. Encoded following RTCM DF391 specification. |
| 9 | 1 | u8 | | header.iod_atmo | IOD of the SSR atmospheric correction |
| 11N + 10 | 1 | u8 | | stec_sat_list[N].sv_id.satId | ID of the space vehicle within its constellation |
| 11N + 11 | 1 | u8 | | stec_sat_list[N].sv_id.constellation | Constellation ID to which the SV belongs |
| 11N + 12 | 1 | u8 | | stec_sat_list[N].stec_quality_indicator | Quality of the STEC data. Encoded following RTCM DF389 specification but in units of TECU instead of m. |
| 13 | 8 | s16[4] | C00 = 0.05 TECU, others = 0.02 TECU/deg | stec_sat_list[N].stec_coeff | Coefficients of the STEC polynomial in the order of C00, C01, C10, C11 |
| 11N + 10 | | | | | Total Payload Length |

Table 7.7.9: MSG_SSR_STEC_CORRECTION 0x05EB message structure

MSG SSR GRIDDED CORRECTION NO STD — 0x05F0 — 1520

This message was deprecated when variances (stddev) were added.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|---|---|--|
| 0 | 4 | u32 | s | header.time.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | header.time.wn | GPS week number |
| 6 | 2 | u16 | | header.num_msgs | Number of messages in the dataset |
| 8 | 2 | u16 | | header.seq_num | Position of this message in the dataset |
| 10 | 1 | u8 | | header.update_interval | Update interval between consecutive corrections. Encoded following RTCM DF391 specification. |
| 11 | 1 | u8 | | header.iod_atmo | IOD of the SSR atmospheric correction |
| 12 | 1 | u8 | | header.tropo_quality_indicator | Quality of the troposphere data. Encoded following RTCM DF389 specification in units of m. |
| 13 | 2 | u16 | | element.index | Index of the grid point |
| 15 | 2 | s16 | 4 mm (add 2.3 m to get actual vertical hydro delay) | element.tropo_delay_correction.hydro | Hydrostatic vertical delay |
| 17 | 1 | s8 | 4 mm (add 0.252 m to get actual vertical wet delay) | element.tropo_delay_correction.wet | Wet vertical delay |
| 4N+18 | 1 | u8 | | element.stec_residuals[N].sv_id.satId | ID of the space vehicle within its constellation |
| 4N+19 | 1 | u8 | | element.stec_residuals[N].sv_id.constellation | Constellation ID to which the SV belongs |
| 4N+20 | 2 | s16 | 0.04 TECU | element.stec_residuals[N].residual | STEC residual |
| 4N+18 | | | | | Total Payload Length |

Table 7.7.10: MSG_SSR_GRIDDED_CORRECTION_NO_STD 0x05F0 message structure

MSG SSR GRIDDED CORRECTION — 0x05FA — 1530

STEC residuals are per space vehicle, tropo is not. It is typically equivalent to the QZSS CLAS Sub Type 9 messages

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|-----------------|--------|--|---|--|
| 0 | 4 | u32 | s | header.time.tow | Seconds since start of GPS week |
| 4 | 2 | u16 | week | header.time.wn | GPS week number |
| 6 | 2 | u16 | | header.num_msgs | Number of messages in the dataset |
| 8 | 2 | u16 | | header.seq_num | Position of this message in the dataset |
| 10 | 1 | u8 | | header.update_interval | Update interval between consecutive corrections. Encoded following RTCM DF391 specification. |
| 11 | 1 | u8 | | header.iod_atmo | IOD of the SSR atmospheric correction |
| 12 | 1 | u8 | | header.tropo_quality_indicator | Quality of the troposphere data. Encoded following RTCM DF389 specification in units of m. |
| 13 | 2 | u16 | | element.index | Index of the grid point |
| 15 | 2 | s16 | 4 mm (add 2.3 m to get actual vertical hydro delay) | element.tropo_delay_correction.hydro | Hydrostatic vertical delay |
| 17 | 1 | s8 | 4 mm (add 0.252 m to get actual vertical wet delay) | element.tropo_delay_correction.wet | Wet vertical delay |
| 18 | 1 | u8 | modified DF389 scale; class is upper 3 bits, value is lower 5 std- dev $i = (3^{\text{class}} * (1 + \text{value}/16) - 1)$ mm | element.tropo_delay_correction.stddev | stddev |
| 5N+19 | 1 | u8 | | element.stec_residuals[N].sv_id.satId | ID of the space vehicle within its constellation |
| 5N+20 | 1 | u8 | | element.stec_residuals[N].sv_id.constellation | Constellation ID to which the SV belongs |

MSG SSR GRID DEFINITION — 0x05F5 — 1525

Based on the 3GPP proposal R2-1906781 which is in turn based on OMA-LPPE-ValidityArea from OMA-TS-LPPE-V2_0-20141202-C

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|-------------------|-----------------|----------------|----------------------|---|---|
| 0 | 1 | u8 | inverse de- grees | <code>header.region_size_inverse</code> | $\text{region_size (deg)} = 10 / \text{region_size_inverse}$ 0 is an invalid value. |
| 1 | 2 | u16 | | <code>header.area_width</code> | $\text{grid height (deg)} = \text{grid idth (deg)} = \text{area_width} / \text{region_size}$ 0 is an invalid value. |
| 3 | 2 | u16 | | <code>header.lat_nw_corner_enc</code> | North-West corner latitdue (deg) = $\text{region_size} * \text{lat_nw_corner_enc} - 90$ |
| 5 | 2 | u16 | | <code>header.lon_nw_corner_enc</code> | North-West corner longitude (deg) = $\text{region_size} * \text{lon_nw_corner_enc} - 180$ |
| 7 | 1 | u8 | | <code>header.num_msgs</code> | Number of messages in the dataset |
| 8 | 1 | u8 | | <code>header.seq_num</code> | Postion of this message in the dataset |
| 9 | <i>N</i> | u8[<i>N</i>] | | <code>rle_list</code> | Run Length Encode list of quadrants that contain valid data. The spec describes the encoding scheme in detail, but essentially the index of the quadrants that contain transitions between valid and invalid (and vice versa) are encoded as u8 integers. |
| <i>N + 9</i> | | | | | Total Payload Length |

Table 7.7.12: MSG_SSR_GRID_DEFINITION 0x05F5 message structure

7.8 Tracking

Satellite code and carrier-phase tracking messages from the device.


MSG TRACKING STATE — 0x0041 — 65

The tracking message returns a variable-length array of tracking channel states. It reports status and carrier-to-noise density measurements for all tracked satellites.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-----------|---------------------------------|--|
| $4N + 0$ | 1 | u8 | | <code>states[N].sid.sat</code> | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| $4N + 1$ | 1 | u8 | | <code>states[N].sid.code</code> | Signal constellation, band and code |
| $4N + 2$ | 1 | u8 | | <code>states[N].fcn</code> | Frequency channel number (GLONASS only) |
| $4N + 3$ | 1 | u8 | dB Hz / 4 | <code>states[N].cn0</code> | Carrier-to-Noise density. Zero implies invalid cn0. |
| $4N$ | | | | | Total Payload Length |

Table 7.8.1: MSG_TRACKING_STATE 0x0041 message structure

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |



Field 7.8.1: Signal constellation, band and code (`sid.code`)

Table 7.8.2: values (`sid.code[0:7]`)

MSG MEASUREMENT STATE — 0x0061 — 97

The tracking message returns a variable-length array of tracking channel states. It reports status and carrier-to-noise density measurements for all tracked satellites.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-----------|-----------------------------------|--|
| $3N + 0$ | 1 | u8 | | <code>states[N].mesid.sat</code> | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| $3N + 1$ | 1 | u8 | | <code>states[N].mesid.code</code> | Signal constellation, band and code |
| $3N + 2$ | 1 | u8 | dB Hz / 4 | <code>states[N].cn0</code> | Carrier-to-Noise density. Zero implies invalid cn0. |
| $3N$ | | | | | Total Payload Length |

Table 7.8.3: MSG_MEASUREMENT_STATE 0x0061 message structure

(Table 7.8.4)

7

0

Field 7.8.2: Signal constellation, band and code (`mesid.code`)

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

Table 7.8.4: values (`mesid.code[0:7]`)


MSG TRACKING IQ — 0x002D — 45

When enabled, a tracking channel can output the correlations at each update interval.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------------------|--|
| 0 | 1 | u8 | | channel | Tracking channel of origin |
| 1 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 2 | 1 | u8 | | sid.code | Signal constellation, band and code |
| 4N + 3 | 2 | s16 | | corrs[N].I | In-phase correlation |
| 4N + 5 | 2 | s16 | | corrs[N].Q | Quadrature correlation |
| 4N + 3 | | | | Total Payload Length | |

Table 7.8.5: MSG_TRACKING_IQ 0x002D message structure

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |



Field 7.8.3: Signal constellation, band and code (sid.code)

Table 7.8.6: values (sid.code[0:7])


MSG TRACKING IQ DEP B — 0x002C — 44

When enabled, a tracking channel can output the correlations at each update interval.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------------------|--|
| 0 | 1 | u8 | | channel | Tracking channel of origin |
| 1 | 1 | u8 | | sid.sat | Constellation-specific satellite identifier. This field for Glonass can either be (100+FCN) where FCN is in [-7,+6] or the Slot ID in [1,28] |
| 2 | 1 | u8 | | sid.code | Signal constellation, band and code |
| 8N + 3 | 4 | s32 | | corrs[N].I | In-phase correlation |
| 8N + 7 | 4 | s32 | | corrs[N].Q | Quadrature correlation |
| 8N + 3 | | | | Total Payload Length | |

Table 7.8.7: MSG_TRACKING_IQ_DEP_B 0x002C message structure

| Value | Description |
|-------|-------------|
| 0 | GPS L1CA |
| 1 | GPS L2CM |
| 2 | SBAS L1CA |
| 3 | GLO L1CA |
| 4 | GLO L2CA |
| 5 | GPS L1P |
| 6 | GPS L2P |
| 12 | BDS2 B1 |
| 13 | BDS2 B2 |
| 14 | GAL E1B |
| 20 | GAL E7I |

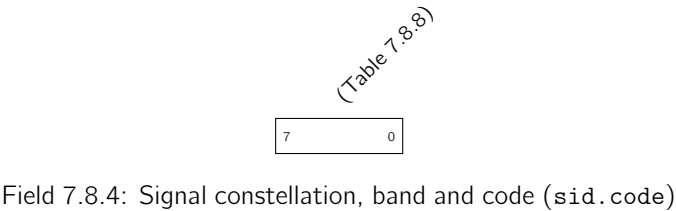

Field 7.8.4: Signal constellation, band and code (sid.code)

Table 7.8.8: values (sid.code[0:7])

7.9 User

Messages reserved for use by the user.

MSG USER DATA — 0x0800 — 2048

This message can contain any application specific user data up to a maximum length of 255 bytes per message.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|----------|----------------------|
| 0 | N | u8[N] | | contents | User data payload |
| | N | | | | Total Payload Length |

Table 7.9.1: MSG_USER_DATA 0x0800 message structure

7.10 Vehicle

Messages from a vehicle.

MSG ODOMETRY — 0x0903 — 2307


Message representing the x component of vehicle velocity in the user frame at the odometry reference point(s) specified by the user. The offset for the odometry reference point and the definition and origin of the user frame are defined through the device settings interface. There are 4 possible user-defined sources of this message which are labeled arbitrarily source 0 through 3. If using "processor time" time tags, the receiving end will expect a 'MSG_GNSS_TIME_OFFSET' when a PVT fix becomes available to synchronise odometry measurements with GNSS.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|-------|-----------------------|---|
| 0 | 4 | u32 | ms | <code>tow</code> | Time field representing either milliseconds in the GPS Week or local CPU time from the producing system in milliseconds. See the <code>tow_source</code> flag for the exact source of this timestamp. |
| 4 | 4 | s32 | mm/s | <code>velocity</code> | The signed forward component of vehicle velocity. |
| 8 | 1 | u8 | | <code>flags</code> | Status flags |
| | 9 | | | | Total Payload Length |

Table 7.10.1: MSG_ODOMETRY 0x0903 message structure

| Value | Description |
|-------|---------------------------|
| 0 | None (invalid) |
| 1 | GPS Solution (ms in week) |
| 2 | Processor Time |

Table 7.10.2: Time source values (`flags[0:2]`)



Field 7.10.1: Status flags (`flags`)

| Value | Description |
|-------|-------------|
| 0 | Source 0 |
| 1 | Source 1 |
| 2 | Source 2 |
| 3 | Source 3 |

Table 7.10.3: Velocity Source values (`flags[3:4]`)

MSG_WHEELTICK — 0x0904 — 2308

Message containing the accumulated distance travelled by a wheel located at an odometry reference point defined by the user. The offset for the odometry reference point and the definition and origin of the user frame are defined through the device settings interface. The source of this message is identified by the source field, which is an integer ranging from 0 to 255. The timestamp associated with this message should represent the time when the accumulated tick count reached the value given by the contents of this message as accurately as possible. If using "local CPU time" time tags, the receiving end will expect a 'MSG_GNSS_TIME_OFFSET' when a PVT fix becomes available to synchronise wheeltick measurements with GNSS.

| Offset (bytes) | Size (bytes) | Format | Units | Name | Description |
|----------------|--------------|--------|--------------------------|--------|---|
| 0 | 8 | u64 | us | time | Time field representing either microseconds since the last PPS, microseconds in the GPS Week or local CPU time from the producing system in microseconds. See the synch_type field for the exact meaning of this timestamp. |
| 8 | 1 | u8 | | flags | Field indicating the type of timestamp contained in the time field. |
| 9 | 1 | u8 | | source | ID of the sensor producing this message |
| 10 | 4 | s32 | arbitrary distance units | ticks | Free-running counter of the accumulated distance for this sensor. The counter should be incrementing if travelling into one direction and decrementing when travelling in the opposite direction. |
| 14 | | | | | Total Payload Length |

Table 7.10.4: MSG_WHEELTICK 0x0904 message structure

Reserved

Synchronization type (Table 7.10.5)

7

2

10

Field 7.10.2: Field indicating the type of timestamp contained in the time field. (flags)

| Value | Description |
|-------|--|
| 0 | microseconds since last PPS |
| 1 | microseconds in GPS week |
| 2 | local CPU time in nominal microseconds |

Table 7.10.5: Synchronization type values (flags[0:1])