

## Practical 01

### Assembly Language

THIS IS A PROCTORED PRACTICAL

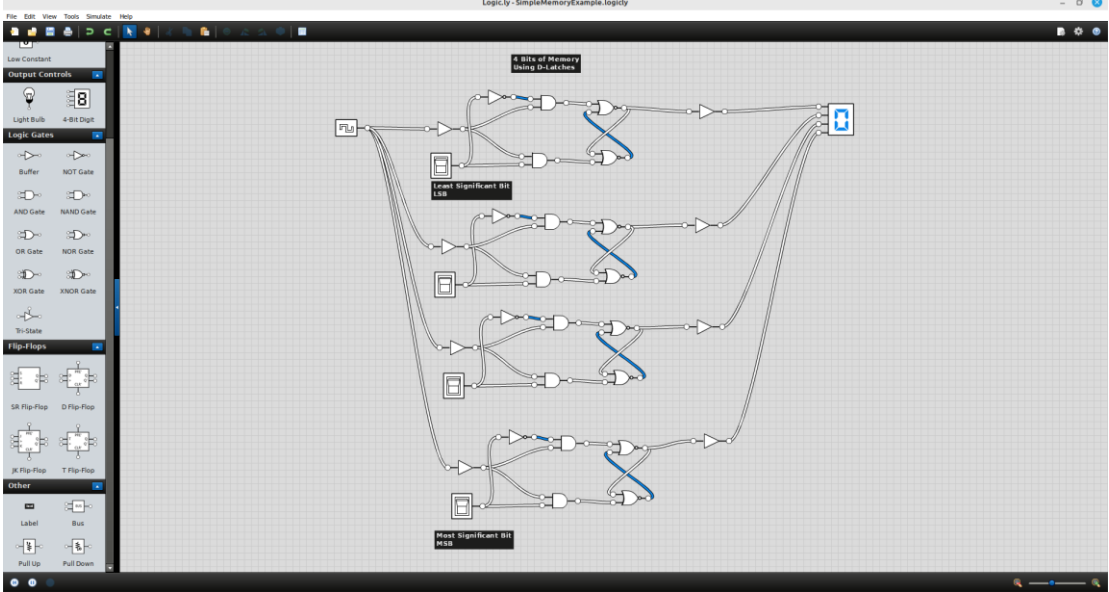
YOU MUST SHARE YOUR SCREEN SO YOUR PARTICIPATION IN THIS PRACTICAL CAN FULLY INVIGILATED

1. Create a Github repository "Assembly\_and\_C"
2. Create a sub directory PRACTICAL\_01
3. Add Github link to CA Spreadsheet  
e.g [https://STUDENTID.github.com/Assembly\\_and\\_c/PRACTICAL\\_01](https://STUDENTID.github.com/Assembly_and_c/PRACTICAL_01)
4. Invite Lab Supervisors including MakeMuddyGames as a collaborators
5. Go to designated group to complete practical
6. Upload completed Practical files to Github repository

NOTE: Use of EASy68K editor and emulator allowed, use of internet allowed, use of slide deck(s) allowed. Installer located here <http://www.easy68k.com/>

Create a unique file **e.g. part1.X68** for each practical section below.

**Objective** Understand and utilise Basic Memory concepts, BINARY, HEX and Literals:

1	<p>Create a new 68K project and name the file <b>part1.logicly</b></p> <p>Create the following circuit using logic.ly</p>	<p>Store the following Decimal Values as Binary (Bits LSB to MSB)</p> <p>0 to 15</p>
		
2	<p>Create a new 68K project and name the file <b>part2.X68</b></p> <p>Edit compile and execute the code across, examine and note contents of data registers and memory. Identify the memory location of \$3000 and its contents.</p>	<pre>MOVE.L  #00001111,D1 MOVE.B  D1,D2 MOVE.B  D1,\$2000 MOVE.B  \$2000,D2 MOVE.B  \$2000,\$3000</pre>
3	<p>Create a new 68K project and name the file <b>part3.X68</b></p>	<pre>ORG     \$1000 START: MOVE.B  #\$64,D1 LEA text, A1</pre>

## Practical 01

### Assembly Language

	Edit compile and execute the code across and observe the output.	<pre> MOVE #14,D0 TRAP #15  MOVE #3,D0 TRAP #15  SIMHALT  text dc.b 'Data Register: ',0  END START </pre>
4	Create a new 68K project and name the file <b>part4.X68</b>  Edit compile and execute the code across and observe the input and output.	<pre> ORG \$1000 START:     LEA text, A1     MOVE #4,D0     TRAP #15     MOVE #14,D0     TRAP #15     MOVE #3,D0     TRAP #15  SIMHALT text dc.b 'Data Register: ',0  END START </pre>

**Demonstrate completed assembly files at the end of the LAB and ensure it has been checked**

<b>Student Name</b>	Oisin Miley	<b>Student Number</b>	C00273450
<b>Date</b>	15/01/25	<b>Checked</b>	yes