Interpreting the paused test

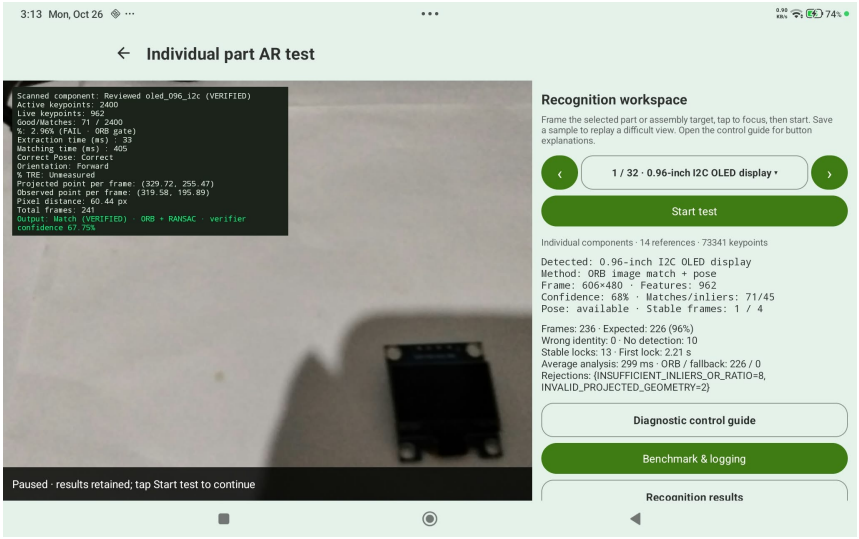


Figure 1. User-supplied paused OLED test; the report transcribes its displayed values.

7. Session results measure detection frequency

226 / 236 tester frames = 95.76%, displayed as 96%. This is the frequency of expected detections in this run, not ORB match yield or independently validated classification accuracy. The session shows 10 no-detection frames, 0 wrong-identity frames, 13 stable locks and a first lock at 2.21 seconds.

Stable frames: 1/4 means the displayed observation had not completed a new stability streak; earlier locks remain counted. **Total frames: 241** is the cumulative analyzer counter, whereas 236 belongs to this tester result group. Pause retained results; it did not convert the 85% gate into a pass.

8. What this view does and does not prove

The selected OLED was recognized repeatedly, and the displayed frame had spatially verified ORB evidence. The separate 85% yield criterion failed. This view does not establish a calibrated recognition probability, dataset-wide accuracy, physical seating or electrical continuity.

TRE remains Unmeasured without independent metric ground truth. The **60.44 px** center-to-inlier-centroid distance compares different point definitions; it is not solver RMS reprojection error. Extraction **33 ms** and matching **405 ms** describe the displayed frame, not the full human recognition task.

9. Reporting recommendation - no code change

Report **match yield**, **RANSAC inlier fraction**, **recognition outcome** and **session detection rate** separately. The requested 85% yield rule is not a validated universal recognition-success criterion. Do not change counts, denominators or thresholds merely to obtain PASS; justify any future protocol revision using labeled positive and negative trials.

Basis: supplied screenshot and read-only inspection of DiagnosticScanTelemetry, DiagnosticHammingMatcher, OrbMatchPolicy, ComponentRecognizer and VisionConfig. No application code or scan thresholds changed.