NVIDIA Jetson TX2 J21 Header Pinout

JETSON TX2 HEADER PINOUT

This is the Jetson TX2 J21 GPIO Header Layout. This is the second version of this table but may not be completely accurate. Last updated 5-19-17
The GPIO numbering is different than the Jetson TX1 table.

		Jetson TX2 J21 Header		
Sysfs GPIO	Name	Pin	Pin	
	3.3 VDC *Power*	1	2	**5.0 VDC** *Power*
	I2C_GP_DAT *General I2C #0 Data 3.3.V*	3	4	**5.0 VDC** *Power*
	I2C_GP_CLK *General I2C #0 Clock 3.3.V*	5	6	**GND**
	AUDIO_MCLK			**UART0_T**

RECENT ARTICLES

RACECAR/J – Hokuyo UST-10LX Configuration
RACECAR/J – Hokuyo UST-10LX Lidar
Skydio R1 – Jetson TX1 Based Self-Flying Camera
RACECAR/J – Programming the Electronic Speed Controller
Install USB to Serial Converter Kernel Modules – L4T 28.1
RACECAR/J Software Install

CATEGORIES

Android
Caffe
CUDA
Deep Learning
Featured
GPIO/I2C

	Audio Master Clock (1.8/3.3.V)	7	8	*UART #0*
	GND	9	10	**UART0_R** *UART #0*
	UART0_RTS# *UART #0 Request to Send*	11	12	**I2S0_SCL** *Audio I2S*
	GPIO_PE6 *Audio Code Interrupt*	13	14	**GND**
	GPIO_EXP_P17_3V3 *From GPIO Expander (P17)*	15	16	**AO_DMI** *Unused*
	3.3 VDC *Power*	17	18	**GPIO16_** *Modem W*
	SPI_MOSI *SPI #1 Master Out/Slave In*	19	20	**GND**
	SPI1_MISO *SPI #1 Master In/Slave Out*	21	22	**GPIO_EX** *From GPI*
	SPI_CLK *SPI #1 Shift Clock*	23	24	**SPI1_CS0** *SPI #1 Ch*
	GND	25	26	**SPI1_CS1** *SPI #1 Ch*
	I2C_GP1_DAT *General I2C #1 Data (3.3V)*	27	28	**I2C_GP1_** *General I2 (3.3V)*
gpio398	**GPIO19_AUD_RST** *Audio Reset (1.8/3.3V)*	29	30	**GND**
gpio298	**GPIO9_MOTION_INT**	31	32	**AO_DMI**

Grinch
Gstreamer
GTC
GTC 2015
GTC 2016
Hardware
Information
JetPack
Jetson Drone
Jetson RACECAR
Jetson Rover
Jetson TX1
Jetson TX2
JetsonBot
News
OpenCV
Operating System
Programming
Qt
RACECAR/J
Robotics
ROS
Software
TensorFlow
Torch
UPenn ARC
Vision

TAGS

	Motion Interrupt (3.3V)			*Unused*
gpio389	**GPIO11_AP_WAKE_BT** *AP Wake Bt GPIO*	33	34	**GND**
	I2S0_LRCLK *AUDIO I2S #0 Left/Right Clock*	35	36	**UART0_C** *UART #0*
gpio388	**GPIO8_ALS_PROX_INT** *(3.3V)*	37	38	**I2S0_SDI** *Audio I2S*
	GND	39	40	**I2S0_SDC** *Audio I2S*

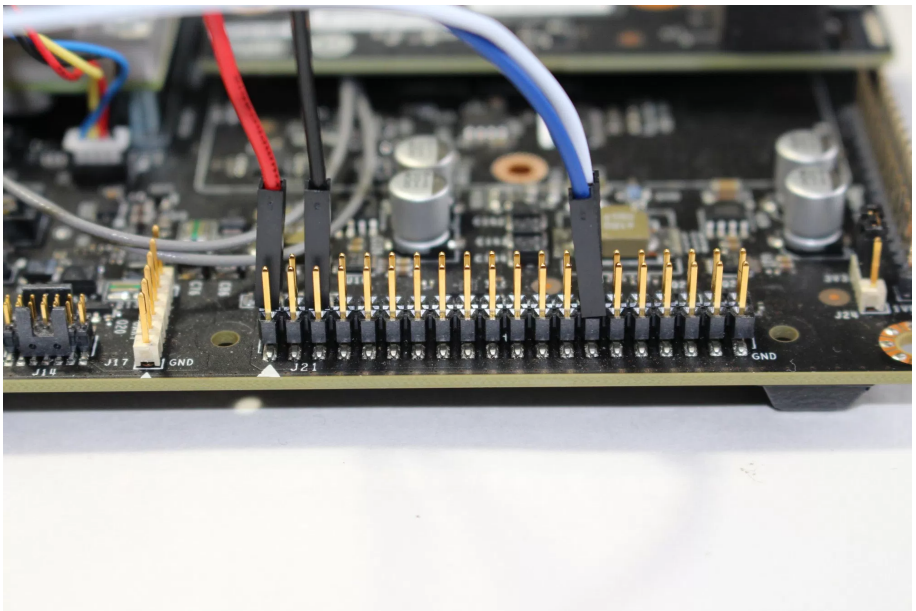

NVIDIA Jetson TX1/TX2 J21 Header

ANDROID BATTERY CAMERA CASE CUDA CUDNN DEEP LEARNING DEMONSTRATION ENCLOSURE GPS GSTREAMER GTC 2015 HACKING IMU INFORMATION IROBOT CREATE 2 JETPACK JETSON TK1 JETSONTK1 QUADCOPTER KINECT L4T 21.1 L4T 21.3 L4T 21.4 L4T 23.1 LIDAR-LITE LIPO MIT RACECAR MODULE NEWS OPENCV OPENFRAMEWORKS OPERATING SYSTEM ROBOTICS ROS SERIAL CONSOLE SKYRC B6AC V2 SPOTLIGHT TK1 TRAXXAS RALLY TURTLEBOT TX1 UART VISION WIFI WIRELESS

ARCHIVES

Select Month

META

Register

Log in

Entries RSS

Comments RSS

WordPress.org

ABOUT CONTACT US SITEMAP

Copyright @ JetsonHacks 2014-2018