


INTRODUCTION

The CE6210 Series are a group of positive voltage regulators manufactured by CMOS technology with high ripple rejection, ultra-fast transient response and low dropout voltage, which provide large output currents even when the difference of the input-output voltage is small. Each of the CE6210 series consists of a high-precision voltage reference, an error correction circuit, and a current limited output driver. Thus the series are very suitable for the battery-powered equipments, wireless communication applications, industry equipments and so on.

APPLICATIONS

- Battery powered systems
- Portable instrumentations
- PC peripherals

BLOCK DIAGRAM

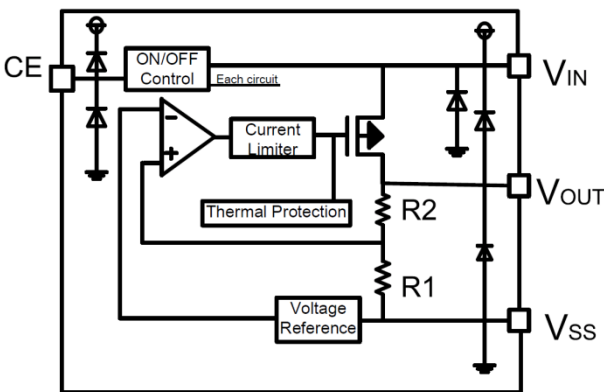

FEATURES


- Guaranteed Output Current: 1.0A(Typ.)
- Low Quiescent Current: 80μA (Typ.)
- Output Voltage Range: 1.1V~5.0V
- Input Voltage Range: 2.0V~6.0V
- High Accuracy: ±2% (Typ.)
- Dropout Voltage:
500mV@1.0A (3.0V Typ.)
- Excellent Line Regulation: 0.02%/V
- High PSRR : 70dB@1KHz
- Built-in Current Limiter & Thermal Protection
- Short Circuit Current Fold-back
- Output Capacitor: Ceramic Compatible

- CD/DVD-ROM, CD/RW
- Wireless devices
- Battery charger


ORDER INFORMATION

CE6210①②③④		
DESIGNATOR	SYMBOL	DESCRIPTION
①	A	Standard
	B	With Shutdown Function
②③	Integer	Output Voltage(1.1~5.0V) e.g:3.0V=②:3, ③:0
④	G	Package:SOT223
	P/PL	Package:SOT89
	M	Package:SOT23-5


■ PIN CONFIGURATION




SOT223



SOT89-3



SOT89-5



SOT23-5

CE6210AXX (SOT223,SOT89-3)

PIN NUMBER						PIN NAME	FUNCTION
SOT223			SOT89-3				
G	GW	GL	P	PW	PL		
1	1	2	1	1	2	V _{SS}	Ground
2	3	1	2	3	1	V _{IN}	Power input
3	2	3	3	2	3	V _{OUT}	Output

CE6210BXX (SOT23-5,SOT89-5)

PIN NUMBER			PIN NAME	FUNCTION
SOT23-5		SOT89-5		
M		P PL		
3		4 1	CE	Chip Enable
2		2 2	V _{SS}	Ground
4		3 3	NC	No Connection
1		5 4	V _{IN}	Power input
5		1 5	V _{OUT}	Output Pin

■ ELECTRICAL CHARACTERISTICS

CE6210 Series ($V_{IN}=V_{OUT}+1V$, $C_{IN}=C_{OUT}=4.7\mu F$, $T_a=25^\circ C$, unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	$V_{OUT}(E)$ (Note 2)	$I_{OUT}=100mA$	V_{OUT} *0.98	V_{OUT} (Note 1)	V_{OUT} *1.02	V
Supply Current	I_{SS}			80	120	μA
Shutdown Current	I_{SHDN}	$V_{CE}=V_{SS}$		0.1	1.0	μA
Output Current	I_{OUT}	—	1000	1300		mA
Dropout Voltage (Note 3)	V_{dif1}	$I_{OUT}=300mA$		150		mV
	V_{dif2}	$I_{OUT}=1000mA$		500		mV
Load Regulation	ΔV_{OUT}	$V_{IN}=V_{OUT}+1V$, $1mA \leq I_{OUT} \leq 1.0A$		30		mV
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} * V_{OUT}}$	$I_{OUT}=100mA$ $V_{OUT}+1V \leq V_{IN} \leq 6V$		0.02	0.2	%/V
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T * V_{OUT}}$	$I_{OUT}=100mA$ $-40^\circ C \leq T \leq +85^\circ C$		50		ppm/ $^\circ C$
Short Current	I_{Short}	$V_{OUT}=V_{SS}$		200		mA
Input Voltage	V_{IN}	—	2.0		6.0	V
Power Supply Rejection Rate	1KHz	PSRR	$I_{OUT}=100mA$	70		dB
	10KHz			50		
CE "High" Voltage	$V_{CE} "H"$		1.5		V_{IN}	V
CE "Low" Voltage	$V_{CE} "L"$				0.3	V
Thermal Shutdown Temperature	T_{SD}			150		$^\circ C$
Thermal Shutdown Temperature Hysteresis	ΔT_{SD}			30		$^\circ C$

NOTE:

1. V_{OUT} : Specified Output Voltage.
2. $V_{OUT}(E)$: Effective Output Voltage (i.e. The Output Voltage When $V_{IN} = (V_{OUT} + 1.0V)$ And Maintain A Certain I_{OUT} Value).
3. V_{diff} : The Difference Of Output Voltage And Input Voltage When Input Voltage Is Decreased Gradually Till Output Voltage Equals To 98% Of $V_{OUT}(E)$; When $V_{OUT} < 2.5V$, $V_{IN} \geq 2.5V$ Should be Guaranteed.

■ ABSOLUTE MAXIMUM RATINGS

(Unless otherwise specified, Ta=25°C)

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V _{IN}	V _{SS} -0.3~V _{SS} +7	V
Output Current		I _{OUT}	2000	mA
Output Voltage		V _{OUT}	V _{SS} -0.3~V _{IN} +0.3	V
Power Dissipation	SOT23-5	P _d	250	mW
	SOT89	P _d	600	mW
	SOT223	P _d	800	mW
Operating Temperature		T _{opr}	-40~+85	°C
Storage Temperature		T _{stg}	-40~+125	°C
Soldering Temperature & Time		T _{solder}	260°C, 10s	

■ TYPICAL APPLICATION CIRCUITS

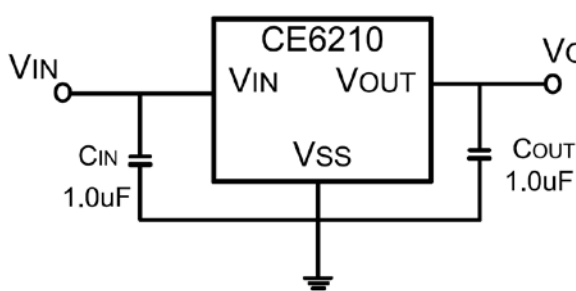


Figure1 CE6210A Typical Application
Circuit

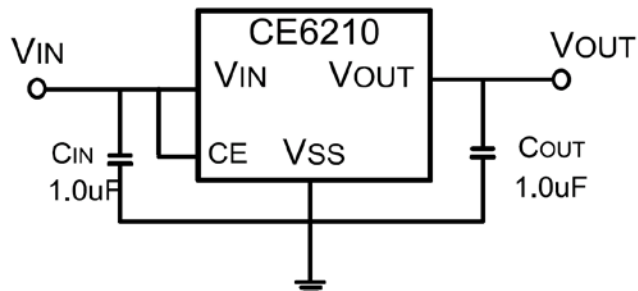


Figure2 CE6210B Typical Application
Circuit


Input capacitor (C_{IN}): 1.0μF or more;

Output capacitor (C_{OUT}): 1.0μF or more;


Caution: A general series regulator may oscillate, depending on the external components selected. Check that no oscillation occurs with the application using the above capacitor.

■ TYPICAL PERFORMANCE CHARACTERISTICS


(1) Input Transient Response

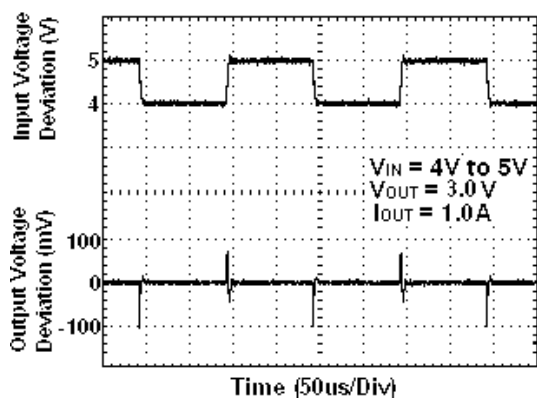


(2) Load Transient Response

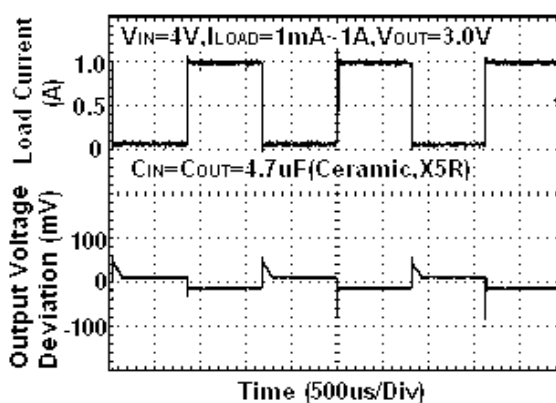



(3) Output Voltage vs. Temperature

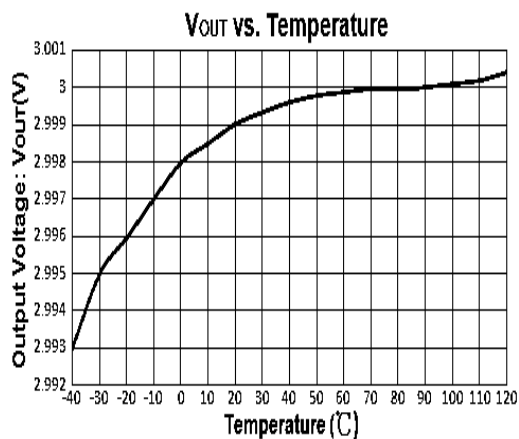


(4) Power Supply Rejection Ratio

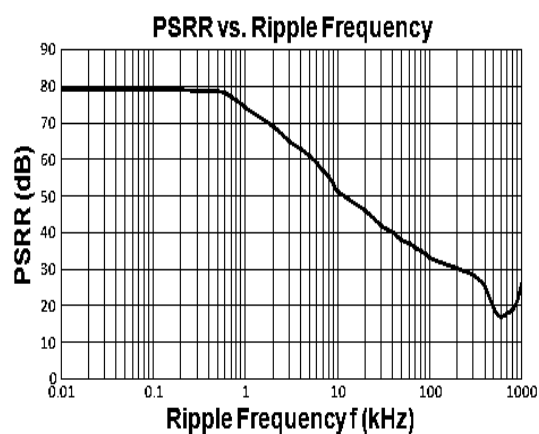

(5) Dropout Voltage vs. Output Current

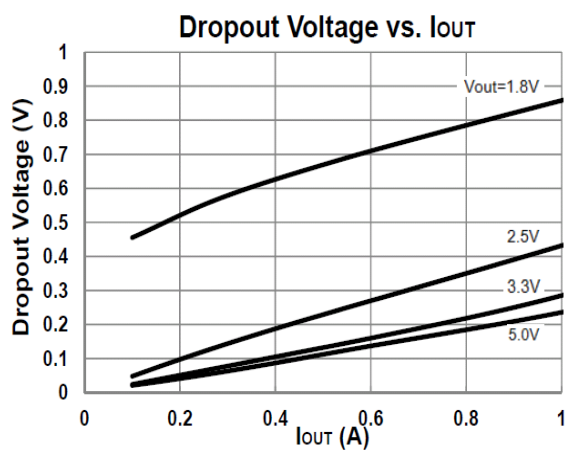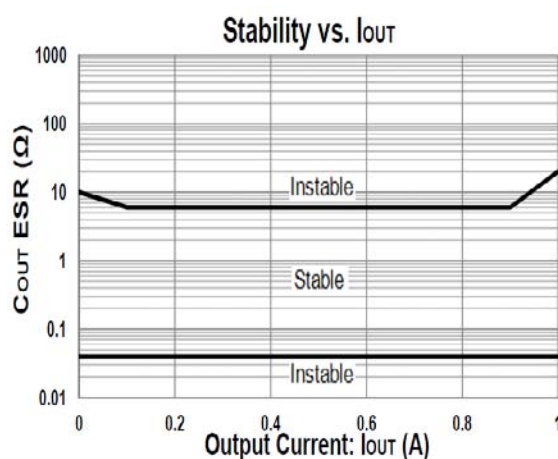
(6) Region of Stable C_{OUT} ESR vs. Load

- PACKAGING INFORMATION
- SOT23-5 PACKAGE OUTLINE DIMENSIONS

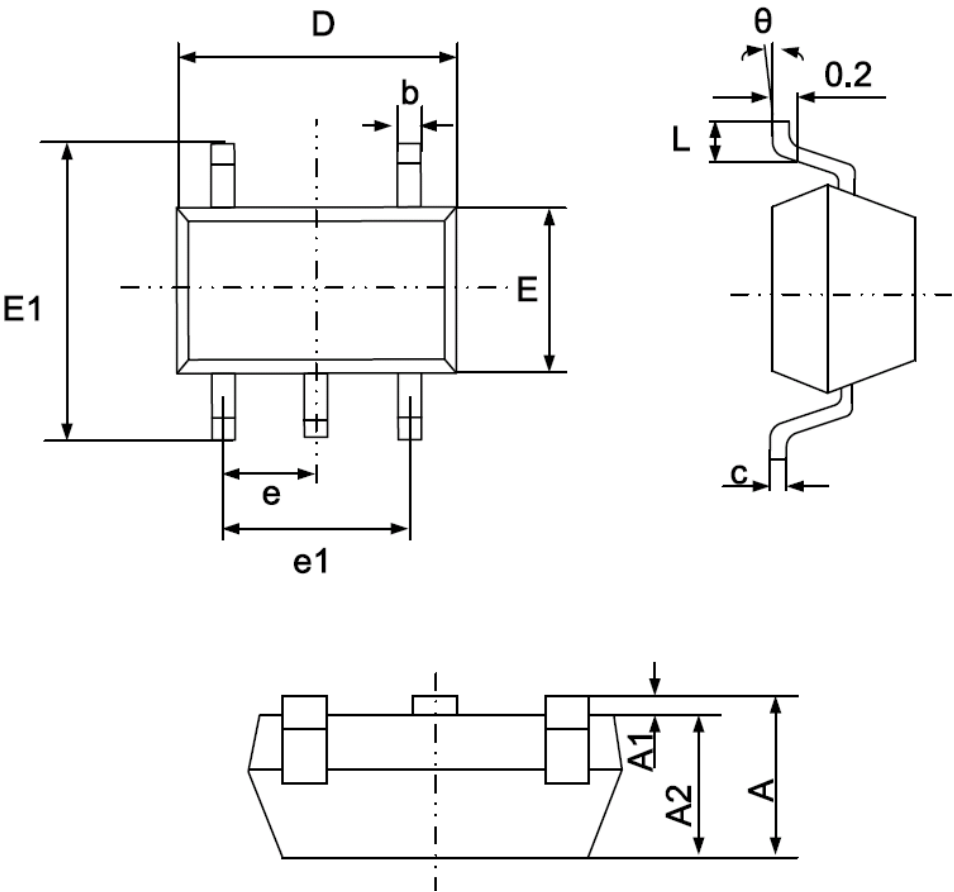


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

• SOT89-3 PACKAGE OUTLINE DIMENSIONS

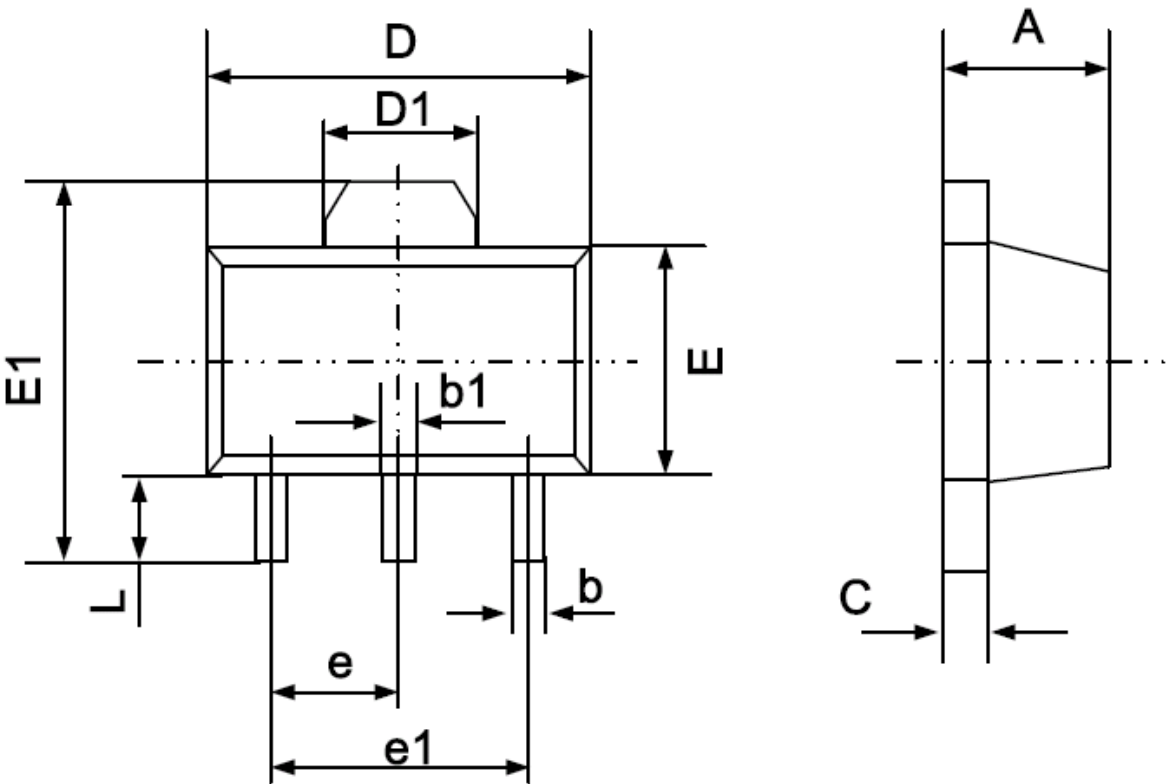


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047

• SOT89-5 PACKAGE OUTLINE DIMENSIONS

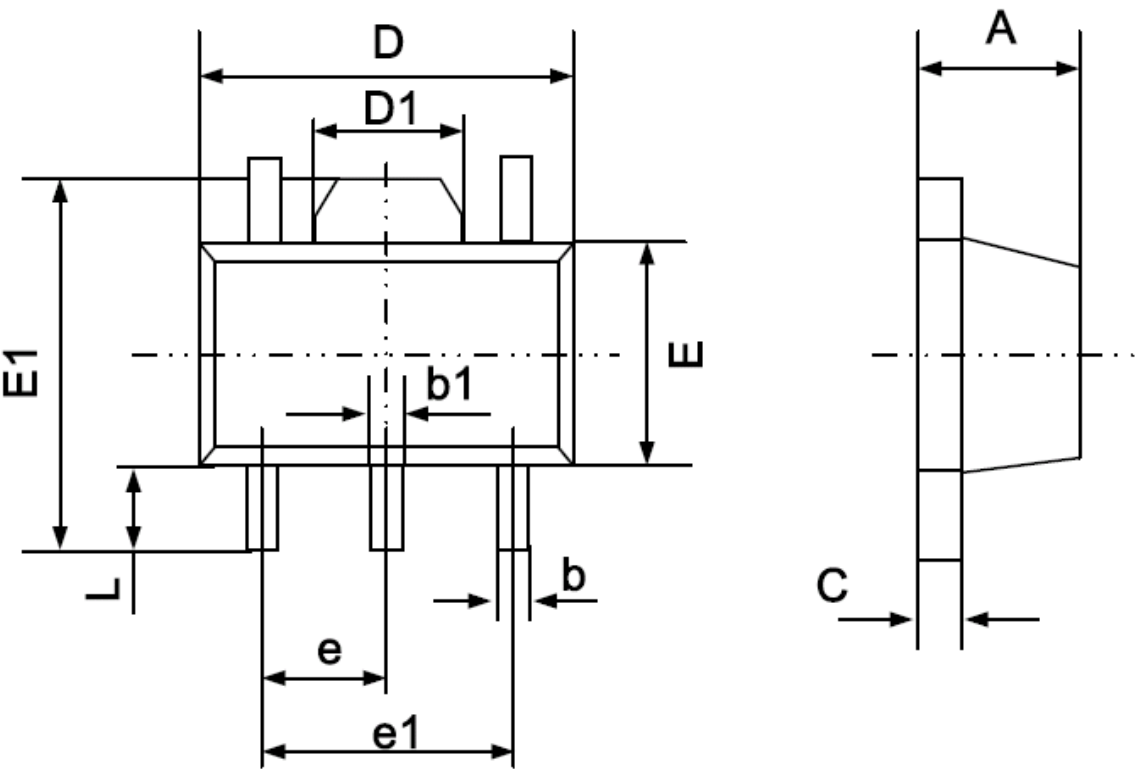

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043

• SOT223 PACKAGE OUTLINE DIMENSIONS

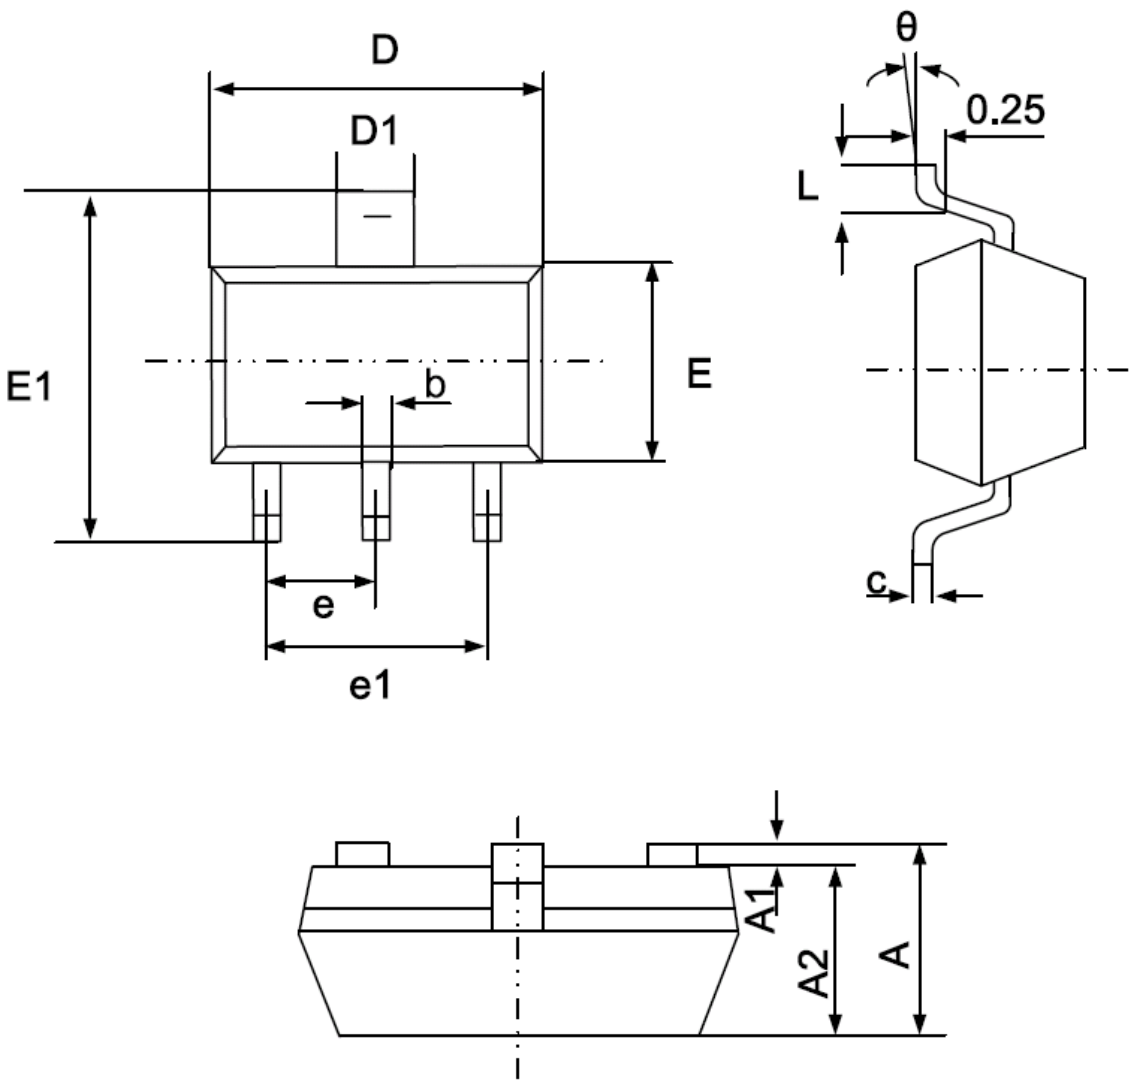

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.520	1.800	0.060	0.071
A1	0.000	0.100	0.000	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.820	0.026	0.032
c	0.250	0.350	0.010	0.014
D	6.200	6.400	0.244	0.252
D1	2.900	3.100	0.114	0.122
E	3.300	3.700	0.130	0.146
E1	6.830	7.070	0.269	0.278
e	2.300 (BSC)		0.091 (BSC)	
e1	4.500	4.700	0.177	0.185
L	0.900	1.150	0.035	0.045
θ	0°	10°	0°	10°

© Nanjing Chipower Electronics Inc.

Chipower cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Chipower product. No circuit patent license, copyrights or other intellectual property rights are implied. Chipower reserves the right to make changes to their products or specifications without notice. Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.