


```
sketch_jul10c.ino
3
4 // Replace with your actual Wi-Fi credentials
5 const char* ssid = "SC06";
6 const char* password = "System@1";
7
8 ESP8266WebServer server(80); // Start server on port 80
9
10 const int ledPin = 2; // Pin D1. Change to 2 if using the built-in ESP8266 LED
11
12 void handleRoot() {
13   String html = "<!DOCTYPE html><html>";
14   html += "<head><meta name='viewport' content='width=device-width, initial-scale=1'>";
15   html += "<style>body { text-align: center; font-family: Arial, sans-serif; margin-top: 50px; }";
16   html += "<a { display: inline-block; width: 150px; padding: 20px; font-size: 24px; text-decoration: none; border-radius: 5px; color: white; margin: 10px; }>";
17   html += ".btn-on { background-color: #4CAF50; }";
18   html += ".btn-off { background-color: #F44336; }</style>";
19   html += "</head><body>";
20   html += "<h1>ESP8266 Built-in LED Control</h1>";
21   html += "<a class='btn-on' href='\"/on\"'>Turn ON</a>";
22   html += "<a class='btn-off' href='\"/off\"'>Turn OFF</a>";
23   html += "</body></html>";
24   server.send(200, "text/html", html);
25 }
26
27 void handleOn() {
28   digitalWrite(ledPin, HIGH); // Turn LED ON
29   server.sendHeader("Location", "/");
30   server.send(303);
31 }
32
33 void handleOff() {
34   digitalWrite(ledPin, LOW); // Turn LED OFF
35   server.sendHeader("Location", "/");
36   server.send(303);
37 }
38
39 void setup() {
40   Serial.begin(115200);
41   pinMode(ledPin, OUTPUT);
42   digitalWrite(ledPin, LOW); // Default to OFF
43
44   // Connect to Wi-Fi
45   WiFi.begin(ssid, password);
46   Serial.print("Connecting to Wi-Fi");
47   while (WiFi.status() != WL_CONNECTED) {
48     delay(500);
49     Serial.print(".");
50   }
51   Serial.println("\nConnected!");
52   Serial.print("ESP8266 IP Address: ");
53   Serial.println(WiFi.localIP());
54
55   // Define server routes
```

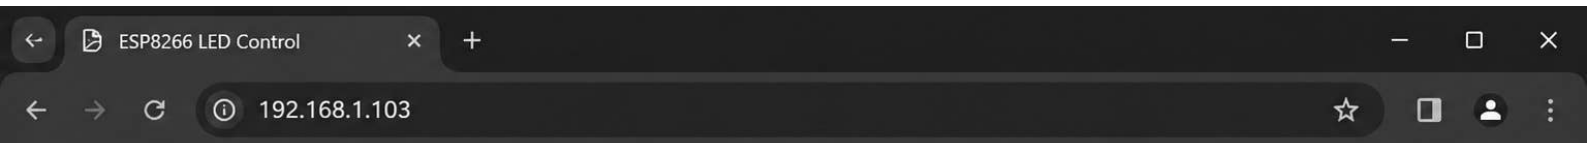

ESP8266 Built-in LED Control

Turn ON

Turn OFF