


라우팅 테이블 셋팅 및 통신 연결

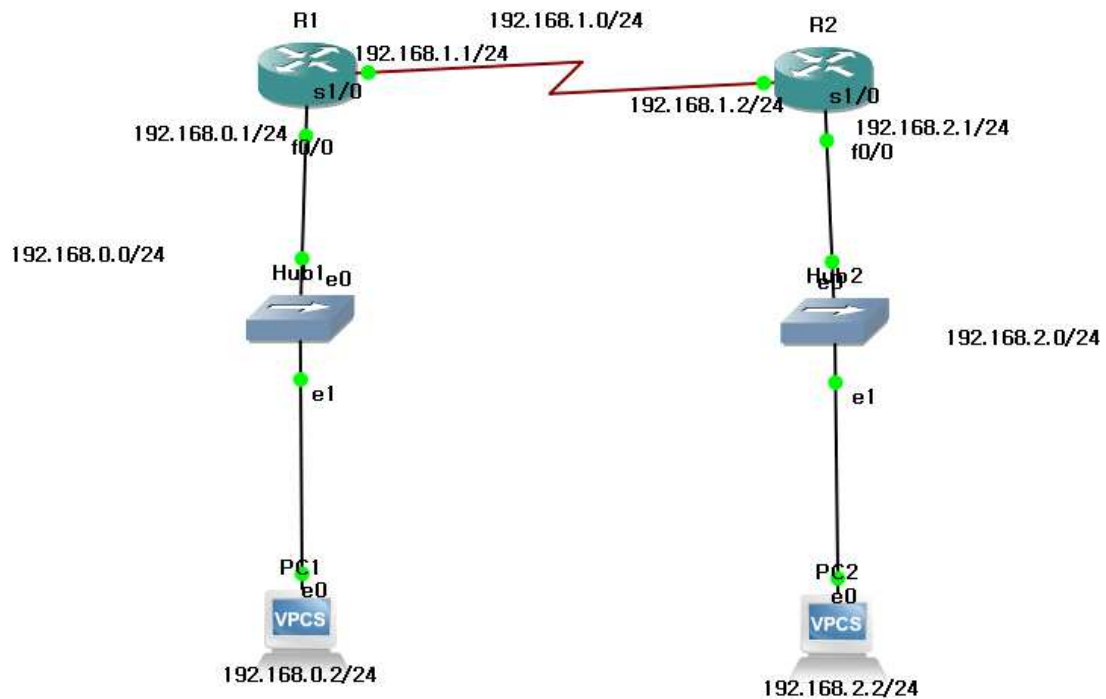

<pc1>

```
>ip 192.168.0.2 255.255.255.0 192.168.0.1
```

```
>sh ip (ip 주소 설정 확인)
```

NAME : PC1[1]

IP/MASK : 192.168.0.2/24

GATEWAY : 192.168.0.1

DNS :

MAC : 00:50:79:66:68:01

LPORT : 10018

RHOST:PORT : 127.0.0.1:10019

MTU: : 1500

<pc2>

```
>ip 192.168.2.2 255.255.255.0 192.168.2.1
```

```
>sh ip (ip 주소 설정 확인)
```

NAME : PC2[1]
IP/MASK : 192.168.2.2/24
GATEWAY : 192.168.2.1
DNS :
MAC : 00:50:79:66:68:00
LPORT : 10020
RHOST:PORT : 127.0.0.1:10021
MTU: : 1500

pc1
ip : 192.168.0.2
mac : 00:50:79:66:68:01

pc2
ip : 192.168.2.2
mac : 00:50:79:66:68:00

R1
conf t
int f0/0
ip add 192.168.0.1 255.255.255.0 (인터페이스에 아이피 설정/게이트웨이)
no sh
exit(생략가능)
int s1/0
ip add 192.168.1.1 255.255.255.0
no sh
end
sh ip int bri(아이피 할당과 잘 켜졌는지 확인)

R1#sh ip int bri

Interface		IP-Address	OK?	Method	Status
Protocol					
FastEthernet0/0	192.168.0.1	YES manual	up		up
Serial1/0	192.168.1.1	YES manual	up		up
Serial1/1	unassigned	YES unset	administratively down		down
Serial1/2	unassigned	YES unset	administratively down		down
Serial1/3	unassigned	YES unset	administratively down		down
Ethernet2/0	unassigned	YES unset	administratively down		down
Ethernet2/1	unassigned	YES unset	administratively down		down
Ethernet2/2	unassigned	YES unset	administratively down		down
Ethernet2/3	unassigned	YES unset	administratively down		down

SSLVPN-VIF0 unassigned NO unset up up

옆 네트워크와 라우팅

```
ip route 192.168.2.0 255.255.255.0 192.168.1.2
end
```

sh ip route로 확인

C: connected

S: static

Gateway of last resort is not set

C 192.168.0.0/24 is directly connected, FastEthernet0/0

C 192.168.1.0/24 is directly connected, Serial1/0

S 192.168.3.0/24 [1/0] via 192.168.1.2

R2

conf t

int f0/0

ip add 192.168.2.1 255.255.255.0

no sh

exit(생략가능)

int s1/0

ip add 192.168.1.2 255.255.255.0

no sh

end

sh ip int bri

R2#sh ip int bri

Interface		IP-Address	OK?	Method	Status
Protocol					
FastEthernet0/0	192.168.2.1	YES manual	up		up
Serial1/0	192.168.1.2	YES manual	up		up
Serial1/1	unassigned	YES unset	administratively down		down
Serial1/2	unassigned	YES unset	administratively down		down
Serial1/3	unassigned	YES unset	administratively down		down
Ethernet2/0	unassigned	YES unset	administratively down		down
Ethernet2/1	unassigned	YES unset	administratively down		down
Ethernet2/2	unassigned	YES unset	administratively down		down

Ethernet2/3	unassigned	YES	unset	administratively down	down
SSLVPN-VIF0	unassigned	NO	unset	up	up

옆 네트워크와 라우팅

```
ip route 192.168.0.0 255.255.255.0 192.168.1.1
end
```

sh ip route로 확인

Gateway of last resort is not set

```
S    192.168.0.0/24 [1/0] via 192.168.1.1
C    192.168.1.0/24 is directly connected, Serial1/0
C    192.168.2.0/24 is directly connected, FastEthernet0/0
```

C: connected

S: static

Gateway of last resort is not set

```
S    192.168.0.0/24 [1/0] via 192.168.1.1
C    192.168.1.0/24 is directly connected, Serial1/0
C    192.168.2.0/24 is directly connected, FastEthernet0/0
```

PC1과 PC2 서로 ICMP 패킷 보내서 통신이 잘 이루어지는지 확인(아주 야르)

핑 보내기 전에 와이어샤크로 ARP랑 ICMP 패킷의 src address와 dst address 어떻게 바뀌는지도 꼭 확인하고 이해하세요^^

끝!!!