

- Power
- GND
- Control
- CircuitPython Name
- GPIO
- INT
- DAC/AREF
- ADC
- Touch
- SERCOM
- SERCOM Alt
- Timer
- Timer Alt
- Special


Adafruit Feather M0 Adalogger

<https://www.adafruit.com/products/2796>

VBUS Connected to 5V USB port - absolute max 500mA

VBAT The positive voltage from the JST battery jack

3.3V 3.3V output from regulator - absolute max 400mA

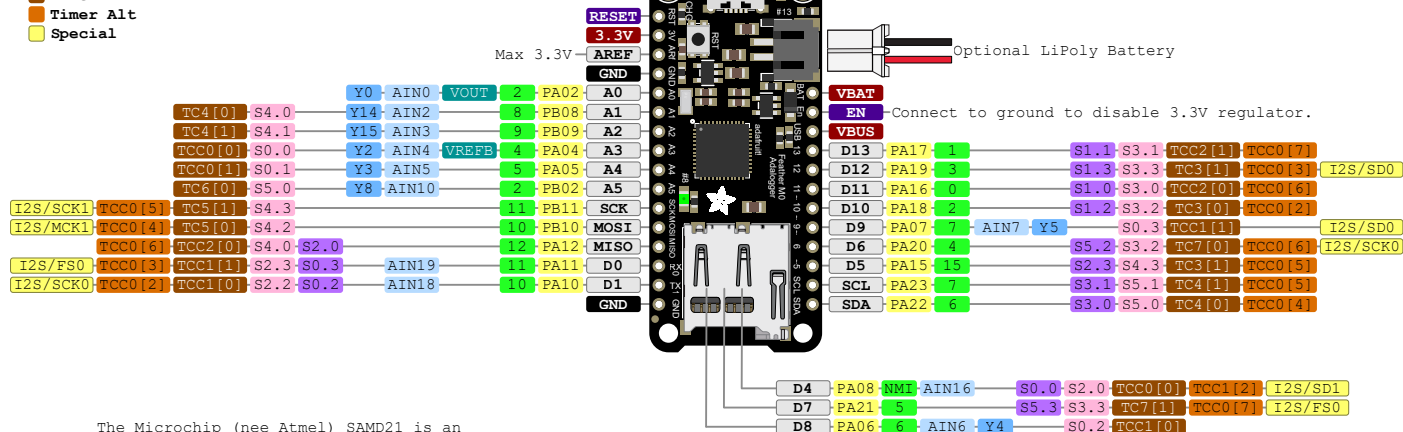

The Microchip (nee Atmel) SAMD21 is an ARM Cortex-M0+ running at 48 MHz with 32kB on-chip SRAM, 256KB Flash memory and built in USB. All GPIO is 3.3V in/out max unless otherwise stated. SERCOMs can be used as UART (TX on SERCOM pad 0 or 2, RX on any pad), I2C (SDA on pad 0, SCL on pad 1), or SPI (SCK on pad 1 or 3, MOSI on pad 0 or 3 (SCK on pad 1) or pad 0 or 2 (SCK on pad 3), MISO on any pad remaining)